



ELECTRICAL SPECIFICATION

RATED VOLTAGE	250V AC
RATED CURRENT	6 AMPS @40°C
LINE FREQUENCY	50/60Hz
TEMPERATURE RANGE	-25°C TO 85°C
EARTH LEAKAGE CURRENT	0.47mA
TEST VOLTAGE	2.0KV DC
TERMINATIONS:-	IEC320 APPLIANCE INLET IEC320 APPLIANCE OUTLET

ELECTRICAL SCHEMATIC

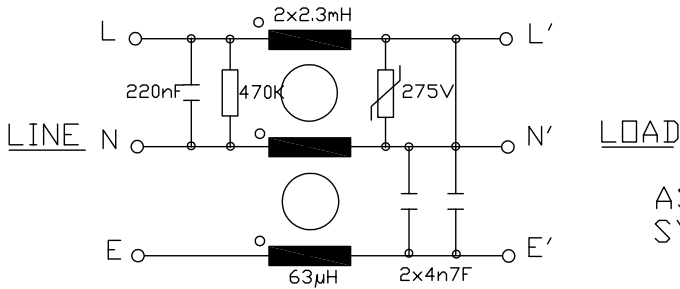

TYPICAL ATTENUATION (dB)

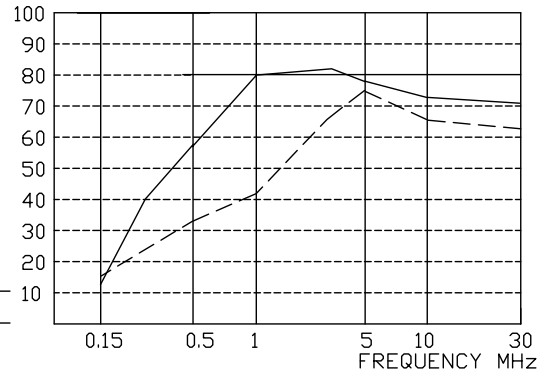

ALL DIMENSIONS IN MM / ANGLES IN DECIMAL DEGREES

DrgNo PMF6-GS				TITLE PMF6 PORTABLE MAINS FILTER			
ROXBURGH EMC		ISSUE 1		GENERAL SPECIFICATION FOR PMF6		CUSTOMER	
						FILTER REF	
Sheet 1 of 1	Aprvd Date 13/12/01	Aprvd By SW	Drwn by BS	SCALE NTS	CNN---	Location N: \DWG\GS\GS000275	
©DELTRON EMCON LTD, ROXBURGH HOUSE, FOXHILLS INDUSTRIAL PARK, SCUNTHORPE, NORTH LINCOLNSHIRE, DN15 8QJ TEL +44 1724 281770 F +44 1724 270230							