

### Description

- Miniature surface mount design with rugged case to eliminate core breakage
- Inductance range from 0.470uH to 1000uH
- Current range up to 18.6 Amps peak
- Meets UL94V-0 flammability standard
- Ferrite core material



### Applications

- PDA, computer, and flash memory programs

### Environmental Data

- Storage temperature range: -40°C to +125°C
- Operating ambient temperature range: -40°C to +85°C (range is application specific)
- Solder reflow temperature: +260°C max. for 10 seconds max.

### Packaging





- Supplied in tape and reel packaging, 900 per reel

Part Number	Inductance $\mu\text{H}$ (rated)	OCL <sup>(1)</sup> $\mu\text{H}\pm 20\%$	I <sub>RMS</sub> <sup>(2)</sup> Amperes	I <sub>SAT</sub> <sup>(3)</sup> Amperes	DCR <sup>(4)</sup> m $\Omega$ typ.	Volts <sup>(5)</sup> $\mu\text{S}$ (typ)
UP2C-R47-R	0.470	0.48	12.2	18.6	2.5	4.15
UP2C-1R0-R	1.0	1.03	9.80	11.8	3.9	7.0
UP2C-1R5-R	1.5	1.45	8.10	10.0	5.6	8.3
UP2C-2R2-R	2.2	2.00	7.50	8.67	6.6	9.6
UP2C-3R3-R	3.3	3.30	5.90	6.84	10.5	12.1
UP2C-4R7-R	4.7	4.41	5.62	6.20	11.7	13.4
UP2C-6R8-R	6.8	7.16	4.42	4.82	18.0	17.3
UP2C-100-R	10.0	10.56	3.61	3.94	28.3	21.1
UP2C-150-R	15.0	15.97	3.17	3.17	36.9	26.2
UP2C-220-R	22.0	22.33	2.61	2.65	54.0	31.3
UP2C-330-R	33.0	32.11	2.16	2.20	79.7	37.7
UP2C-470-R	47.0	47.90	1.77	1.83	118.5	45.4
UP2C-680-R	68.0	65.03	1.57	1.53	151.7	54.3
UP2C-101-R	100.0	97.85	1.26	1.24	233.1	67.1
UP2C-151-R	150.0	141.9	1.04	1.02	351.4	81.2
UP2C-221-R	220.0	207.8	0.82	0.85	545.0	97.8
UP2C-331-R	330.0	318.2	0.67	0.70	824.3	120
UP2C-471-R	470.0	470.8	0.56	0.58	1191.4	144
UP2C-681-R	680.0	689.7	0.46	0.48	1774.2	173
UP2C-102-R	1000.0	1080.0	0.38	0.40	2657.1	209

**Notes:** (1) Open Circuit Inductance Test Parameters: 100KHz, .250Vrms, 0.0Adc.  
 (2) RMS current for an approximate  $\Delta T$  of 40°C without core loss, at an ambient temperature of 85°C.  
 (3) Peak current for approximately 30% rolloff @ 20°C.

(4) DCR limits 20°C.  
 (5) Applied volt-time product (V-uS) across the inductor. This value represents the applied v-us at 300KHz necessary to generate a core loss equal to 10% of the total losses for a 40° temperature rise.


### Mechanical Diagrams



Dimensions in Millimeters.  
 wwllly = (date code) R = revision level  
 xxx = Inductance value per family chart


(A) 2.5mm max is width of copper at seating plane. The width above the seating plane may exceed 2.5mm.

**Packaging Information**

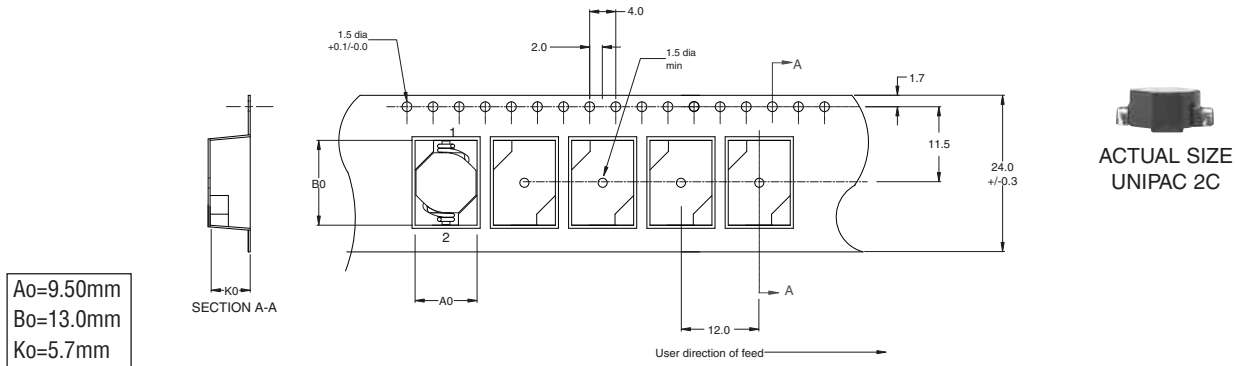


**Inductance Characteristics**

**OCL vs. Isat**

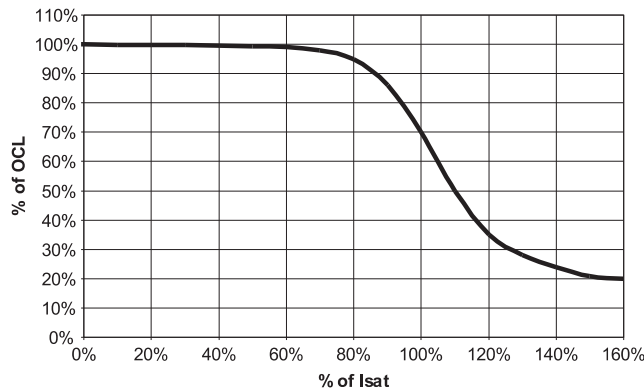

**Core Loss**

**IRMS DERATING WITH CORE LOSS**

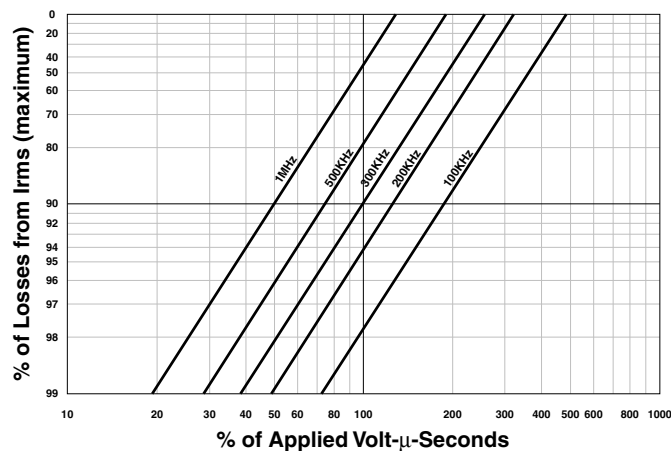

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Electronic Technologies reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Electronic Technologies also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Electronic Technologies does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.