

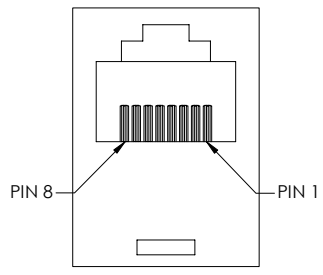


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED FOR PRODUCTION	10/10/01	TJC
B	ADDED PRODUCT VALIDATION. DELETED METRIC DIMENSIONS (ECN1313)	03/07/03	DFP

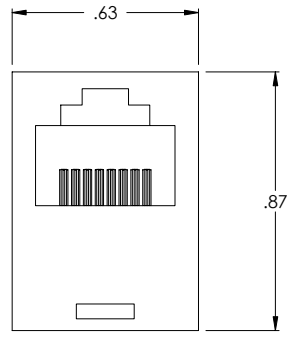

RJ45 JACK
(8 X 8)

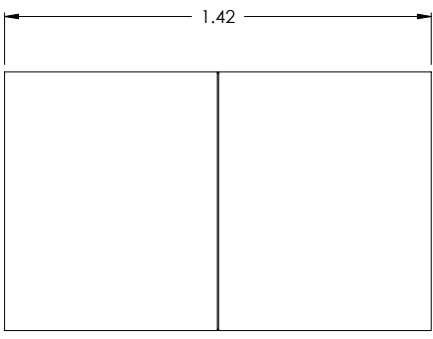

RJ45 JACK
(8 X 8)



SPECIFICATIONS:
 MEETS REQUIREMENTS OF FCC PART 68.5
 UL94V-0 COMPLIANT
 CSA CERTIFIED: CUL
 CATEGORY 3 RATED

MATERIALS:
 HOUSING: ABS
 COLOR: IVORY
 CONTACTS: PHOSPHOR BRONZE
 CONTACT PLATING: 15 μINCHES GOLD OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1.5 AMP MAX
 VOLTAGE RATING: 1000 VOLTS

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: 0°C TO 60°C

APPLICATION:
 FEED THROUGH COUPLER

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 .X ±.1
 .XX ±.05
 .XXX ±.005
 CABLE LENGTH TOLERANCE
 <300' ±3% >300' ±2%

APPROVALS	DATE
DRAWN	
TJC	10/2/01
CHECKED	
DFP	10/4/01
APPROVED BY	
RC	10/9/01

L-com
 CONNECTIVITY PRODUCTS
 45 BEECHWOOD DRIVE
 NORTH ANDOVER, MA
 01845

PRODUCT DESCRIPTION
MODULAR ADAPTOR (RJ45)

DRAWING TITLE
OUTLINE DRAWING

SIZE A	FSCM NO. 43321	DWG. NO. TDG1026-8C-OD1	REV. B
SCALE 1:1	CAD FILE TDG1026-8C-OD1.SLDDRW	SHEET 1 OF 1	

CONFIGURATION DETAILS OF
 UNDIMENSIONED FEATURES
 MAY VARY