
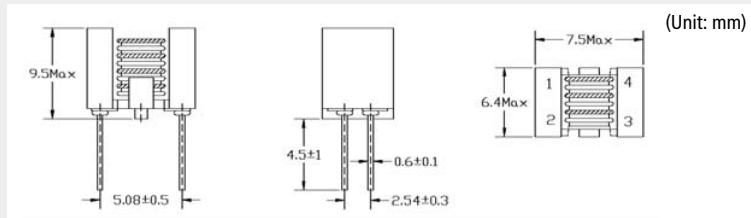


EXTERNAL DIMENSIONS

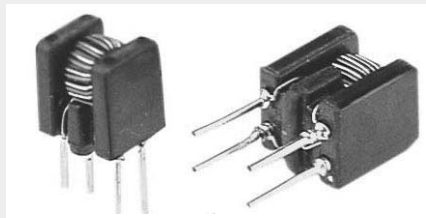

Test Equipment and Conditions

- Operating Temperature Range : - 25°C to + 85°C

Features

- Easy mounting on pc board.
- L-element circuit ensures excellent attenuation characteristics over a wide frequency range.


Applications

- EMI countermeasures at signal lines of personal computers microcomputers ,peripheral devices , etc.
- Countermeasures against common-mode noise at composite video signals.


Specifications

Part Number	PARALLEL			SERIES		
	Inductance (μH) @1KHz	Impedance (Ω) min.	DC Resistance (mΩ) max.	Inductance (μH) @1KHz	Impedance (Ω) min.	DC Resistance (mΩ) max.
SBC-75-350	35±50%	400@100MHz	30	120(Typ)	1575@40MHz	60
SBC-75-600	60±35%	800@ 80MHz	40	200(Typ)	3000@20MHz	80
SBC-75-101	100±35%	1100@ 50MHz	55	300(Typ)	4700@10MHz	110



CIRCUIT



TEST CIRCUIT

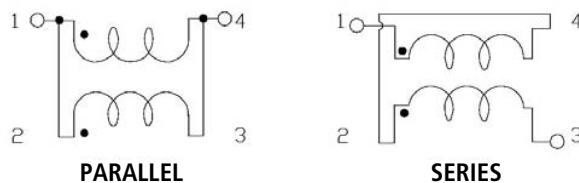


Impedance-Frequency Characteristics

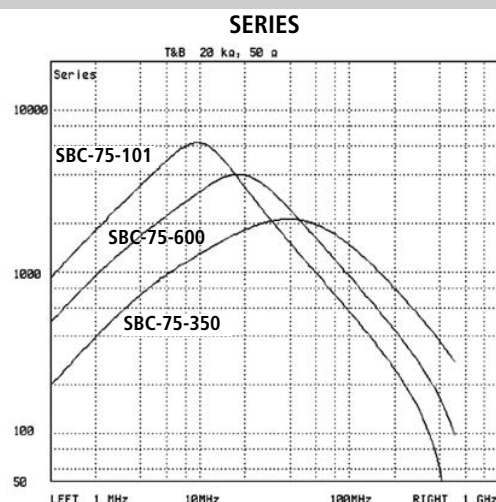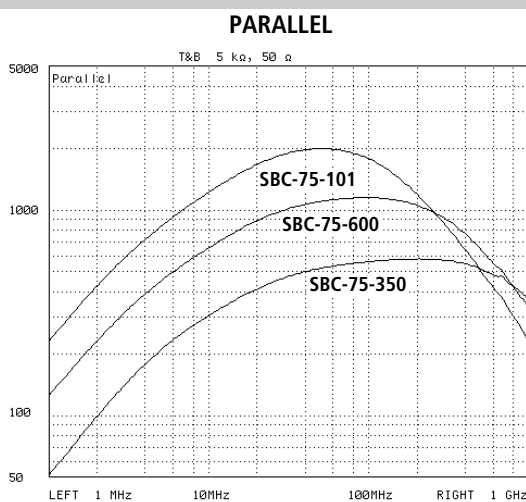

KE KITAGAWA

Elbinger Straße 3-5 · D-63110 Rodgau-Jügesheim · Germany · Telefon +49-6106-8524-0 · Telefax +49-6106-8524-30 (31)

EXTERNAL DIMENSIONS

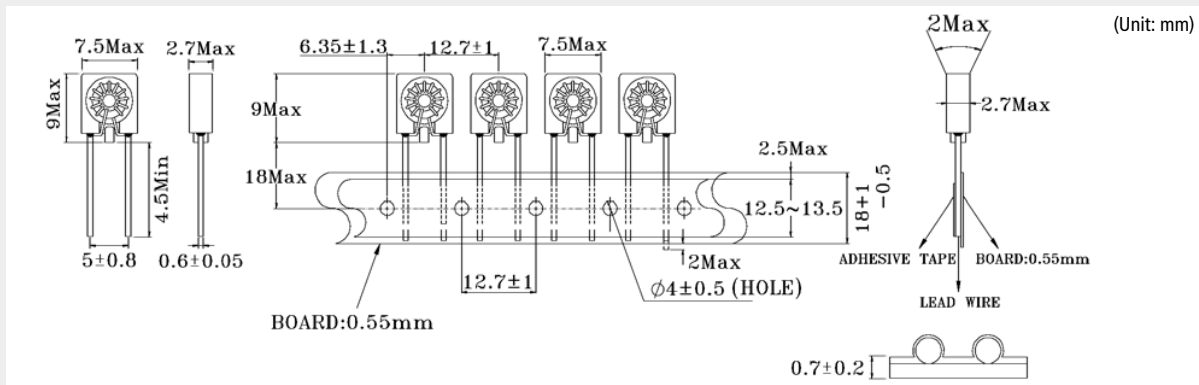

Test Equipment and Conditions


- Operating Temperature Range : - 25°C to + 85°C

Features

- Unique configuration
- Ideal for EMI filters.
- Core is Ni-Zn ferrite.
- Base material is Phenolic.
- Highly accurate dimensions and taped for automatic inserting.

Applications



- EMI line filter.
- Personal computers.
- Microcomputer and peripheral devices.
- VCD, DVD and TV circuit.

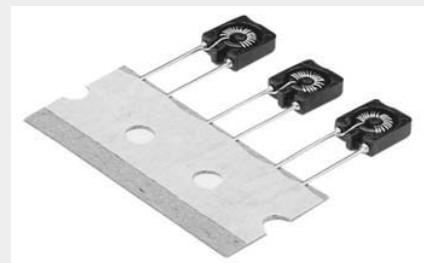

Specifications

Part Number	Inductance (μH) @1KHz	Test Frequency (MHz)	Impedance (Ω) min.	Rated DC Current (mA)	DC Resistance (mΩ) max.)
SBC-80-080	8±50%	300	165	500	15
SBC-80-100	10±50%	200	205	500	15
SBC-80-400	40±50%	120	770	500	25
SBC-80-600	60±50%	60	1360	500	30
SBC-80-800	80±50%	60	1680	500	35
SBC-80-121	120±50%	50	2500	250	95
SBC-80-151	150±50%	30	3960	250	110


Impedance-Frequency Characteristics

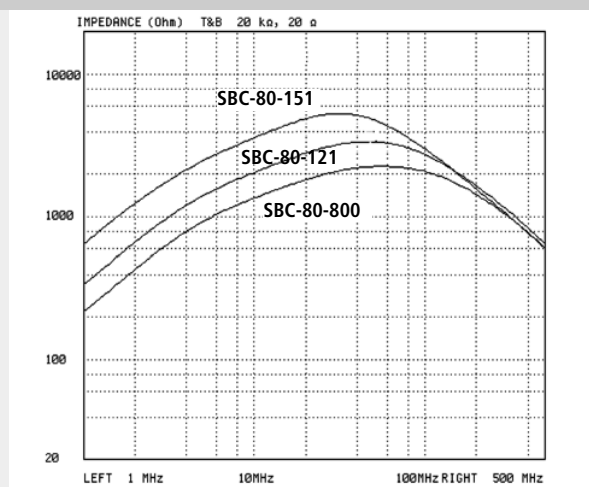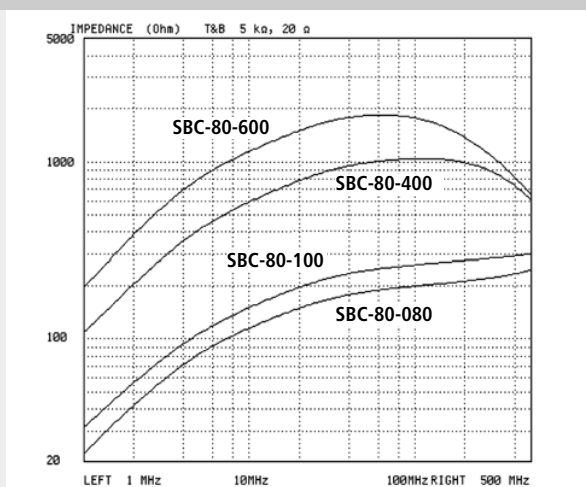

KE KITAGAWA

Elbinger Straße 3-5 · D-63110 Rodgau-Jügesheim · Germany · Telefon +49-6106-8524-0 · Telefax +49-6106-8524-30 (31)

EXTERNAL DIMENSIONS

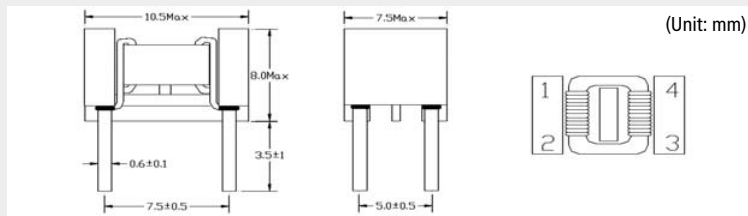

Test Equipment and Conditions

- Operating Temperature Range : - 25°C to + 85°C

Features

- Compact size high performance and low cost.
- Large impedance at high frequencies.
- Excellent high frequency characteristics.


Applications

- Applied equipment: TV, VCR, Switching power sources, NC machines, Computes systems and Measuring instruments.


Specifications

Part Number	PARALLEL			SERIES		
	Inductance (μH) @1KHz	Impedance (Ω) min.	DC Resistance (mΩ) max.	Inductance (μH) @1KHz	Impedance (Ω) min.	DC Resistance (mΩ) max.
SBC-90-200	20±50%	540@250MHz	26	150(Typ)	2000@70MHz	53
SBC-90-101	100±35%	1200@100MHz	70	400(Typ)	3800@50MHz	190


CIRCUIT



TEST CIRCUIT

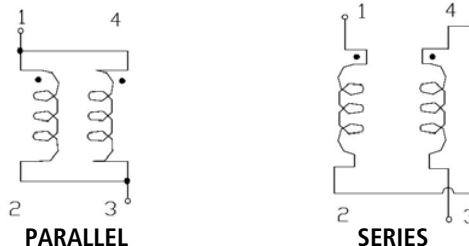



Impedance-Frequency Characteristics

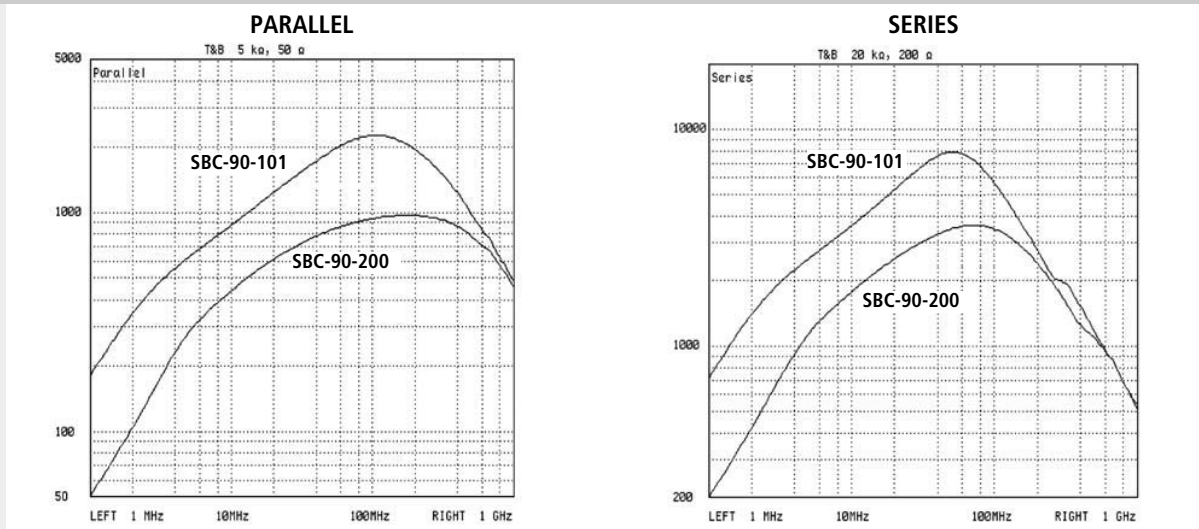

KE KITAGAWA

Elbinger Straße 3-5 · D-63110 Rodgau-Jügesheim · Germany · Telefon +49-6106-8524-0 · Telefax +49-6106-8524-30 (31)

EXTERNAL DIMENSIONS

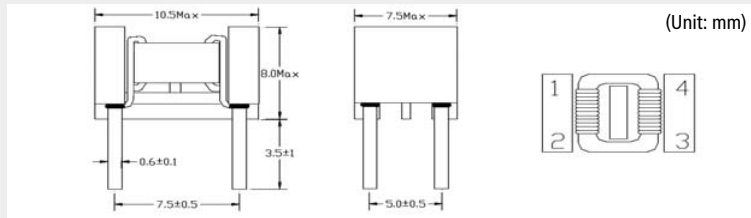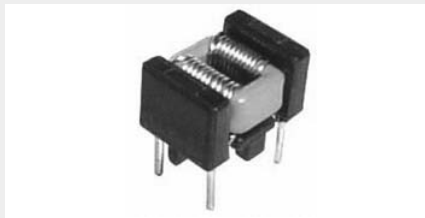

Test Equipment and Conditions

- Operating Temperature Range : - 25°C to + 85°C

Features


- Compact size high performance and low cost.
- Large impedance at high frequencies.
- Excellent high frequency characteristics.

Applications

- Applied equipment: TV, VCR, Switching power sources, NC machines, Computes systems and Measuring instruments.

Specifications

Part Number	Inductance (μH)	Impedance (Parallel) (mΩ) min.	DC Resistance (mΩ) max.
SBC-95-170	17±20%@100KHz	390@300MHz	25
SBC-95-270	27±50%@1KHz	900@50MHz	30

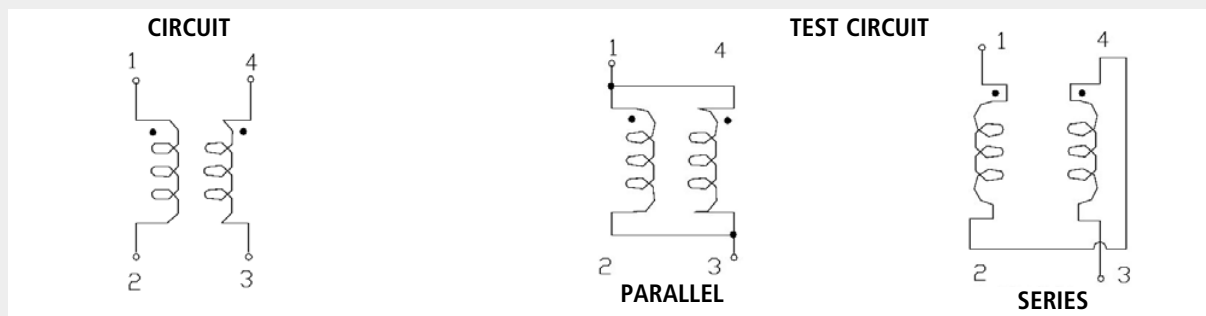

Impedance-Frequency Characteristics

