

HP06 Series High Power Resistors




Specification Table

Type	Power Rating (W)	Maximum Working Voltage (V)	Maximum Overload Voltage (V)	Dielectric Withstanding Voltage (V)	Temperature Range (°C)	Ambient Temperature (°C)
HP06	0.50	50	100	300	-55 to +155	70

Power Rating:

Resistors shall have a power rating based on continuous load operation at an ambient temperature of 70°C. For temperature in excess of 70°C, the load shall be derate.

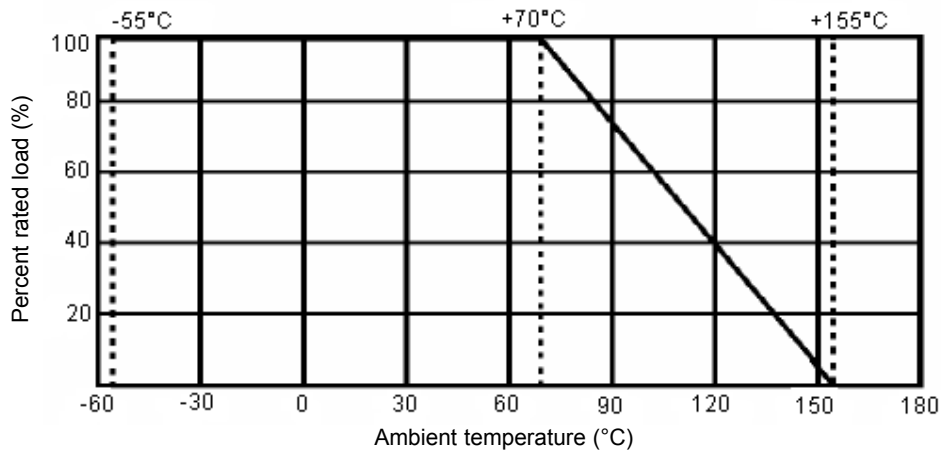

Voltage rating:

Resistors shall have a rated direct-current (DC) continuous working voltage or an approximate sine-wave root-mean-square (RMS) alternating-current (AC) continuous working voltage at commercial-line frequency and waveform corresponding to the power rating, as determined from the following formula :

$$RCWV = \sqrt{P \times R}$$

Where : RCWV = Rated DC or RMS AC continuous working voltage at commercial-line frequency and waveform (volt).

P = Power rating (watt)

R = Nominal resistance (ohm)


In no case shall the rated DC or RMS AC continuous working voltage be greater than the applicable maximum value.



HP06 Series High Power Resistors




Construction:

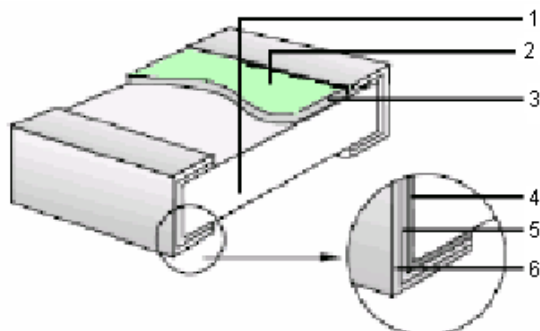

- 1. High Purity Alumina Substrate.
- 2. Protective covering.
- 3. Resistive covering.
- 4. Termination inner (Ag/Pd).
- 5. Termination (between) Ni plating.
- 6. Termination (outer) Sn plating.

Power rating and dimensions

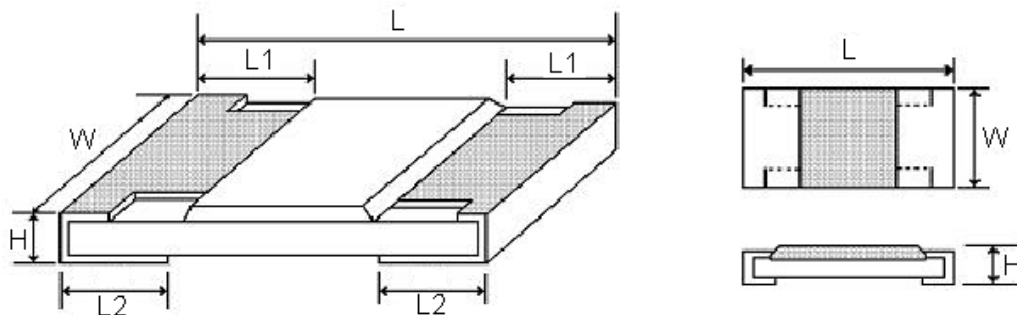

Dimensions : Millimetres

Dimensions

Type	L	W	H	L1	L2
HP06	3.10 ± 0.15	$1.55 + 0.15$ $- 0.10$	0.55 ± 0.10	0.45 ± 0.20	0.45 ± 0.20


Dimensions : Millimetres

Power Rating

Type	Power Rating at 70°C (W)	Tolerance %	Resistance Range (Ω)	Standard Series
HP06	0.50	± 1	1 to 10M	E-96

Marking on the Resistors

A. $\pm 1\%$ Tolerance : 4 Digits, the first three digits are significant figures of resistance and the fourth digit denoted number of zeros. Letter "R" is for decimal point.



HP06 Series High Power Resistors



Performance specification

Characteristics	Limits	Test Methods (JIS C 5201-1)															
Temperature coefficient	$\leq 10E: \pm 200\text{PPM}/^{\circ}\text{C}$ $> 10E: \pm 100\text{PPM}/^{\circ}\text{C}$	Natural resistance change per temperature degree centigrade $R2-R1 / R1 (t2-t1) \times 10^6 \text{ (PPm}/^{\circ}\text{C)}$. R1 : Resistance value at room temperature (t1) R2 : Resistance value at room temperature plus 100°C (t2). Test pattern : Room temperature(t1), Room temperature+100°C(t2)															
Short time overload	Resistance change rate is $\pm 5\% (2.0\% + 0.1\Omega)$ maximum $\pm 1\% (1.0\% + 0.1\Omega)$ maximum	Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.															
Terminal bending	$\pm (1.0\% + 0.05\Omega)$ maximum	Twist of Test Board : Y/X = 3/90 mm for 60 seconds.															
Dielectric withstanding voltage	No evidence of flashover mechanical damage, arcing or insulation break down	Clamped in the trough of a 90°C metallic V-BLOCK and shall be tested at AC potential respectively specified in the type for 60-70 seconds.															
Solderability	Minimum 95% coverage	Test temperature of solder : $245 \pm 3^{\circ}\text{C}$; dipping time in Soldwe : 2-3 seconds.															
Soldering heat	Resistance change rate is $\pm(1\%+0.05\Omega)$ maximum	Dip The Resistor Into a Solder Bath Having a Temperatuer of $260^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and hold it for 10 ± 1 Seconds.															
Temperature cycling	$5\% (1.0\% + 0.05\Omega)$ maximum $\pm 1\% (0.5\% + 0.05\Omega)$ maximum	Resistance change after continuous 5 cycles for duty cycle specified below: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Step</th> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$</td> <td>30 minutes</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>10 to 15 minutes</td> </tr> <tr> <td>3</td> <td>$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$</td> <td>30 minutes</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>10 to 15 minutes</td> </tr> </tbody> </table>	Step	Temperature	Time	1	$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$	30 minutes	2	Room temperature	10 to 15 minutes	3	$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$	30 minutes	4	Room temperature	10 to 15 minutes
Step	Temperature	Time															
1	$-55^{\circ}\text{C} \pm 3^{\circ}\text{C}$	30 minutes															
2	Room temperature	10 to 15 minutes															
3	$+155^{\circ}\text{C} \pm 2^{\circ}\text{C}$	30 minutes															
4	Room temperature	10 to 15 minutes															
Load life in humidity	Resistance change rate is $\pm 5\% (3.0\% + 0.1\Omega)$ maximum $\pm 1\% (1.0\% + 0.1\Omega)$ maximum	Resistance change after 1000 hours (1.5 hours "on", 0.5 hour "off") at RCWV in a humidity chamber controlled at $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and 90 to 95% relative humidity.															
Load life	Resistance change rate is $\pm 5\% (3.0\% + 0.1\Omega)$ maximum $\pm 1\% (1.0\% + 0.1\Omega)$ maximum	Permanent resistance change after 1000 hours operating at RCWV with duty cycle of (1.5 hours "on", 0.5 hour "off") at $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ambient.															



HP06 Series High Power Resistors



Resistance Preferred Value Range

E6	E12	E24	E96	E6	E12	E24	E96	E6	E12	E24	E96
10	10	10	10.0				21.5				46.4
			10.2	22	22	22	22.1	47	47	47	47.5
			10.5				22.6				48.7
			10.7				23.2				49.9
		11	11.0				23.7			51	51.1
			11.3			24	24.3				52.3
			11.5				24.9				53.6
			11.8				25.5				54.9
	12	12	12.1				26.1	56	56	56	56.2
			12.4				27.7				57.6
			12.7		27	27	27.4				59.0
		13	13.0				28.0				60.4
			13.3				28.7			62	61.9
			13.7				29.4				63.4
			14.0			30	30.1				64.9
			14.3				30.9				66.5
			14.7				31.6	68	68	68	68.1
15	15	15	15.0				32.4				69.8
			15.4	33	33	33	33.2				71.5
			15.8				34.0				73.2
		16	16.2				34.8			75	75.0
			16.5				35.7				76.8
			16.9			36	36.5				78.7
			17.4				37.4				80.6
			17.8				38.3	82	82	82	82.5
	18	18	18.2		39	39	39.2				84.5
			18.7				40.2				86.6
			19.1				41.2				88.7
			19.6				42.2			91	90.9
		20	20.0			43	43.2				93.1
			20.5				44.2				95.3
			21.0				45.3				97.6


Above values in accordance with IEC Publication 63 (1963) and BS2488



HP06 Series High Power Resistors



Part Number Explanation:

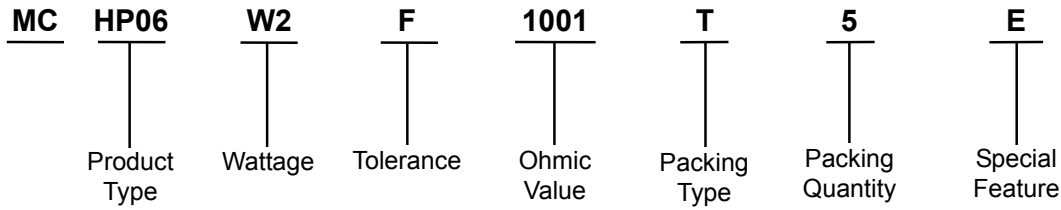

- Product Type** : HP06 = 1206.
- Wattage** : W2 = 1/2W.
- Tolerance** : F = $\pm 1\%$.
- Ohmic Value** : Where R = Ohms = Ω .
 K = Kiloohms = $K\Omega$.
 M = Megaohms = $M\Omega$.
 And replaces the decimal point.
 eg: 1R5 = 1.5Ω .
 4K7 = $4.7K\Omega$.
 6M8 = $6.8M\Omega$.
- Packing Type** : T = T/R Packing.
- Packing Quantity** : 5 = 5000 pieces.
- Special Feature** : E = Lead free.

Stocked Values

Tolerance	Wattage (W)	Preferred Value Range	Range Value
1%	0.063	E96	1R5 - 1M
1%	0.1	E24	1R5 - 1M
1%	0.125	E24	10R - 1M



HP06 Series High Power Resistors



Notes:

International Sales Offices:

 AUSTRALIA - Farnell Tel No: ++61 1300 361 005 Fax No: ++61 1300 361 225	 FINLAND - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ITALY - Farnell Tel No: ++39 02 93 995 200 Fax No: ++39 02 93 995 300	 SPAIN - Farnell Tel No: 901 20 20 80 Fax No: 901 20 20 90
 AUSTRIA - Farnell Tel No: ++43 662 2180 680 Fax No: ++43 662 2180 670	 FRANCE - Farnell Tel No: ++33 474 68 99 99 Fax No: ++33 474 68 99 90	 MALAYSIA - Farnell-Newark Tel No: ++60 3 7873 8000 Fax No: ++60 3 7873 7000	 SWEDEN - Farnell Tel No: ++46 8 730 50 00 Fax No: ++46 8 83 52 62
 BELGIUM - Farnell Tel No: ++32 3 475 2810 Fax No: ++32 3 227 3648	 GERMANY - Farnell Tel No: ++49 89 61 39 39 39 Fax No: ++49 89 613 59 01	 NETHERLANDS - Farnell Tel No: ++31 30 241 7373 Fax No: ++31 30 241 7333	 SWITZERLAND - Farnell Tel No: ++44 204 64 64 Fax No: ++44 204 64 54
 BRAZIL - Farnell-Newark Tel No: ++55 11 4066 9400 Fax No: ++55 11 4066 9410	 HONG KONG - Farnell-Newark Tel No: ++852 2268 9888 Fax No: ++852 2268 9899	 NEW ZEALAND - Farnell Tel No: 0800 90 80 80 Fax No: 0800 90 80 81	 UK - Farnell Tel No: ++44 8701 200 200 Fax No: ++44 8701 200 201
 CHINA - Farnell-Newark Tel No: ++86 10 6238 5152 Fax No: ++86 10 6238 5022	 HUNGARY - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 NORWAY - Farnell Tel No: 800 146 70 Fax No: 800 146 76	 UK - CPC ++44 8701 202 530 ++44 8701 202 531
 CZECH REPUBLIC - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 INDIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 PORTUGAL - Farnell Tel No: ++34 93 475 8804 Fax No: ++34 93 474 5288	 USA - Newark Tel No: 800 463 9275
 DENMARK - Farnell Tel No: ++45 44 53 66 44 Fax No: ++45 44 53 66 06	 IRELAND - Farnell Tel No: ++353 1 830 9277 Fax No: ++353 1 830 9016	 RUSSIA - Farnell Tel No: ++44 870 1200 208 Fax No: ++44 870 1200 209	 EXPORT - Farnell Tel No: ++44 8701 200 208 Fax No: ++44 8701 200 209 For enquiries from all other markets
 ESTONIA - Farnell Tel No: ++358 9 560 7780 Fax No: ++358 9 345 5411	 ISRAEL - Farnell Tel No: ++180 937 0015 Fax No: ++180 937 0014	 SINGAPORE - Farnell-Newark Tel No: ++65 6788 0200 Fax No: ++65 6788 0300	http://www.farnell.com http://www.newark.com http://www.cpc.co.uk

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. SPC Multicomp is the registered trademark of the Group. © Premier Farnell plc 2008.

