

High Precision (0.01 %/10 ppm/°C) Conformal Coating Sil Resistor



FEATURES

- Tight TCR to 5 ppm/°C
- Incorporates high stability thin film element (0.1 % at + 70 °C at Pn during 1000 h)
- Through hole (Sil)
- 100 Ω to 10 MΩ
- Tight tolerance down to 0.01 %
- Compliant to RoHS directive 2002/95/0EC



RoHS
COMPLIANT
GREEN
[5-2009]**

SCHEMATIC



TYPICAL PERFORMANCE

	ABS
TCR	5 ppm/°C
	ABS
TOL.	0.01 %


STANDARD ELECTRICAL SPECIFICATIONS			
TEST		SPECIFICATIONS	CONDITIONS
MATERIAL		PASSIVATED NICHROME	
Resistance range		100 Ω (minimum) to 10 MΩ (maximum)	
Absolute TCR	Standard ⁽¹⁾	± 10 ppm/°C	- 40 °C to + 125 °C
	On request	± 5 ppm/°C	0 °C to + 70 °C
Tolerance:	Absolute	± 0.01 % to ± 1 %	
Power rating		0.5 W	at + 70 °C
		0.3 W	at + 125 °C
Working voltage (maximum)		300 V	
Operating temperature range		- 55 °C to + 155 °C	

Note

⁽¹⁾ 15 ppm/°C for $R \geq 1.5M$

DIMENSIONS AND IMPRINTING

CNS 020

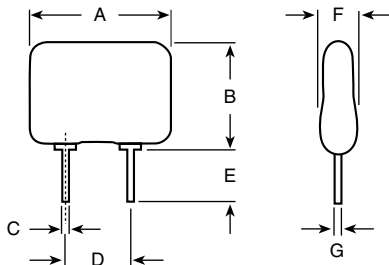

DIMENSION	INCHES	MILLIMETERS
A	0.318	8.10
B	0.260	6.62
C	0.020	0.51
D	0.200	5.08
E	0.120	3.17
F	0.100	2.54
G	0.010	0.25

In clear: Model, Vishay logo and manufacturing code

On back: Ohmic value (in Ω), tolerance (in %)

** Please see document "Vishay Material Category Policy": www.vishay.com/doc?99902



ENVIRONMENTAL TEST				
TEST	REQUIREMENTS			CONDITIONS
	NFC 83220 CECC40300	MIL-PRF 55182E	DRIFTS (max.)	
Overload	± 0.01 %	± 0.05 %	0.01 %	2.5 Un/5 s U _{max} < 2 Un
Temperature cycling	± 0.01 %	± 0.05 %	0.01 %	- 55 °C/+ 155 °C 5 cycles CEI 63-2-14 Test No
Terminal strength	± 0.01 %	± 0.02 %	0.01 %	CEI 68-2-21 Test Ua (pulling), Ub (bending), Uc (twisting)
Resistance to solder heat	± 0.01 %	± 0.02 %	0.01 %	+ 260 °C/10 s, CEI 68-2-20A Test T6 (Met 1A)
Vibration	± 0.01 %	± 0.02 %	0.01 %	10 Hz to 500 Hz 10 g, 6 h Met B4; CEI 68-2-6 Test Fc
Climatic sequence	± 0.05 % insulation resistance > 10 ² MΩ	-	0.05 %	- 55 °C/+ 155 °C 6 cycles 95 % RH RH 85 mbar CEI68-1
Moisture	± 0.05 % insulation resistance > 10 ² MΩ	-	0.02 %	56 days 95 % RH + 40 °C CEI 68-2-3
High temperature storage	± 0.05 %	-	0.05 %	1000 h/+ 155 °C CEI 68-2-20A; Test B

MECHANICAL SPECIFICATIONS	
Resistive material	Nichrome
Substrate material	Alumina
Terminals	Tin/silver on Cu alloy
Protection	Conformal epoxy coating

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CNS020-301KF (preferred part number format)

C	N	S	0	2	0	-	3	0	1	K	F
---	---	---	---	---	---	---	---	---	---	---	---

GLOBAL MODEL CNS 020	VALUE Decimal: R, K or M	TOLERANCE L = ± 0.01 % C = ± 0.25 % P = ± 0.02 % D = ± 0.5 % W = ± 0.05 % F = ± 1.0 % B = ± 0.1 %
-------------------------	-----------------------------	--

Historical Part Number example: CNS 020 301K 1 % (will continue to be accepted)

CNS 020	301K	1 %
HISTORICAL MODEL	VALUE	TOLERANCE



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.