

5

4








3

2

1

DRAWING NO.  
32-5998UL

REVISIONS	
A	RELEASE FOR QUOTATION 08-31-05
B	ADDED: NOTE 4 & 5, CONTACT 10-26-05

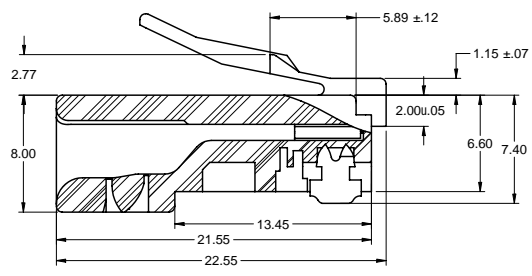

CONTACT

NOTES:

- ELECTRICAL SPECIFICATIONS**  
INSULATION RESISTANCE: 1000 MEGOHMS  
WITHSTAND VOLTAGE: 1000V, AC/ MINUTE
- MECHANICAL SPECIFICATIONS**  
CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS  
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100 MICRO-INCH NICKEL PLATING  
HOUSING MATERIAL: POLYCARBONATE  
DURABILITY: 1000 CYCLES MIN  
UL FLAMABILITY RATING: 94-V0
- ENVIRONMENTAL SPECIFICATIONS**  
TEMPERATURE RANGE: -40 TO +70
- FOR FLAT OVAL OR ROUND CABLE
- FOR SOLID OR STRANDED WIRE APPLICATIONS

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1994

**COMPANY CONFIDENTIAL**

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE
DECIMALS	BETTY.YU	10-26-05
X	CHECKED BY	DATE
+ 0.5	IVON.W	10-26-05
X.X	APPROVED BY	DATE
+ 0.15	THOMAS	10-26-05
X.XX	U/M	mm
+ 0.10		
ANGLES		
+ 0.51		

**EMERSON** Network Power  
**Connectivity Solutions**

TITLE  
RJ45 MOD PLUG 50"U,SOL/STR,FLAT

THIS DRAWING WAS PRODUCED BY COMPUTER. DO NOT SCALE DRAWING OR UPDATE MANUALLY.

SHEET 1 OF 1	DRAWING NO. 32-5998UL	SIZE C
-----------------	--------------------------	-----------

5

4

3

2

1