
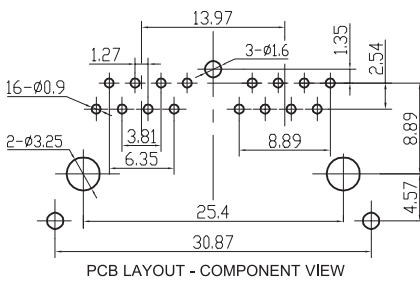


1 2 3 4 5

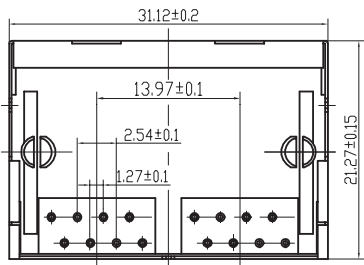

TECHNICAL CHARACTERISTICS



MATERIAL  
 INSULATOR MATERIAL: GLASS FILLED PBT  
 COLOUR: BLACK  
 CONTACT MATERIAL: COPPER ALLOY  
 CONTACT TYPE: STAMPED  
 CONTACT PLATING: SELECTIVE GOLD  
 SHIELDING: BRONZE NI PLATED  
 QUALITY CLASS: 500 MATING CYCLES

ENVIRONMENTAL  
 OPERATING TEMPERATURE: -25 °C UP TO 85 °C  
 FLAMMABILITY RATING UL94-V0  
 COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL  
 CURRENT RATING: 1.5 A  
 WORKING VOLTAGE: 120 VAC  
 INSULATION RESISTANCE: >500 MOHM  
 DIELECTRIC WITHSTANDING VOLTAGE: 1 000 VAC/MN  
 CONTACT RESISTANCE: 20 MOHM MAX

SOLDERING  
 WAVE PROCESS ONLY

PACKAGING  
 TRAY

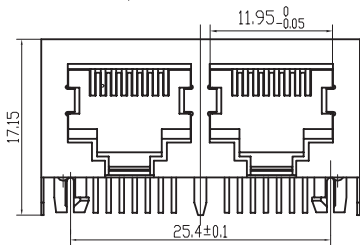

RoHS Compliant

G			
F			
E			
D			
C			
B			
A	21-NOV-07	PDF	CH
REV	DATE	FILE	BY

PROJECTION:	
APPROVAL:	RJ

GENERAL TOLERANCE	.X = +/- 0.2 .XX = +/- 0.15
UNIT:	MM
SCALE:	
SHEET:	1/1
DRAW:	

DESCRIPTION: RJ45 HORIZONTAL DUAL PORT SHIELDED TAB DOWN
WERI PART NO: 615016137621

SIZE	A4
------	----

A  
B  
C  
D