


# Bluetooth OEM Serial Port Adapter

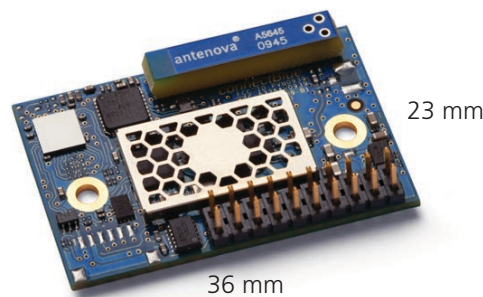

## Product Brief OBS433

The OEM SERIAL PORT ADAPTER™ 433 series is a long range Bluetooth module with support for the Serial Port Profile (SPP) for fast and secure transparent serial data transmissions, and the Personal Area Networking Profile (PAN) for transmission of Ethernet packages over Bluetooth. The very high receiver sensitivity and output power enables an extreme range of 1200 m. For highest throughput the module supports Bluetooth 2.1+EDR (Bluetooth 3.0 prepared via firmware upgrade). Since the Bluetooth stack is embedded in the module it does not require any driver or stack in your host so that you can be up and running in the shortest possible time. It is fully Bluetooth qualified and radio type approved for Europe, US and Canada, and has the connectBlue™ standard interface for compatibility over time and radio technologies.

### KEY FEATURES

- Embedded Bluetooth stack (SPP, DUN, PAN)
- Extreme range of 1200m
- Bluetooth 2.1+EDR qualified (3.0 prepared)
- High Speed UART Logic Level and RS232
- Very high throughput and low latency
- Easy configuration by AT commands
- Radio type approved for Europe, US and Canada (R&TTE, FCC, IC)\*
- Compliant with EMC, Safety and Medical standards\*
- Wireless Multidrop™ with up to 7 channels
- Extended Data Mode™ for individual control of up to 7 channels
- Repeater functionality
- Analog & digital I/Os over Bluetooth (special firmware)
- Internal or external antenna
- Industrial & Automotive temperature range

## BLUETOOTH SUPPORT

Bluetooth version 2.1+EDR (Qualified and Listed as Product)  
 Bluetooth version 3.0 prepared via firmware upgrade  
 Supported Bluetooth Profiles:  
   Generic Access Profile (GAP)  
   Serial Port Profile (SPP)  
   Dial-up networking Profile (DUN GW, DUN DT)  
   Personal Area Networking Profile (PAN) roles PANU & NAP  
   File Transfer Profile (FTP)\*  
   Object push Profile (OPP)\*  
 Output power: Class 1 +20 dBm (including antenna gain)  
 Receive sensitive level: -91 dBm  
 Range: 1200 m (approximate, line-of-sight)  
 Multipoint connections: Up to 7 active channels/slaves

## BLUETOOTH CHIPSET AND STACK

Radio: ST-Ericsson STLC2500DB  
 Microprocessor: ST STM32F103RC  
 Stack: connectBlue Embedded Bluetooth Stack

## SOFTWARE

All software embedded in the module (Bluetooth stack and application)  
 Configurable via AT commands (via Bluetooth or serial port)  
 connectBlue Low Emission Mode™ for not disrupting other 2.4GHz radios  
 Extended Data Mode™ for individually controlled multipoint data channels (different data can be sent to / received from each slave)  
 Repeater functionality for extended range

## HARDWARE INTERFACE

UART Logic-level or RS232  
 Supported baud rates: 1200 bit/s - 1.8 Mbit/s  
 Support for non-standard baud rates  
 Flow control: CTS/RTS (hardware) or none  
 12 digital IOs (firmware option)  
 4 A/D-converter channels (10-bit) (firmware option)

## CONNECTORS

Board-to-board connector  
 20-pin header connector (optional)  
 Solder land pads (optional)  
 JST 6-pin connector (optional)  
 U.fl. antenna connector (external antenna version only)

## POWER SUPPLY

3.3-6.0 VDC

## CURRENT CONSUMPTION

Power save mode (stop mode): TBD  
 Connected, not transmitting: TBD  
 Transmitting @115.2 kbps (average): TBD

## DIMENSIONS

Size: 23x36x4 mm  
 Weight: 5 g

*\* In progress, please contact us for details*

## TYPE APPROVALS\*

R&TTE (Europe)  
 FCC/CFR 47 part 15  
 IC (Industrie Canada)

## ENVIRONMENTAL\*

Operating temperature: -40°C to +85°C  
 Storage temperature: -40°C to +125°C  
 Humidity RH 5-90% non-condensing

## CERTIFICATIONS AND COMPLIANCE\*

**R&TTE Directive 1999/5/EC:**

**Effective use of frequency spectrum**  
 EN 300 328 V1.7.1 (2006-05)

## EMC

EN 301 489-1 V1.8.1 (2008-04)  
 EN 301 489-17 V1.3.2 (2008-04)  
 EN 61000-6-2 (2005)

## Health and safety

EN 50371:2002  
 EN 60950-1:2006 and/or IEC 60950-1:2005 (2nd Edition)

## Medical Electrical Equipment

IEC 60601-1-2 (2007)

## ARTICLE NUMBERS

### cB-OBS433i-02

OEM Serial Port Adapter 433 with internal antenna, board-to-board and 20-pin header connector.

### cB-OBS433x-02

OEM Serial Port Adapter 433 with u.fl. connector for external antenna, board-to-board and 20-pin header connector.

### cB-OBS433i-04

OEM Serial Port Adapter 433 with internal antenna, board-to-board connector and solder pads.

### cB-OBS433x-04

OEM Serial Port Adapter 433 with u.fl. connector for external antenna, board-to-board connector and solder pads.

### cB-OBS433i-06

OEM Serial Port Adapter 433 with internal antenna, JST wire connector, board-to-board connector and solder pads.

### cB-OBS433x-06

OEM Serial Port Adapter 433 with u.fl. connector for external antenna, JST wire connector, board-to-board connector and solder pads.

**connectBlue™**

*The strongest connection in a wireless world*

HEAD OFFICE: connectBlue AB | Norra Vallgatan 64 3V | SE-211 22 Malmö | Sweden | Phone +46 40-6307100 | Fax +46 40-237137  
 US OFFICE: connectBlue Inc. | 1460 N. Sandburg Terrace, Suite 2412 | Chicago, IL 60610 | USA | Phone +1 312 927 5859 | Fax +1 312 277 3209  
 GERMAN OFFICE: connectBlue GmbH | Raiffeisenstrasse 19 | DE-85276 Pfaffenhofen | Germany | Phone +49 8441 786 4160 | Fax +49 8441 786 4161  
 info@connectblue.com | us-info@connectblue.com | www.connectblue.com

Printed in Sweden. ©2010 connectBlue AB. All rights reserved. All specifications are subject to change without notice. The connectBlue word mark and logo are owned by connectBlue AB. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by connectBlue is under license.