


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASE AND CANCEL	1/31/03
	BXA-12579/KIT & BXA-12579/INV	

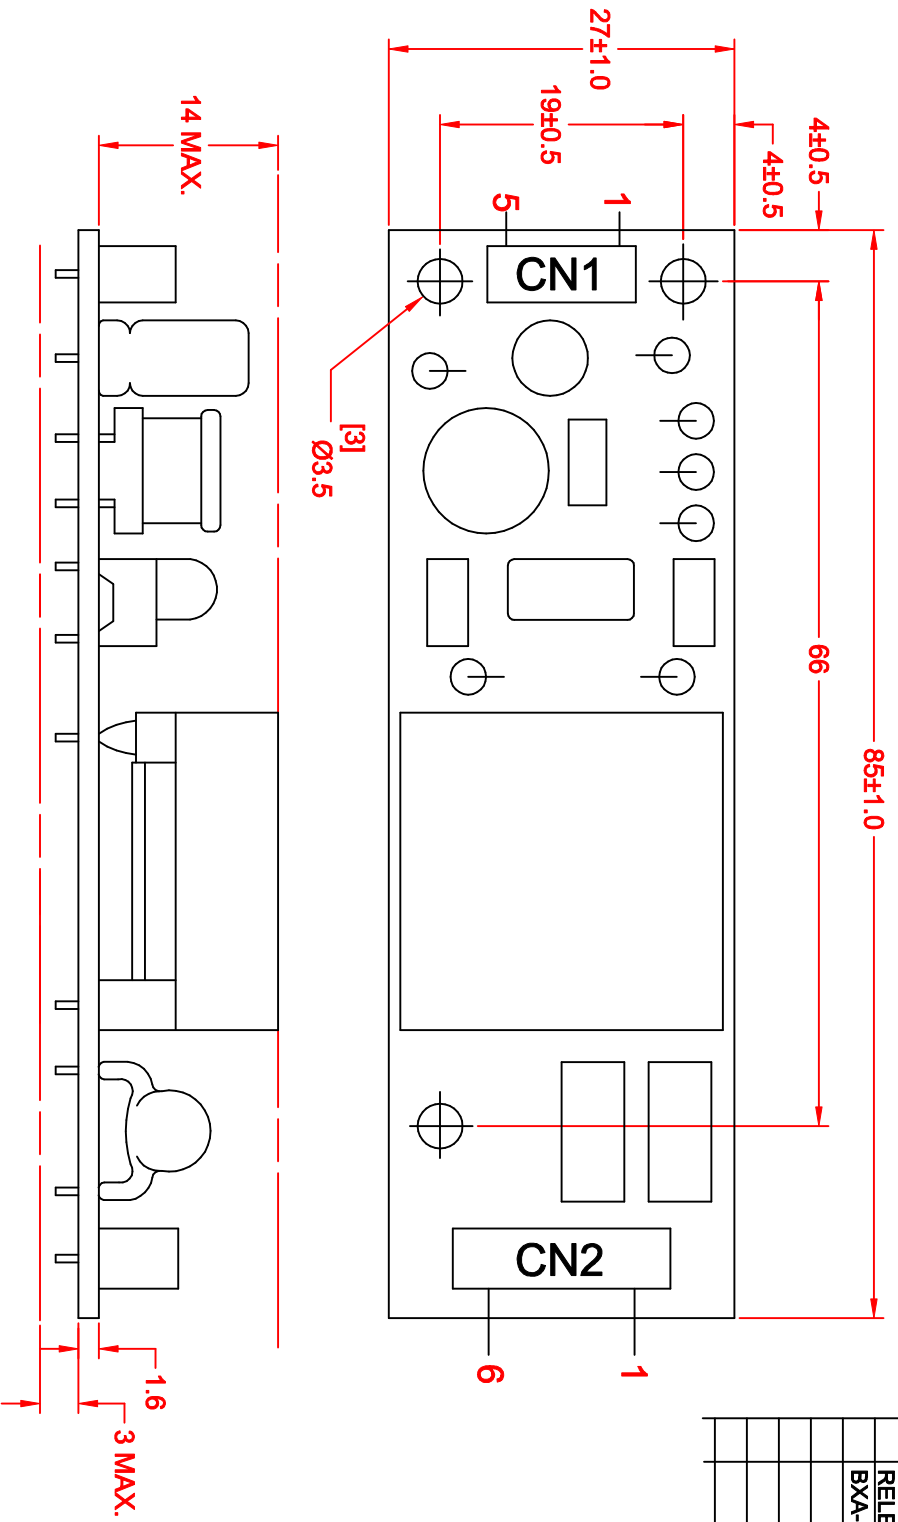

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
CN2	4	BXC-10569
	5	
	6	

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	560	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	5.5
OUTPUT FREQUENCY: (KHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED
 1 PL +/- 0.3
 2 PL +/- 0
 ANGLE +/- 0

THIRD ANGLE PROJECTION

JKL COMPONENTS CORPORATION

INVERTER WITH DIMMING OPTION

DRAWN BY	L. WENGSTROM	APP'D BY	F.D.	DATE	1/31/03
SCALE	A	SIZE	55335	FIG. NO.	BXA-12579
MANUAL REVISIONS NOT PERMITTED	- CAD DRAWING -	SCALE	NONE	RELEASED DATE	1/31/03
				REVISION DATE	
				REV. NO.	
				SHEET	OF

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10569 CAN BE ORDERED SEPARATELY.