


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	1/9/03

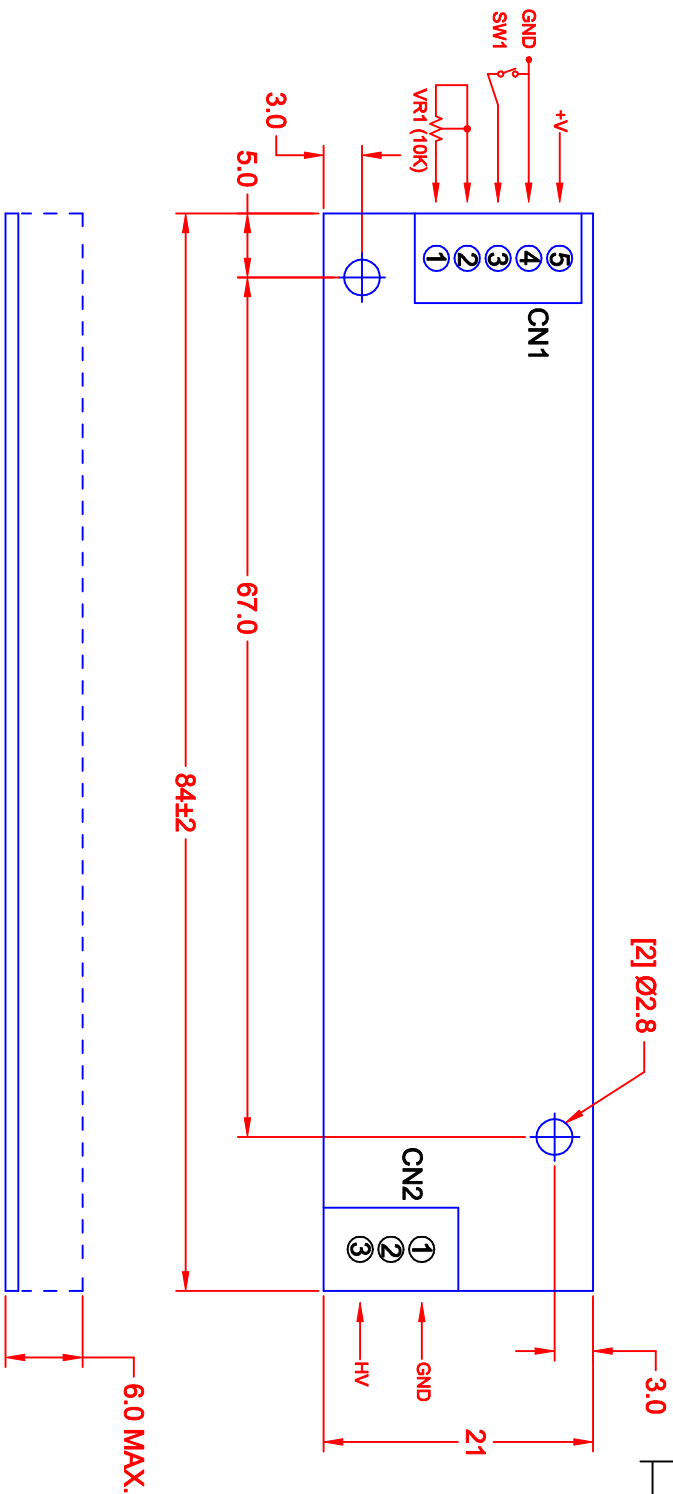

NO.	PIN NUMBER	MATING WIRE HARNESS
CN1	1	BXC-10546
	2	
	3	
	4	
	5	
CN2	1	BXC-10567
	2	
	3	

NOTE:
MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER.
JKL WIRE HARNESS BXC-10546 AND BXC-10567 CAN BE ORDERED SEPARATELY.

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	8.0	12.0	16.0
INPUT CURRENT: (mA)	190	210	230
OUTPUT VOLTAGE: (Vrms)	900	1000	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	5.5
OUTPUT FREQUENCY: (KHz)	27	37	47
DIMMING RANGE (OPTION)	40	---	100
OPERATING TEMP: (CELSIUS)	0	25	60

OPERATING SPECIFICATIONS

METRIC		DIMENSIONS ARE IN MILLIMETERS	
	THIRD ANGLE PROJECTION	TOLERANCE UNLESS OTHERWISE SPECIFIED	1 PL +/- 0.2 2 PL +/- 0
DRAWN BY	L. WENGSTROM	APP'D BY	DATE
SCALE	A	SIZE	FSCH NO.
MANUAL REVISIONS NOT PERMITTED	1/9/03	55335	DRAWING NO.
		BXA-12563	RELEASED DATE
			1/9/03
			REVISION DATE
			REV. NO.
			SHEET OF

JKL COMPONENTS CORPORATION

TITLE
DIMMING INVERTER