

6 DIGIT MICRO LCD COUNTER



Outline dimensions: 28x18x6.5mm




with bezel EA 021


FEATURES

- * LCD 6 DIGIT (MULTIPLEX)
- * 6mm DIGIT HEIGHT
- * POWER SUPPLY 2.4V TO 3.4V / TYP. 3μA
- * MAX. INPUT 10KHz
- * COUNTING AT FALLING EDGE, THRESHOLD 0.7V
- * RESET INPUT AT LOW, PULS WIDTH MIN. 15ms
- * PLEXICARBONAT CASE CLEAR IP40
- * OPERATING TEMPERATURE RANGE -10 TO +50 °C
- * STORAGE TEMPERATURE RANGE -20 TO +70 °C
- * CONNECTION: 5 PINS (2.54mm PITCH, 2.7mm LENGTH)
- * ACCESSORIE: SNAP-IN BEZEL **EA 021**, CUTOUT 29.4x22mm


DIMENSIONS

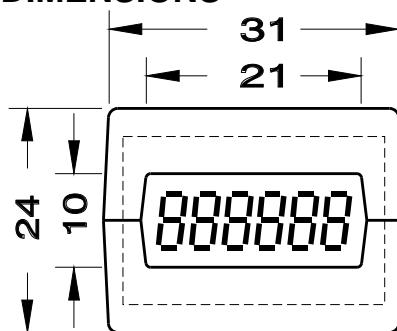

mit Rahmen EA 021

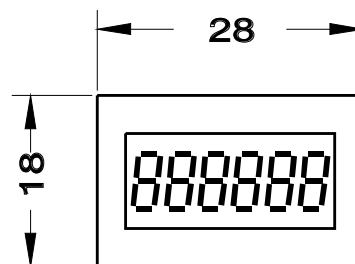

ohne Rahmen

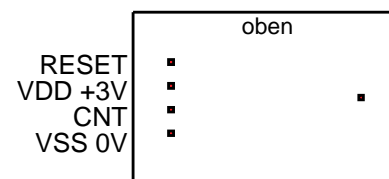

Ansicht von hinten

ORDERING INFORMATION

MICRO COUNTER, 6 DIGIT
SNAP-IN BEZEL, 2 PARTS

EA 2021-N
EA 021

ELECTRONIC
ASSEMBLY TECH

LOCHHAMER SCHLAG 17 · D-82 166 GRÄFELFING
FON +49-89-8541991 · FAX +49-89-8541721 · <http://www.lcd-module.de>

6 DIGIT UP/DOWN LCD COUNTER



Outline dimensions: 28x18x6.5mm




with bezel EA 021


FEATURES

- * LCD 6 DIGIT (MULTIPLEX)
- * 6mm DIGIT HEIGHT
- * POWER SUPPLY 2.4V TO 3.4V / TYP. 5 μ A
- * MAX. INPUT 10KHZ (MAX. 10 μ A)
- * COUNTING AT FALLING EDGE, THRESHOLD 0.7V
- * RESET INPUT AT LOW, PULS WIDTH MIN. 15ms
- * DIRECTION PIN HIGH: UP-COUNTING, LOW: DOWN COUNTING
- * PLEXICARBONAT CASE CLEAR IP40
- * OPERATING TEMPERATURE RANGE -10 TO +50 °C
- * STORAGE TEMPERATURE RANGE -20 TO +70 °C
- * CONNECTION: 5 PINS (2.54mm PITCH, 2.7mm LENGTH)
- * ACCESSORIE: SNAP-IN BEZEL **EA 021**, CUTOUT 29.4x22mm


DIMENSIONS

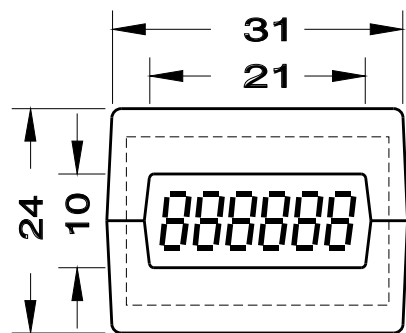

mit Rahmen EA 021

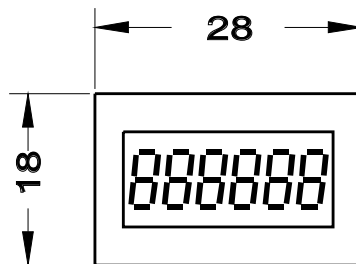

ohne Rahmen

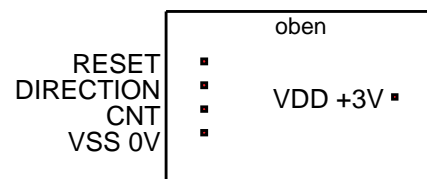

Ansicht von hinten

ORDERING INFORMATION

UP/DOWN COUNTER, 6 DIGIT, LCD
SNAP-IN BEZEL, 2 PARTS

EA 2022-N
EA 021