
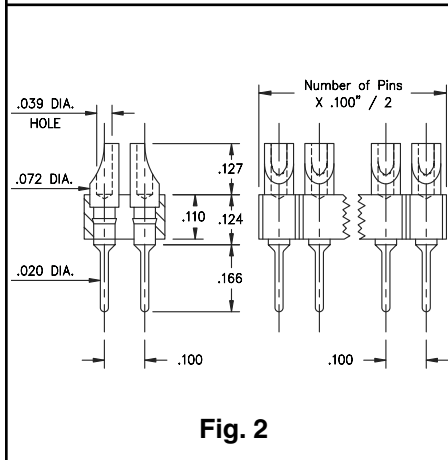


**Fig. 1**


- Series 380 & 480 use MM #8000 pins. See page 183 for details.
- Series 329 & 429 use MM #2954 pin receptacles and accept pin diameters from .015"-.025". See page 142 for details.
- Series 329 & 429 receptacles use Hi-Rel, 4 finger BeCu #30 contacts rated at 3 amps. See page 218 for details.
- Solder cups are pre-aligned.
- Insulators are high temp. thermoplastic.

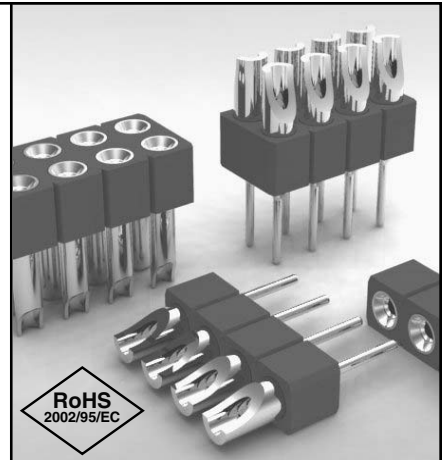

**Fig. 2**

### Ordering Information

<b>Fig. 1</b>	<b>Series 380...001</b>	<b>Solder Cup / Solder Tail</b>
	380-XX-1 _ _ -00-001000	Specify # of pins → 01-64
<b>Fig. 2</b>	<b>Series 480...001</b>	<b>Solder Cup / Solder Tail</b>
	480-10-2 _ _ -00-001000	Specify # of pins → 02-64

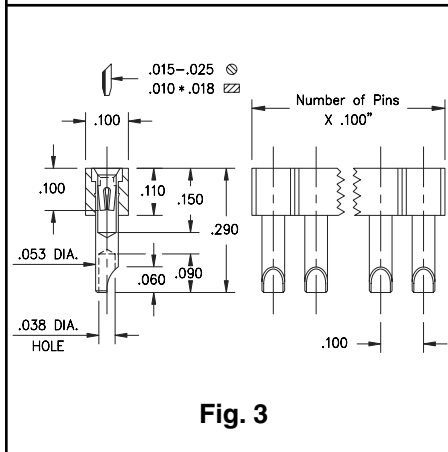


**Fig. 3**

*For Electrical, Mechanical & Environmental Data, See pg. 4*

**XX=Plating Code**  
See Below

*For RoHS compliance select ◇ plating code.*

SPECIFY PLATING CODE XX=	10 ◇	90 ◇	40 ◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	

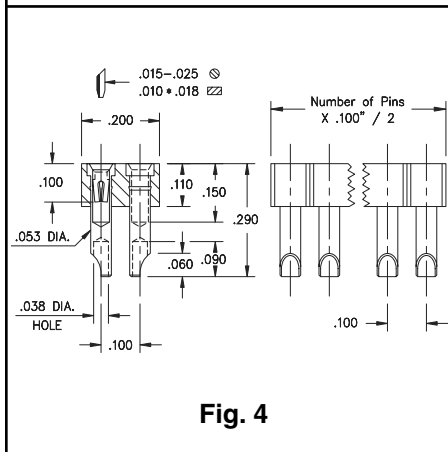

**Fig. 4**

<b>Fig. 3</b>	<b>Series 329...540</b>	<b>Solder Cup Sockets</b>
	329-43-1 _ _ -41-540000	Specify # of pins → 01-64
<b>Fig. 4</b>	<b>Series 429...540</b>	<b>Solder Cup Sockets</b>
	429-43-2 _ _ -41-540000	Specify # of pins → 02-64

*For Electrical, Mechanical & Environmental Data, See pg. 4*

*For RoHS compliance select ◇ plating code.*

PLATING CODE =					43 ◇		
Sleeve (Pin)					200μ" Sn		
Contact (Clip)					30μ" Au		