

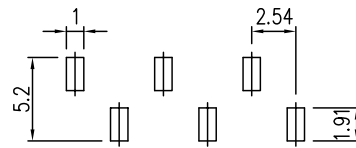
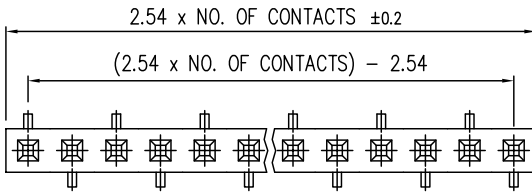


REV.	ECN NO.	DATE
1.0	RELEASED	05/25/01
2.0	REVISED P/N	03/04/04
3.0	UPDATE TOL.	12/16/04



P.C.B LAYOUT

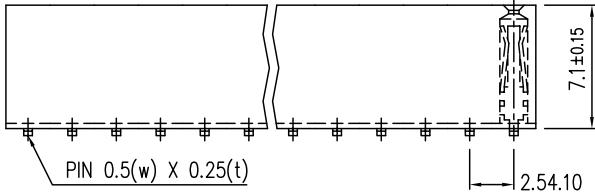

SPECIFICATIONS

CURRENT RATING : 3 AMPS  
 INSULATOR RESISTANCE : 5000 MEGOHMS MIN.  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING : AC 500V  
 MAX PROCESSING TEMP : 230°C FOR 30 ~ 60 SECONDS  
 (260°C FOR 10 SECONDS)

OPERATING TEMPERATURE : -40°C ~ +125°C  
 CONTACT MATERIAL : PHOSPHOR BRONZE.  
 INSULATOR MATERIAL : NYLON, UL 94V-0

\*CONTACT PLATING: P=OVERALL GOLD FLASH; T=OVERALL TIN

ORDERING INFORMATION:

1. Replace "\*" with plating code
2. Replace "xx" with number of positions (Pins)

SCALE	3:1	DRAW	JFW	Sullins Electronics San Marcos, CA Tel: 760 744-0125 www.SullinsElectronics.com	
UNIT	MM	CHECK	AJT	NAME: FEMALE HEADER, 2.54mm SPACING 7.1mm PROFILE, SMT	
TOLERANCE		AP"E		(PART NO)	PP_Cxx1KFXC
.0 $\pm 0.35$ .00 $\pm 0.2$ ANG $\pm 5^\circ$		PROJECTION		(DRAW NO)	7012