
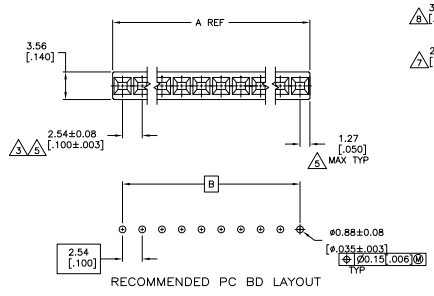


REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01	11/10/10	REVISED PER ECO-10-01294	K3		



- △ HOUSING: FLAME RETARDANT, GLASS FILLED, POLYESTER, COLOR: BLACK.
CONTACT: PHOSPHOR BRONZE
- △ CONTACT: DUPLEX PLATED 0.25µm[0.00010] MIN GOLD IN CONTACT AREA, 3.81-7.62µm[0.000150-0.000300] BRIGHT TIN-LEAD ON LEADS ALL OVER 1.27µm[0.000050] MIN NICKEL.
- △ THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- △ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ TOLERANCE IS NON-CUMULATIVE.
- △ 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE LOGO.
- △ POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- △ POINT-OF-CONTACT DIMENSION.
- △ NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- △ TE LOGO AND CSA LOGO ARE MOLDED INTO HOUSING.
- △ CONTACT: DUPLEX PLATED 0.25µm[0.00010] MIN GOLD IN CONTACT AREA, 3.81-7.62µm[0.000150-0.000300] MATTE TIN ON LEADS ALL OVER 1.27µm[0.000050] MIN NICKEL.
- △ ROHS 2002/95/EC COMPLIANT
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2.54	[1.00]	5.08	[2.00]	2	△△	8-146386-9
99.06	[3.900]	101.60	[4.000]	40	△△	8-146386-8
96.52	[3.800]	99.06	[3.900]	39	△△	8-146386-7
93.98	[3.700]	96.52	[3.800]	38	△△	8-146386-6
91.44	[3.600]	93.98	[3.700]	37	△△	8-146386-5
88.90	[3.500]	91.44	[3.600]	36	△△	8-146386-4
86.36	[3.400]	88.90	[3.500]	35	△△	8-146386-3
83.82	[3.300]	86.36	[3.400]	34	△△	8-146386-2
81.28	[3.200]	83.82	[3.300]	33	△△	8-146386-1
78.74	[3.100]	81.28	[3.200]	32	△△	8-146386-0
76.20	[3.000]	78.74	[3.100]	31	△△	7-146386-9
73.66	[2.900]	76.20	[3.000]	30	△△	7-146386-8
71.12	[2.800]	73.66	[2.900]	29	△△	7-146386-7
68.58	[2.700]	71.12	[2.800]	28	△△	7-146386-6
66.04	[2.600]	68.58	[2.700]	27	△△	7-146386-5
63.50	[2.500]	66.04	[2.600]	26	△△	7-146386-4
60.96	[2.400]	63.50	[2.500]	25	△△	7-146386-3
58.42	[2.300]	60.96	[2.400]	24	△△	7-146386-2
55.88	[2.200]	58.42	[2.300]	23	△△	7-146386-1
53.34	[2.100]	55.88	[2.200]	22	△△	7-146386-0
50.80	[2.000]	53.34	[2.100]	21	△△	6-146386-9
48.26	[1.900]	50.80	[2.000]	20	△△	6-146386-8
45.72	[1.800]	48.26	[1.900]	19	△△	6-146386-7
43.18	[1.700]	45.72	[1.800]	18	△△	6-146386-6
40.64	[1.600]	43.18	[1.700]	17	△△	6-146386-5
38.10	[1.500]	40.64	[1.600]	16	△△	6-146386-4
35.56	[1.400]	38.10	[1.500]	15	△△	6-146386-3
33.02	[1.300]	35.56	[1.400]	14	△△	6-146386-2
30.48	[1.200]	33.02	[1.300]	13	△△	6-146386-1
27.94	[1.100]	30.48	[1.200]	12	△△	6-146386-0
25.40	[1.000]	27.94	[1.100]	11	△△	5-146386-9
22.86	[0.900]	25.40	[1.000]	10	△△	5-146386-8
20.32	[0.800]	22.86	[0.900]	9	△△	5-146386-7
17.78	[0.700]	20.32	[0.800]	8	△△	5-146386-6
15.24	[0.600]	17.78	[0.700]	7	△△	5-146386-5
12.70	[0.500]	15.24	[0.600]	6	△△	5-146386-4
10.16	[0.400]	12.70	[0.500]	5	△△	5-146386-3
7.62	[0.300]	10.16	[0.400]	4	△△	5-146386-2
5.08	[0.200]	7.62	[0.300]	3	△△	5-146386-1

2.54	[1.00]	5.08	[2.00]	2	△△	3-146386-9
99.06	[3.900]	101.60	[4.000]	40	△△	3-146386-8
96.52	[3.800]	99.06	[3.900]	39	△△	3-146386-7
93.98	[3.700]	96.52	[3.800]	38	△△	3-146386-6
91.44	[3.600]	93.98	[3.700]	37	△△	3-146386-5
88.90	[3.500]	91.44	[3.600]	36	△△	3-146386-4
86.36	[3.400]	88.90	[3.500]	35	△△	3-146386-3
83.82	[3.300]	86.36	[3.400]	34	△△	3-146386-2
81.28	[3.200]	83.82	[3.300]	33	△△	3-146386-1
78.74	[3.100]	81.28	[3.200]	32	△△	3-146386-0
76.20	[3.000]	78.74	[3.100]	31	△△	2-146386-9
73.66	[2.900]	76.20	[3.000]	30	△△	2-146386-8
71.12	[2.800]	73.66	[2.900]	29	△△	2-146386-7
68.58	[2.700]	71.12	[2.800]	28	△△	2-146386-6
66.04	[2.600]	68.58	[2.700]	27	△△	2-146386-5
63.50	[2.500]	66.04	[2.600]	26	△△	2-146386-4
60.96	[2.400]	63.50	[2.500]	25	△△	2-146386-3
58.42	[2.300]	60.96	[2.400]	24	△△	2-146386-2
55.88	[2.200]	58.42	[2.300]	23	△△	2-146386-1
53.34	[2.100]	55.88	[2.200]	22	△△	2-146386-0
50.80	[2.000]	53.34	[2.100]	21	△△	1-146386-9
48.26	[1.900]	50.80	[2.000]	20	△△	1-146386-8
45.72	[1.800]	48.26	[1.900]	19	△△	1-146386-7
43.18	[1.700]	45.72	[1.800]	18	△△	1-146386-6
40.64	[1.600]	43.18	[1.700]	17	△△	1-146386-5
38.10	[1.500]	40.64	[1.600]	16	△△	1-146386-4
35.56	[1.400]	38.10	[1.500]	15	△△	1-146386-3
33.02	[1.300]	35.56	[1.400]	14	△△	1-146386-2
30.48	[1.200]	33.02	[1.300]	13	△△	1-146386-1
27.94	[1.100]	30.48	[1.200]	12	△△	1-146386-0
25.40	[1.000]	27.94	[1.100]	11	△△	1-146386-0
22.86	[0.900]	25.40	[1.000]	10	△△	1-146386-0
20.32	[0.800]	22.86	[0.900]	9	△△	1-146386-0
17.78	[0.700]	20.32	[0.800]	8	△△	1-146386-0
15.24	[0.600]	17.78	[0.700]	7	△△	1-146386-0
12.70	[0.500]	15.24	[0.600]	6	△△	1-146386-0
10.16	[0.400]	12.70	[0.500]	5	△△	1-146386-0
7.62	[0.300]	10.16	[0.400]	4	△△	1-146386-0
5.08	[0.200]	7.62	[0.300]	3	△△	1-146386-0

FINISH	B	A	NO OF POSN	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				
DESIGNER	DATE	REVISED	BY	APP
108-25022	11-25-018			
114-25018				
SEE TABLE				
CUSTOMER DRAWING		A100779		146386