
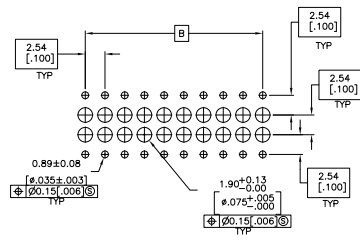



THIS DRAWING IS UNAPPROVED
 UNLESS OTHERWISE SPECIFIED BY THIS ELECTRONICS CORPORATION ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
K1	00	REVISED PER ECO-08-019092	DMAN08	HMR	JO
K2	00	REVISED PER ECO-09-020832	03SEP09	KK	AEG

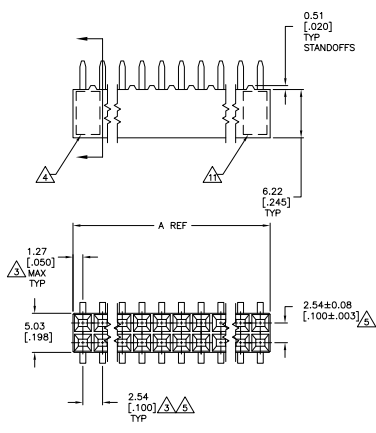

SUPERSEDED BY 6-147100-6

FINISH	B	A	NO OF POSN	PART NUMBER
OBSELETE	4.3, 1.8 [1.700]	4.5, 7.2 [1.800]	36	147100-1
OBSELETE	2.54 [100]	5.08 [200]	4	147100-0
OBSELETE	-	2.54 [100]	2	147100-9
OBSELETE	99.06 [3.900]	101.60 [4.000]	80	147100-8
OBSELETE	96.52 [3.800]	99.06 [3.900]	78	147100-7
OBSELETE	93.98 [3.700]	96.52 [3.800]	76	147100-6
OBSELETE	91.44 [3.600]	93.98 [3.700]	74	147100-5
OBSELETE	88.90 [3.500]	91.44 [3.600]	72	147100-4
OBSELETE	86.36 [3.400]	88.90 [3.500]	70	147100-3
OBSELETE	83.82 [3.300]	86.36 [3.400]	68	147100-2
OBSELETE	81.28 [3.200]	83.82 [3.300]	66	147100-1
OBSELETE	78.74 [3.100]	81.28 [3.200]	64	147100-0
OBSELETE	76.20 [3.000]	78.74 [3.100]	62	147100-9
OBSELETE	73.66 [2.900]	76.20 [3.000]	60	147100-8
OBSELETE	71.12 [2.800]	73.66 [2.900]	58	147100-7
OBSELETE	68.58 [2.700]	71.12 [2.800]	56	147100-6
OBSELETE	66.04 [2.600]	68.58 [2.700]	54	147100-5
OBSELETE	63.50 [2.500]	66.04 [2.600]	52	147100-4
OBSELETE	60.96 [2.400]	63.50 [2.500]	50	147100-3
OBSELETE	58.42 [2.300]	60.96 [2.400]	48	147100-2
OBSELETE	55.88 [2.200]	58.42 [2.300]	46	147100-1
OBSELETE	53.34 [2.100]	55.88 [2.200]	44	147100-0
OBSELETE	50.80 [2.000]	53.34 [2.100]	42	147100-9
OBSELETE	48.26 [1.900]	50.80 [2.000]	40	147100-8
OBSELETE	45.72 [1.800]	48.26 [1.900]	38	147100-7
OBSELETE	43.18 [1.700]	45.72 [1.800]	36	147100-6
OBSELETE	40.64 [1.600]	43.18 [1.700]	34	147100-5
OBSELETE	38.10 [1.500]	40.64 [1.600]	32	147100-4
OBSELETE	35.56 [1.400]	38.10 [1.500]	30	147100-3
OBSELETE	33.02 [1.300]	35.56 [1.400]	28	147100-2
OBSELETE	30.48 [1.200]	33.02 [1.300]	26	147100-1
OBSELETE	27.94 [1.100]	30.48 [1.200]	24	147100-0
OBSELETE	25.40 [1.000]	27.94 [1.100]	22	147100-9
OBSELETE	22.86 [0.900]	25.40 [1.000]	20	147100-8
OBSELETE	20.32 [0.800]	22.86 [0.900]	18	147100-7
OBSELETE	17.78 [0.700]	20.32 [0.800]	16	147100-6
OBSELETE	15.24 [0.600]	17.78 [0.700]	14	147100-5
OBSELETE	12.70 [0.500]	15.24 [0.600]	12	147100-4
OBSELETE	10.16 [0.400]	12.70 [0.500]	10	147100-3
OBSELETE	7.62 [0.300]	10.16 [0.400]	8	147100-2
OBSELETE	5.08 [0.200]	7.62 [0.300]	6	147100-1

- △ HOUSING: FLAME RETARDANT, GLASS FILLED, THERMOPLASTIC, COLOR: BLACK. CONTACT: PHOSPHOR BRONZE
- △ CONTACT: 2.54-5.08µm[0.000100-0.00200] TIN-LEAD OVER 1.27µm[0.00050] NICKEL
- △ THESE DIMENSIONS PERTAIN TO CAVITY CENTERLINES ONLY - NOT TO CONTACT LOCATIONS
- △ PART NUMBER AND DATE CODE ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ TOLERANCE IS NON-CUMULATIVE.
- △ 2 POSITION DATE CODE IS MARKED OPPOSITE SIDE OF TE LOGO.
- △ POINT-OF-MEASUREMENT DIMENSION FOR PLATING THICKNESS (INSIDE CONTACT BEAM).
- △ POINT-OF-CONTACT DIMENSION.
- △ CONTACT: 3.81-7.62µm[0.00150-0.00300] TIN OVER 1.27µm[0.00050] NICKEL.
- △ ROHS 2002/95/EC COMPLIANT PART.
- △ TE TRADEMARK AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.
- △ NO PART NUMBER MARKING REQUIRED FOR THIS PART.
- △ OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

FINISH: B, A

NO OF POSN: 36, 4, 2, 80, 78, 76, 74, 72, 70, 68, 66, 64, 62, 60, 58, 56, 54, 52, 50, 48, 46, 44, 42, 40, 38, 36, 34, 32, 30, 28, 26, 24, 22, 20, 18, 16, 14, 12, 10, 8, 6

PART NUMBER: 147100-1 through 147100-9

THIS DRAWING IS A CONTROLLED DOCUMENT. THE NUMBER OF COPIES OF THIS DRAWING IS LIMITED TO ONE PER WORK ORDER. ANY OTHER COPIES ARE UNCONTROLLED.

RECEIPTABLE ASSEMBLY, MOD N, DOUBLE ROW, DUAL ENTRY, 1000.100CL, VERTICAL MOUNT, AMPRODU

114-25018

100779

147100

4.1