

4


3




2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
CM	52				
	D1	REVISED PER ECO-11-004917	11MAR11	RK	HMR


- MATES WITH HOUSING 640518.
-  UL LOGO AND CSA LOGO TO APPEAR ON EITHER LATCH SURFACE PER AMP SPEC 202-20, I.D. NO. 1-18838-3 AND 1-18839-3. FROST BACKGROUND OPTIONAL.
- DIMENSIONS IN BRACKETS ARE IN INCHES.

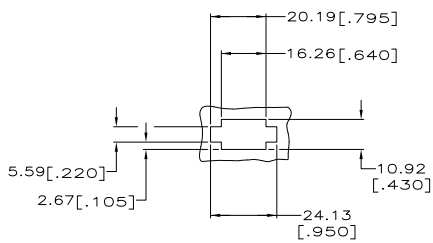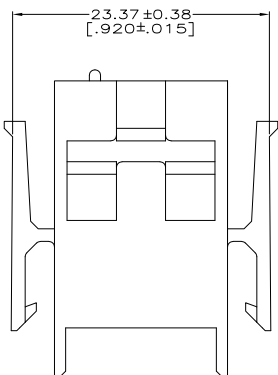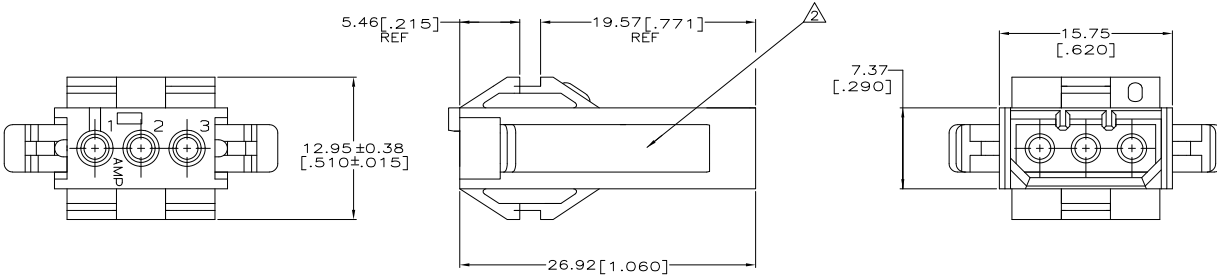

RECOMMENDED CUT OUT
 FOR 1.73[.068] MAX THICK PANEL
 SCALE 1:1



1-640508-0
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR	R. VESTAL	7-12-98	 TE Connectivity HOUSING, CAP MRLI 3 POSITION	RESTRICTED TO
DIMENSIONS: mm [INCHES]		CHK		7-12-98		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD	A. BRIDGICK	7-12-98		
0 PLG ± .010		NAME				
1 PLG ± .010		APPLICATION SPEC			SIZE	A2
2 PLG ± 0.15[.005]		WEIGHT			CAGE CODE	00779
3 PLG ± .010		FINISH			DRAWING NO	640508
4 PLG ± .010					CUSTOMER DRAWING	
ANGLES ± 0.30°					SCALE	4:1
MATERIAL: NYLON, UL 94V-0, NATURAL (BRICK RED)					SHEET	1 of 1
					REV	D1

1471-9 (3/11)

640508

A