

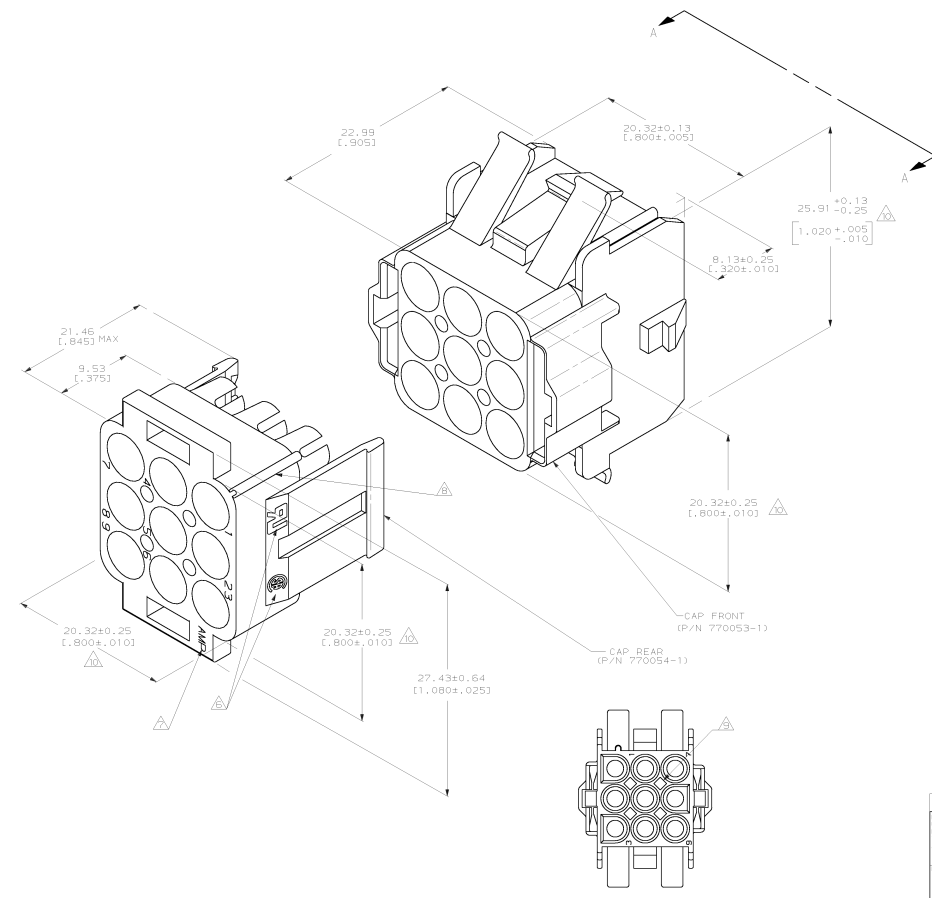


DRAWING MADE IN THIRD ANGLE PROJECTION  
 THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

REVOLUTIONS		DATE	APPROV.
CM	53	J	REV PER EC 063B-0114-02



- BULK PACKAGED, UNASSEMBLED.
- RECOMMENDED PANEL THICKNESS 0.76-2.29 (0.030-0.090).
- PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- OPTIONAL FOR KEYING HOUSING IN PANEL.
- CIRCUIT NO. 1 LOCATOR.
- APPROVAL AGENCY LOGO LOCATED APPROXIMATELY AS SHOWN.
- AMP LOGO LOCATED THIS SURFACE.
- CIRCUIT NUMBER ONE IDENTIFICATION RIB AND CIRCUIT IDENTIFICATION NUMBERS ARE EACH LOCATED ADJACENT TO THE APPROPRIATE CIRCUIT CAVITIES.
- OPTIONAL CONSTRUCTION PROVIDES ROUND MATERIAL REDUCTION CORING HOLES.
- DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.

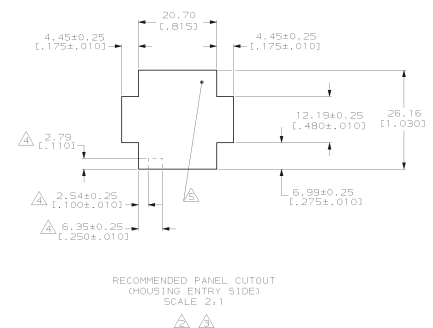

**METRIC**

PART NUMBER		PART NO.	
770028-1		770028-1	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES PRECEDENCE TO MILLIMETERS		DR 1-22-92 K. SAKSON	
3 P.L.C. DEC # 0-13 1-0993		CHR 1-22-92 S. SANE	
NYLON, UL94V-0, M. TRUL		APPR 1-22-92 M. TRUL	
FINISH _____		APPR 1-22-92 M. TRUL	
APPLICATION SPEC _____		MATERIAL SPEC _____	
WEIGHT _____		FINISH NO. 00779	
SCALE 5:1		DRAWING NO. 770028	
		SHEET 1 OF 1	

CUSTOMER DRAWING

19-198-02 10.11.05 and 19538 / hose/arc/15538/98194