
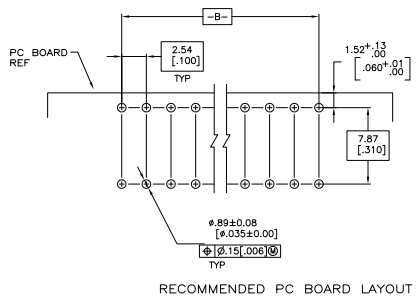

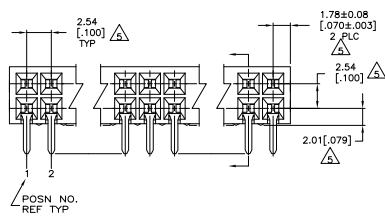


REV	DATE	DESCRIPTION	BY	CHK	APP
AD 00					
G	EC 003C 0008 05		03MMP05	BSV	JRO
G1	REVISED PER ECO-09-021826		148EP09	KK	AEG

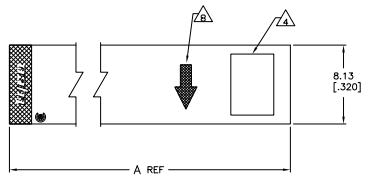

- △ HOUSING MATERIAL: GLASS-FILLED, FLAME-RETARDANT, POLYESTER.
- △ CONTACT MATERIAL : PHOSPHOR BRONZE.
- △ CONTACT FINISH: DUPLEX PLATED .000030 GOLD ON CONTACT AREA, .000150-.000300 BRIGHT TIN-LEAD ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL
- △ DATE CODE AND PART NUMBER ARE MARKED IN APPROXIMATE LOCATION SHOWN.
- △ DIMENSIONS PERTAIN TO CAVITY CENTERLINES.
- △ POINT OF MEASUREMENT FOR PLATING THICKNESS OF CONTACT AREA.
- 7. CONTACTS SHALL MEET AN AVERAGE INSERTION FORCE OF 2.75 OUNCES OR LESS AND MIN WITHDRAWAL FORCE OF 0.5 OUNCES.
- △ MOLDED IN ARROW DESIGNATES THE MATING FACE OF THE CONNECTOR.
- △ CONTACT FINISH: DUPLEX PLATED .000030 GOLD ON CONTACT AREA, .000150-.000300 MATTE TIN ON SOLDER LEADS, ALL OVER .000050 MINIMUM NICKEL
- △ ROHS 2002/95/EC COMPLIANT
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

11	OBsolete	63.50 [2.500]	67.06 [2.640]	52	6-535593-1
		63.50 [2.500]	67.06 [2.640]	52	535593-1
	FINISH	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. **TYS Electronics Corporation**
 Harrisburg, Pa 17105-3608

DESIGNED BY	DATE	REVISED BY	DATE
DRAWN BY		CHECKED BY	
APPROVED BY		DATE	

REPT. ASSY. MOD #, HORIZ., 100 CL DOUBLE ROW
 CLOSED ENTRY, LOW-FORCE SHORT POINT OF CONTACT, HIGH TEMPERATURE, HIGH STANDOFFS.

SIZE: A1 00779 535593

CUSTOMER DRAWING