
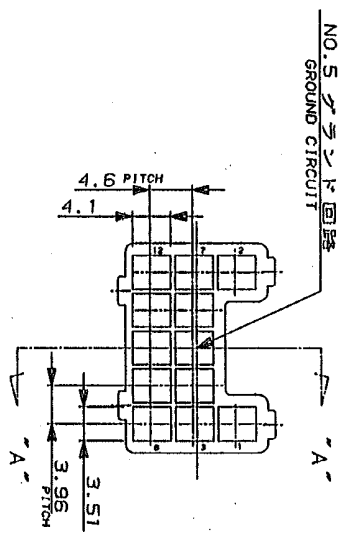



4 3 2 1

PK -1 AS SHOWN  
本図




注記;

- 1 適用規格 : 108-5315
- 製品規格 : 114-5147
- 取付適用規格 : 15-507J
- 2 取扱説明書 : 66710V, 94V-0, プレ-
- △材料及び色

NOTES,

- 1 APPLICABLE SPECIFICATIONS
- PRODUCT SPEC. : 108-5315
- APPLICATION SPEC. : 114-5147
- 2 INSTRUCTION SHEET : 15-507J
- △ MATERIAL COLOR : 66NYLON 94V-0, GRAY



LTR		0		RELEASED	REV. 10/78	DR	CHK	DATE	DR	CHK	DATE
MATERIAL		3		DR. T. FUJITA		S. MATSUDA		S. MATSUDA		S. MATSUDA	
WIRE RANGE		AMP CAVG - 3		INSULATION DIA		AMP		AMP		AMP	
FINISH		---		---		---		---		---	
NAME		AMP		AMP		AMP		AMP		AMP	
GENERAL TOLERANCE		0.05		0.1		0.2		0.3		0.5	
SIZE		A3		J		C-176762		C-176762		C-176762	
SCALE		2-1		REV. 0		SHEET 1		OF 1		OF 1	

CUSTOMER DRAWING

AMP AMP (JAPAN) LTD. Tokyo, Japan