

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	OWN	APPD
CM	0				
	N2	REVISED PER ECO-11-005027	11MAR11	RK	HMR

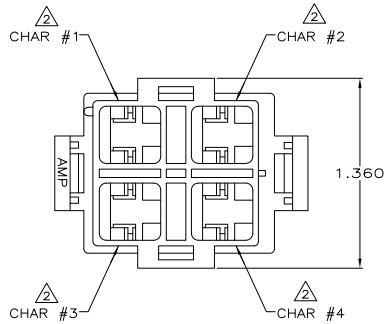

- 1. ACCEPTS TERMINALS 350650 AND 350651.
- 2. CHARACTERS 3 AND 4 MARKED ON NEAR SURFACE AS SHOWN, CHARACTERS 1 AND 2 MARKED ON OPPOSITE SIDE.
- 3. NYLON, 94V-0 RATED, BRICK RED.
- 4. NYLON, 94V-2 RATED, BLACK.
- 5. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5 OBSOLETE	2	3	643267-3
	2	3	643267-1
	2	3	CIRCUIT IDENTIFICATION
	2	3	MAT'L
	2	3	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	R. SHIBBY	09/15/91	 TE Connectivity	
DIMENSIONS:		CHK	R. STONE	5-22-91		
mm		APPD	R. WALTER	5-22-91		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	CAP, HIGH CURRENT, 4 CIRCUIT			
0 PLG	±	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLG	±	PRODUCT SPEC	A2	00779	C=643267	
2 PLG	±	WEIGHT	CUSTOMER DRAWING			
3 PLG	± 015		SCALE 2:1 SHEET 1 of 1 REV N2			
4 PLG	±					
ANGLES	±					
FINISH						
MATERIAL	SEE TABLE					