

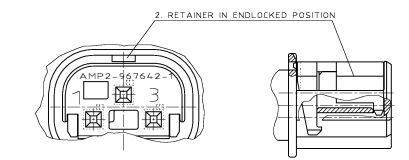


CONDITION ON DELIVERY

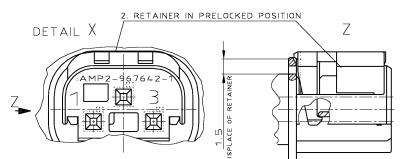

- SUITABLE FOR SOCKET CONTACT FOR SINGLE WIRE SEALING : SEE TABLE-1
  - SHROUDED CONNECTION DRAWING : 114-18063-13
  - SUITABLE FOR WIRE SIZE RANGE : 0.2~0.75mm<sup>2</sup>
  - PRODUCT SPECIFICATION 108-18272
  - INSTRUCTION SHEET NO. 114-18061
- ▲ WARPAGE ±0.5 PERMITTED



AMP PART NO	CODING	ITEM	PART NAME	AMP PART NO	MATERIAL	COLOR	QUANTITY
1376235-2	B	①	PROTECTIVE COVER 3 POS.	1376234-1	PBT-GF10	BLACK	1
		②	SEALING	967080-1	SILICON RUBBER	NATURAL	1
		③	RETAINER	968401-1	PBT-GF15	GREEN	1
1376235-1	A	①	SOCKET HSG. POS.	2-968403-1	PBT-GF15	GRAY	1
		②	PROTECTIVE COVER 3 POS.	1376234-1	PBT-GF10	BLACK	1
		③	SEALING	967080-1	SILICON RUBBER	NATURAL	1
		④	RETAINER	968401-1	PBT-GF15	GREEN	1
		⑤	SOCKET HSG. 3 POS.	1-968403-1	PBT-GF15	BLACK	1

TABLE-1

FINISH	APPLICABLE RECEPTACLE AMP P/N	APPLICABLE WIRE RANGE (mm <sup>2</sup> )	SINGLE WIRE SEALING
Sn	962885-1	0.2	967067-2
Au	962885-5	0.35	
Sn	965906-1	0.5	967067-1
Au	965906-5	0.75	

THIS DRAWING IS A CONTROLLED DOCUMENT.

REV. 1  
 DATE 03/08/2011  
 BY 60354/ML/STP

AMP  
 Tyco Electronics AMP K&L  
 Worcester, MA  
 MOS SOCKET HOUSING  
 3POS ASSY

114-180272  
 114-18025  
 3.8 g

SEE TABLE

CUSTOMER DRAWING  
 A100778  
 1376235