

10 9 8 7 6 5 4 3 2 1

F

E

D

C

B

A

F



E

D

C

B

A

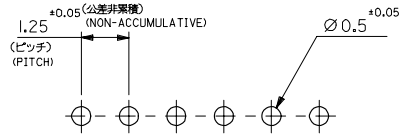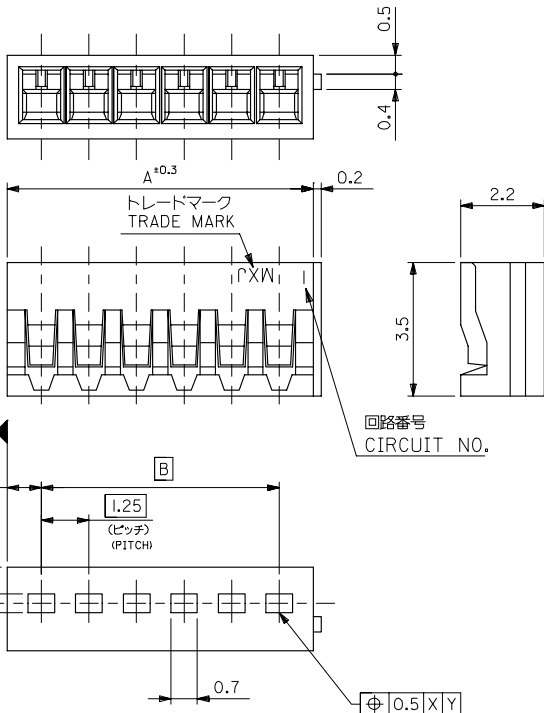


基板取付穴推奨寸法 (t=0.8)
RECOMMENDED P.C. BOARD HOLE DIM. (t=0.8)

適合ターミナル
APPLICABLE TERMINAL

注記
NOTE

- △ 適合ターミナル : 50061-8*00
50080-8*00
- △ APPLICABLE TERMINAL : 50061-8*00
50080-8*00



17.5	19.3	51022-1500	15
16.25	18.05	-1400	14
15	16.8	-1300	13
13.75	15.55	-1200	12
12.5	14.3	-1100	11
11.25	13.05	-1000	10
10	11.8	-0900	9
8.75	10.55	-0800	8
7.5	9.3	-0700	7
6.25	8.05	-0600	6
5	6.8	-0500	5
3.75	5.55	-0400	4
2.5	4.3	-0300	3
1.25	3.05	51022-0200	2
B	A	ENG. NO.	種 CKT. NO.

材料 MATERIAL	ポリエステル, UL94V-0 POLYESTER, UL94V-0
仕上り FINISH	—
適用導線範囲 WIRE RANGE	—
標準外径 INS. RANGE	—

REVISED	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE (MM ONLY)	SCALE (10:1)	DESIGN UNITS (METRIC)	THIRD ANGLE PROJECTION
EC NO. J2006-2413	2006/04/05	10 UNDER ±0.2	DRAWN BY H. IJIMA	DATE 1996/05/29	TITLE 1.25 BOARD IN CONN HSG	
DRWN: YAOYAGI	2006/04/06	10 OVER 30 UNDER ±0.25	CHECKED BY M. FUKUSHIMA	DATE 1996/05/29		
CHKD: MIYAKA		30 OVER ±0.3	APPROVED BY M. ENOMOTO	DATE 1996/05/29		
APPR: NUKITA	2006/04/12	ANGULAR ±3 °	MATERIAL NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART			
			SIZE A3		MOLEX INCORPORATED	
					DOCUMENT NO. SD-51022-001	SHEET NO. 1 OF 1