
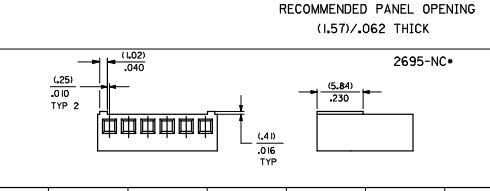
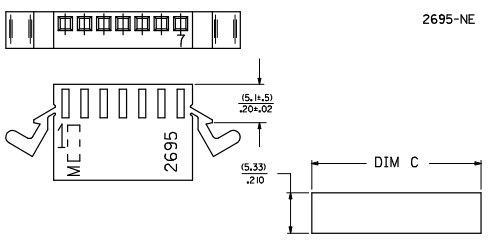







NO. OF CKT'S.	DIM. A	DIM. B	DIM. C
1	N/A	(5.10)	(7.18)
2	(7.54±.05)	(5.64)	(9.70)
3	(5.08±.05)	(8.18)	(12.24)
4	(7.62±.05)	(10.72)	(14.78)
5	(5.00±.05)	(13.26)	(17.32)
6	(7.54±.05)	(15.80)	(19.86)
7	(5.00±.05)	(18.34)	(22.40)
8	(7.54±.05)	(20.88)	(24.94)
9	(5.00±.05)	(23.42)	(27.48)
10	(7.54±.05)	(25.96)	(30.02)
11	(5.00±.05)	(28.50)	(32.56)
12	(7.54±.05)	(31.04)	(35.10)
13	(5.00±.05)	(33.58)	(37.64)
14	(7.54±.05)	(36.12)	(40.18)
15	(5.00±.05)	(38.66)	(42.72)
16	(7.54±.05)	(41.20)	(45.26)
17	(5.00±.05)	(43.74)	(47.80)
18	(7.54±.05)	(46.28)	(50.34)
19	(5.00±.05)	(48.82)	(52.88)
20	(7.54±.05)	(51.36)	(55.42)
21	(5.00±.05)	(53.90)	(57.96)
22	(7.54±.05)	(56.44)	(60.50)
23	(5.00±.05)	(58.98)	(63.04)
24	(7.54±.05)	(61.52)	(65.58)
25	(5.00±.05)	(64.06)	(68.12)
26	(7.54±.05)	(66.60)	(70.66)
27	(5.00±.05)	(69.14)	(73.20)
28	(7.54±.05)	(71.68)	(75.74)
29	(5.00±.05)	(74.22)	(78.28)
30	(7.54±.05)	(76.76)	(80.82)
31	(5.00±.05)	(79.30)	(83.36)
32	(7.54±.05)	(81.84)	(85.90)
33	(5.00±.05)	(84.38)	(88.44)
34	(7.54±.05)	(86.92)	(90.98)
35	(5.00±.05)	(89.46)	(93.52)
36	(7.54±.05)	(92.00)	(96.06)
37	(5.00±.05)	(94.54)	(98.60)
38	(7.54±.05)	(97.08)	(101.14)
39	(5.00±.05)	(99.62)	(103.68)
40	(7.54±.05)	(102.16)	(106.22)

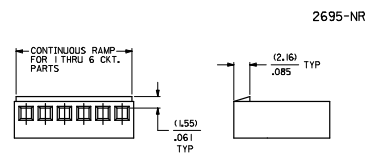

2695 - N * *
NO. OF. CIRCUITS

VOID LOCATION SEE CHART

	BLANK	MOUNTING EARS	RAMP	POLARIZING RIBS	DYED	MAT'L	RETENTION PEG
E	NO	NO	NO	NO	NO	NOTE 1A	NO
R	YES	NO	NO	NO	NO	NOTE 1A	NO
RPD	NO	YES	NO	NO	NO	NOTE 1A	NO
RP	NO	YES	YES	NO	NO	NOTE 1A	NO
RPD	NO	YES	YES	YES	YES	NOTE 1A	NO
C	NO	NO	NO	NO	NO	NOTE 1A	YES
RP-BK	NO	YES	YES	NO	NO	NOTE 1B	NO

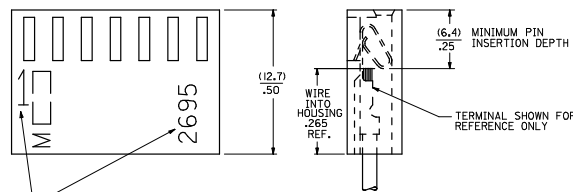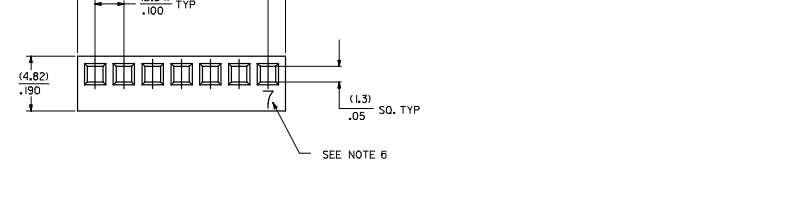

- NOTES
- MATERIAL A - NYLON UL94V-0, COLOR WHITE
B - NYLON UL94V-0, COLOR BLACK
 - FINISH SEE TERMINAL DRAWING
 - THIS HOUSING CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-10-07.
 - PACKAGING N/A
 - HOUSING TO BE USED WITH CRIMP TYPE TERMINAL NUMBER 2759, 22-30 GAUGE WIRE WITH (1.57)/.062 DIAMETER MAXIMUM WIRE INSULATION.
 - LAST CIRCUIT NUMBER TO BE DESIGNATED ON 7 CKTS. AND HIGHER, EXCEPT WHEN 'N'X' APPEARS.
 - CIRCUIT NUMBER '1' AND ENGINEERING NUMBER TO APPEAR ON PARTS 3 CKTS. AND HIGHER.

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
3 AM3	2 PLACES ± .10	MM/IN	---	INCH	☉
2 AM3	3 PLACES ± .05				
1 AM4	1 PLACE ± 0.25				
SHT. REV.	ANGULAR ± 1/2°				

REVISIONS

REV.	DESCRIPTION	DATE
1	REVISED CAVITY BOX	2008/07/24
2	REVISED CAVITY BOX	2008/07/24
3	REVISED CAVITY BOX	2008/07/24
4	REVISED CAVITY BOX	2008/07/24

DRAWN BY PEREZ-ARGUET 1988/02/25
CHECKED BY PATEL 1988/02/25
APPROVED BY LENZ 1988/02/25

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-2695

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

2695-NC*																	
PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS
N/A	2695-1C																
	2695-2C																
	2695-3C																
	2695-4C																
	2695-5C																
	2695-6C																
	2695-7C																
	2695-8C																
	2695-9C																
	2695-10C																
	2695-11C																
	2695-12C																
	2695-13C																
	2695-14C																
	2695-15C																
	2695-16C																
	2695-17C																
	2695-18C																
	2695-19C																
	2695-20C																
	2695-21C																
	2695-22C																
	2695-23C																
	2695-24C																
	2695-25C																
	2695-26C																
	2695-27C																
	2695-28C																
	2695-29C																
	2695-30C																
	2695-31C																
	2695-32C																
	2695-33C																
	2695-34C																
	2695-35C																
	2695-36C																
	2695-37C																
	2695-38C																
	2695-39C																
	2695-40C																

UPDATE TITLE BLOCK REC. NO. LCP2004-1024 2005/11/01 DRAWN BY AM LCP2004-1024 2005/11/01 CHECKED BY AM LCP2004-1024 2005/11/01 APPROVED BY AM LCP2004-1024 2005/11/01	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr><th></th><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES</td><td>±.004</td><td>±.0001</td></tr> <tr><td>3 PLACES</td><td>±.005</td><td>±.0002</td></tr> <tr><td>2 PLACES</td><td>±.007</td><td>±.0003</td></tr> <tr><td>1 PLACE</td><td>±.010</td><td>±.0005</td></tr> </table>		mm	INCH	4 PLACES	±.004	±.0001	3 PLACES	±.005	±.0002	2 PLACES	±.007	±.0003	1 PLACE	±.010	±.0005	DIMENSION STYLE MM/IN DRAWN BY DATE SAM IEC 1989/10/30 CHECKED BY DATE PATEL 1989/10/30 APPROVED BY DATE LENZ 1989/10/30	SCALE --- DESIGN UNITS INCH THIRD ANGLE PROJECTION 	TITLE (2.54)/.100 HOUSING FOR KK CRIMP TYPE TERMINALS 2695 SERIES DRAWING MOLEX INCORPORATED MATERIAL NO. LCP2004-1024 DOCUMENT NO. SD-2695 SHEET NO. 3 OF 3
		mm	INCH																	
	4 PLACES	±.004	±.0001																	
	3 PLACES	±.005	±.0002																	
2 PLACES	±.007	±.0003																		
1 PLACE	±.010	±.0005																		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		