


Fig. 1

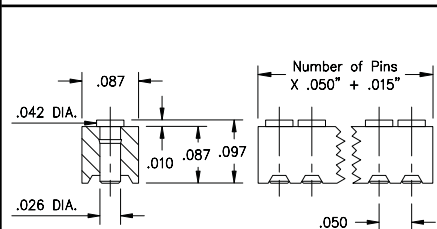

Coplanarity .005". For Pin Counts >20 positions consult Technical Support.

Fig. 2


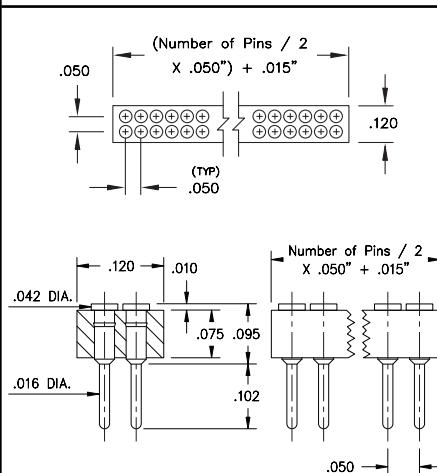



Fig. 3

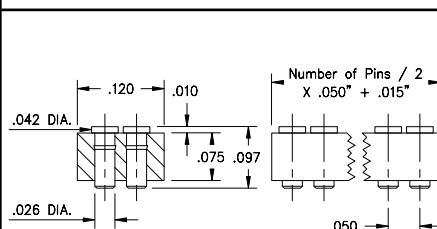

Coplanarity .005". For Pin Counts >40 positions consult Technical Support.

Fig. 4

- Series 856, 857 single and double row strips may be cut to any length.
- Spring Target connectors present a large flat surface for making tangent connections to our standard .019" dia spring pin plungers. The target connectors provide an excellent gold plated conductive path back to the board mounted spring pin connector.
- Target connectors use MM #1933 and #1935 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

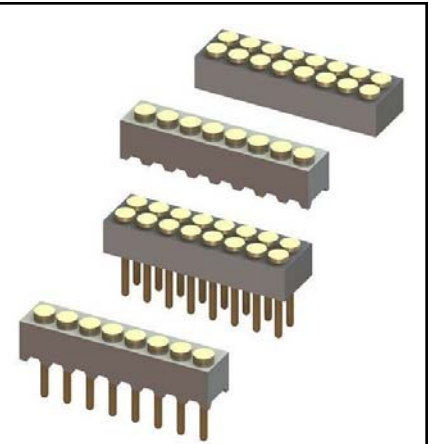

Ordering Information

Fig. 1	Series 856...051	Standard Solder Tails
	856-10-0_ -10-051000	Specify # of pins → 01-20
Fig. 2	Series 856...051	Surface Mount
	856-10-0_ -30-051000	Specify # of pins → 02-20
Fig. 3	Series 857...051	Standard Solder Tails
	857-10-0_ -10-051000	Specify # of pins → 04-40
Fig. 4	Series 857...051	Surface Mount
	857-10-0_ -30-051000	Specify # of pins → 04-40
<div> <div>For Electrical, Mechanical & Environmental Data, See pg. 4</div> <div>RoHS 2002/95/EC</div> </div>		
PLATING CODE = 10		
Pin Plating 10 μ" Au		