


Fig. 1

- Series 856, 857 single and double row strips may be cut to any length.
- Spring Target connectors present a large flat surface for making tangent connections to our standard 0,48 dia spring pin plungers. The target connectors provide an excellent gold plated conductive path back to the board mounted spring pin connector.
- Target connectors use MM #1933 and #1935 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

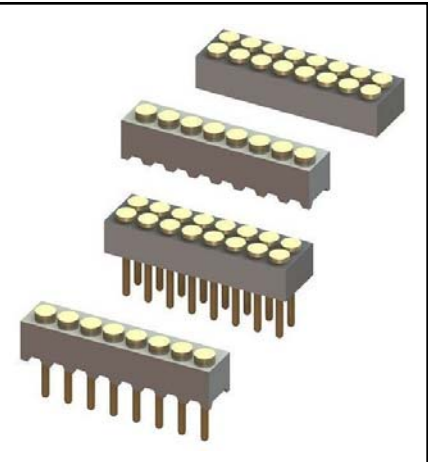

Ordering Information

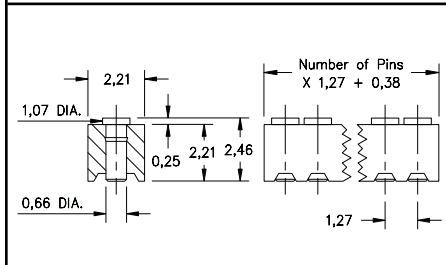


Fig. 2

Coplanarity 0,13. For Pin Counts >20 positions consult Technical Support.

Fig. 1

Series 856...051 Standard Solder Tails

856-10-0__-10-051000
Specify # of pins ↘ 01-20

Fig. 2

Series 856...051 Surface Mount

856-10-0__-30-051000
Specify # of pins ↘ 02-20

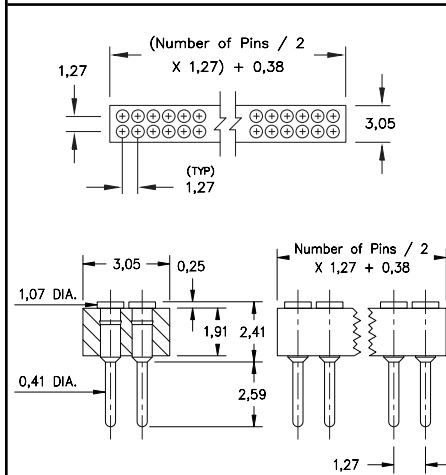


Fig. 3

Fig. 3

Series 857...051 Standard Solder Tails

857-10-0__-10-051000
Specify # of pins ↘ 04-40

Fig. 4

Series 857...051 Surface Mount

857-10-0__-30-051000
Specify # of pins ↘ 04-40

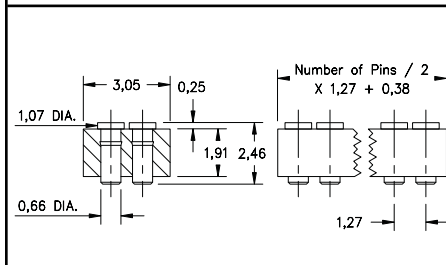


Fig. 4

Coplanarity 0,13. For Pin Counts >40 positions consult Technical Support.

*For Electrical,
 Mechanical & Environmental
 Data, See pg. 4*



PLATING CODE =	10		
Pin Plating	0,25µm Au		