

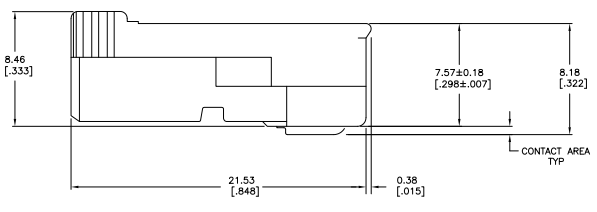


THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01		REVISED PER EDD-11-005033			

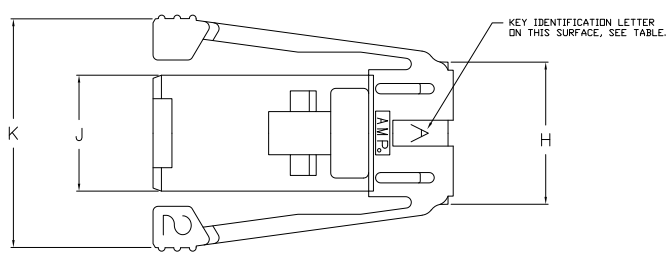

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV. 00	DATE	DESCRIPTION	BY	CHK	APP
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.		00					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL SPECIFICATION		TE Connectivity			
FRACTIONAL DECIMALS		M. BULLMSLEY		PLUG SUB-ASSY, ROUND CABLE, 36 SERIES, S0L			
DECIMALS		108-2047					
ANGLES		114-2090					
HOLE POSITION		A1		DATE	SIZE	DRAWING NO.	REVISED TO
HOLE SIZE		CUSTOMER DRAWING		000779	G=520532		
HOLE DIA				SCALE	1	2	YES

1. PREFIX AND SUFFIX NUMBERS MUST MATCH THOSE ON RECEPTACLE FOR PARTS TO MATE.
- △** MATERIAL:  
HOUSING- POLYCARBONATE  
CONTACT- COPPER ALLOY
- △** FINISH:  
HOUSING- SHDKE GRAY  
CONTACT- 0.00127(.000050) MIN NICKEL OVER ENTIRE PART, 0.00002(.000001) GOLD FLASH OVER ENTIRE PART, 0.00127(.000050) MIN GOLD OVER CONTACT AREA.
4. FOR TERMINATION OF CABLE WHOSE INDIVIDUAL CONDUCTORS HAVE AN INSULATION OUTER DIAMETER OF 0.91(0.36) NOMINAL (SEE APPLICATION SPEC.)
- △** CABLES SHOULD MEET AMP DRAWING SPECIFICATIONS 520730-1.
- △** CABLES SHOULD MEET AMP DRAWING SPECIFICATIONS 520731-1.
- △** CABLES SHOULD MEET AMP DRAWING SPECIFICATIONS 520732-1.
- △** CABLES SHOULD MEET AMP DRAWING SPECIFICATIONS 520733-1.
9. BULK CABLE IS NOT AVAILABLE FROM AMP INC.
10. FOR TERMINATION OF 26 OR 28 AWG, 7 STRANDED, ROUND CABLE WITH 0.89(.035) TO 0.96(.038) O.D. PVC CONDUCTOR INSULATION PER LISTED DRAWING SPECIFICATIONS.
11. TOP SHIELD, BOTTOM SHIELD, AND FERRULE TO BE PURCHASED SEPERATELY TO COMPLETE THE ASSEMBLY.
12. BOOT IS OPTIONAL.
- △**3 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

REV	DATE	DESCRIPTION	BY	CHKD	APPD
00					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

REV	DATE	DESCRIPTION	BY	CHKD	APPD
1					

<p><small>THIS DRAWING IS A CONTROLLED DOCUMENT.</small></p> <p><small>REV</small> DIMENSIONS IN (MM) TYPICAL DIMENSIONS AS SHOWN TYPICAL DIMENSIONS AS SHOWN TYPICAL DIMENSIONS AS SHOWN TYPICAL DIMENSIONS AS SHOWN</p> <p><small>DESIGNED BY M. HILMUSLEY 108-2047</small></p>	<p style="text-align: center;"><b>TE Connectivity</b></p> <p style="text-align: center;"><b>PLUG SUB-ASSY, ROUND CABLE, 36 SERIES, SOL</b></p> <p style="text-align: center;">114-2090</p> <p style="text-align: center;">A1 00779 G=520532</p> <p style="text-align: center;">CUSTOMER DRAWING</p>
---	---