


DESCRIPTION: 2MM SHUNT LOW PROFILE, .075" 15 MICROINCH GOLD

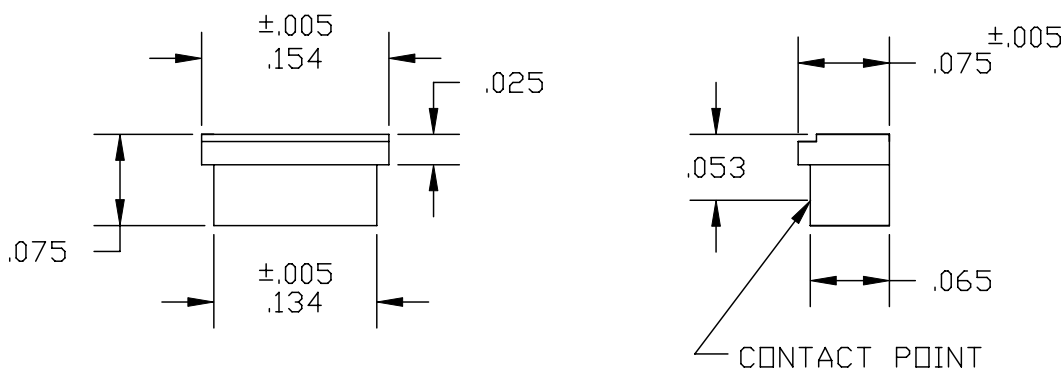

MATERIAL: HOUSING: HIGH TEMP. (PA-6T) 260° PROCESS TEMP.

CONTACT: BERYLLIUM COPPER

PLATING: 15 MICRO-INCHES PALLADIUM/NICKEL WITH GOLD FLASH OVERALL

ELECTRICALS: CURRENT RATING: 1.0 AMPERE MAX.


CONTACT RESISTANCE: 20 MILLIOHM MAX.

DIELECTRIC WITHSTANDING: 250 VAC @SEA LEVEL

INSULATION RESISTANCE: 10,000 MOHMS MIN.

OPERATING TEMP: -55°C TO 105°C

RoHS COMPLIANT

| | | | | |
|---|---|--|-----------------------|-------------------|
|  | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | | DRAWN: PAM JENKINS | DATE: 12-12-06 |
| | <h1>NorComp</h1> | | CHECKED: | DATE: |
| SCALE: | | | SHEET 1 OF 1 | REV 1 |
| DWG NO. 810-002-LP1R001 | | | | |