

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APPD
AD	00	T1	REVISED PER ECO-11-004917	11MAR11	RK HMR

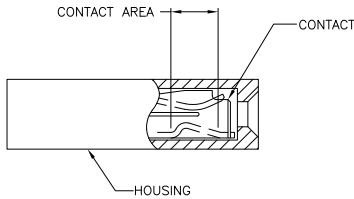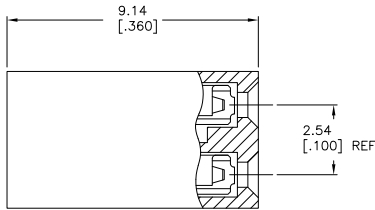

- 1 MATERIAL:
HOUSING: FLAME RETARDANT NYLON, 94V-0,
OR FLAME RETARDANT POLYESTER 94V-0.
CONTACT: PHOSPHOR BRONZE.
- 2 CONTACT PLATED WITH 0.00076 [.000030] GOLD INLAY OVER
0.00076 [.000030] NICKEL IN CONTACT AREA ONLY.
- 3 CONTACT PLATED WITH 0.0013 [.000050] GOLD INLAY OVER
0.00076 [.000030] NICKEL IN CONTACT AREA ONLY.
- 4 CONTACT PLATED WITH 0.0025 [.000100] TIN OVER ALL.
- 5 CONTACT PLATED WITH 0.00038 [.000015] GOLD INLAY OVER
0.00076 [.000030] NICKEL IN CONTACT AREA ONLY.
- 6 HOUSING CUT-OFF BURR NOT EXCEED 0.13 [.005].
- 7 CONNECTOR MATES WITH 0.61 [.024] TO 0.66 [.026] SQUARE
PIN. PIN LENGTH 4.45 [.175] MIN. TO 8.38 [.330] MAX.
- 8 CONTACT PLATED WITH 0.0025 [.000100] MATTE TIN OVER ALL.

OBsolete	BLACK	4-530153-1
OBsolete	BLACK	3-530153-2
OBsolete	BLACK	2-530153-2
OBsolete	NATURAL	2-530153-1
OBsolete	BLACK	1-530153-2
OBsolete	RED	1-530153-0
OBsolete	BLUE	530153-6
OBsolete	YELLOW	530153-4
OBsolete	BLACK	530153-2
OBsolete	NATURAL	530153-1
OBsolete	HOUSING COLOUR	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN	R. VALLEY	12MAR91
DIMENSIONS: mm(INCHES)		CHK	D. MILLER	19MAR91
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPC	D. HUFFMAN	19MAR91
0 PLG	±	NAME	TANDEM SPRING SHUNT CONNECTOR	
1 PLG	±	PRODUCT SPEC	2 POSITION, 2.54 [.100] CL	
2 PLG	± 0.25 (.010)	APPLICATION SPEC	114-1045	
3 PLG	±	WEIGHT	-	
4 PLG	±	SIZE	A2 00779 C=530153	
ANGLES	±	RESTRICTED TO	-	
MATERIAL	SEE TABLE	CUSTOMER DRAWING	SCALE	10:1 SHEET 1 of 1 REV T1