


SECTION A-A
SCALE 10:1

- RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
 - TUBE LOADED.
- ⚠ TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON SOLDER LEGS, BALANCE OF CONTACT NICKEL PLATED.

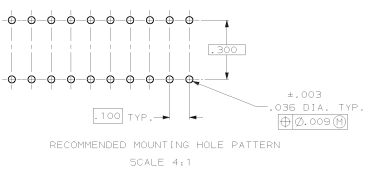

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

OBSOLETE	PHOS. BRZ	BROWN GLASS-FILLED PCT	2-382465-4
TINNED	PHOS. BRZ	BROWN GLASS-FILLED PCT	2-382465-3
OBSOLETE	TINNED	BE.CU.	BROWN GLASS-FILLED PCT
OBSOLETE	TINNED	BE.CU.	BROWN GLASS-FILLED PCT
OBSOLETE	CONTACT FINISH	CONTACT MAT'L	HOUSING MATERIAL
OBSOLETE	CONTACT FINISH	CONTACT MAT'L	HOUSING MATERIAL

THIS DRAWING IS A CONTROLLED DOCUMENT.		REV	REV	REV	REV	REV	REV	REV	REV
INCHES	DECIMALS	64	64	64	64	64	64	64	64
REV	REV	REV	REV	REV	REV	REV	REV	REV	REV
64	64	64	64	64	64	64	64	64	64
FT	FT	FT	FT	FT	FT	FT	FT	FT	FT
6	6	6	6	6	6	6	6	6	6

AMP Incorporated
 Harrisburg, PA 17105-3608

SOCKET ASSY, DIP, HT, 20 POS,
 DIPLOMATE DL

THE USE OF THIS DRAWING IS LIMITED TO THE ORIGINAL PART NO. 00778-382465

DATE DRAWING: 114-1052