


- Closed frame insulator withstands high mechanical impact.
- Available with standard solder pins, 2-level or 3-level wraposts.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 210, 222 and 223 use MM #1001, #0088 or #0089 pins. See pages 136 and 166 for details.
- Insulators are high temperature thermoplastic.

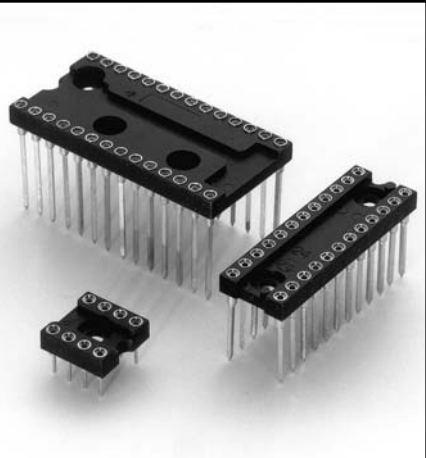

Total number of pins	Pin Spacing			Quantity per tube	Ordering Information		
					Solder Tail	2 Level Wrapost L = 9,4mm	3 Level Wrapost L = 12,96mm
	A	B	C				
6	7,6	7,62	10,1	67	210-XX-306-41-001000	222-XX-306-41-001000	223-XX-306-41-001000
8	10,1	7,62	10,1	50	210-XX-308-41-001000	222-XX-308-41-001000	223-XX-308-41-001000
10	12,6	7,62	10,1	40	210-XX-310-41-001000	222-XX-310-41-001000	223-XX-310-41-001000
14	17,7	7,62	10,1	28	210-XX-314-41-001000	222-XX-314-41-001000	223-XX-314-41-001000
16	20,3	7,62	10,1	25	210-XX-316-41-001000	222-XX-316-41-001000	223-XX-316-41-001000
18	22,8	7,62	10,1	22	210-XX-318-41-001000	222-XX-318-41-001000	223-XX-318-41-001000
20	25,3	7,62	10,1	20	210-XX-320-41-001000	222-XX-320-41-001000	223-XX-320-41-001000
22	27,8	7,62	10,1	18	210-XX-322-41-001000	222-XX-322-41-001000	223-XX-322-41-001000
24	30,4	7,62	10,1	16	210-XX-324-41-001000	222-XX-324-41-001000	223-XX-324-41-001000
22	27,8	10,16	12,7	18	210-XX-422-41-001000	222-XX-422-41-001000	223-XX-422-41-001000
24	30,4	10,16	12,7	16	210-XX-424-41-001000	222-XX-424-41-001000	223-XX-424-41-001000
24	30,4	15,24	17,7	16	210-XX-624-41-001000	222-XX-624-41-001000	223-XX-624-41-001000
28	35,5	15,24	17,7	14	210-XX-628-41-001000	222-XX-628-41-001000	223-XX-628-41-001000
32	40,6	15,24	17,7	12	210-XX-632-41-001000	222-XX-632-41-001000	223-XX-632-41-001000
36	45,7	15,24	17,7	11	210-XX-636-41-001000	222-XX-636-41-001000	223-XX-636-41-001000
40	50,8	15,24	17,7	10	210-XX-640-41-001000	222-XX-640-41-001000	223-XX-640-41-001000
64	81,2	22,86	25,3	6	210-XX-964-41-001000	222-XX-964-41-001000	223-XX-964-41-001000

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select \diamond plating code.



SPECIFY PLATING CODE XX=	13 \diamond	93	99	43 \diamond	44 \diamond
Sleeve (Pin)	0,25 μ m Au	5,08 μ m Sn/Pb	5,08 μ m Sn/Pb	5,08 μ m Sn	5,08 μ m Sn
Contact (Clip)	0,76 μ m Au	0,76 μ m Au	5,08 μ m Sn/Pb	0,76 μ m Au	5,08 μ m Sn

Downloaded from Elcodis.com electronic components distributor