



- Note: Not end stackable.
- Accepts JEDEC PLCCs MS-016 & MS-018 leaded plastic substrates.
- Internal standoffs insure proper positioning of chip carrier in socket.
- Standoffs provide clearance for heat dissipation and cleaning.
- Contacts are plated with 3,81µm tin.
- Insulator material is glass reinforced PPS.

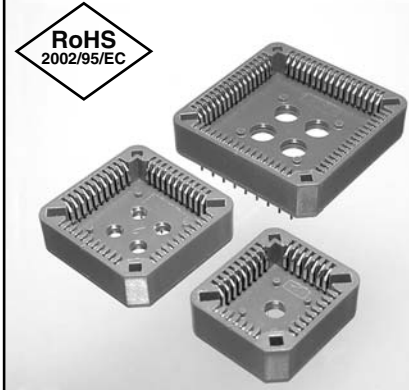

### PRINTED CIRCUIT DRILLING PATTERNS (TOP VIEW)

For Electrical,  
Mechanical & Environmental  
Data, See pg. 113

0,89 dia. min. mounting holes

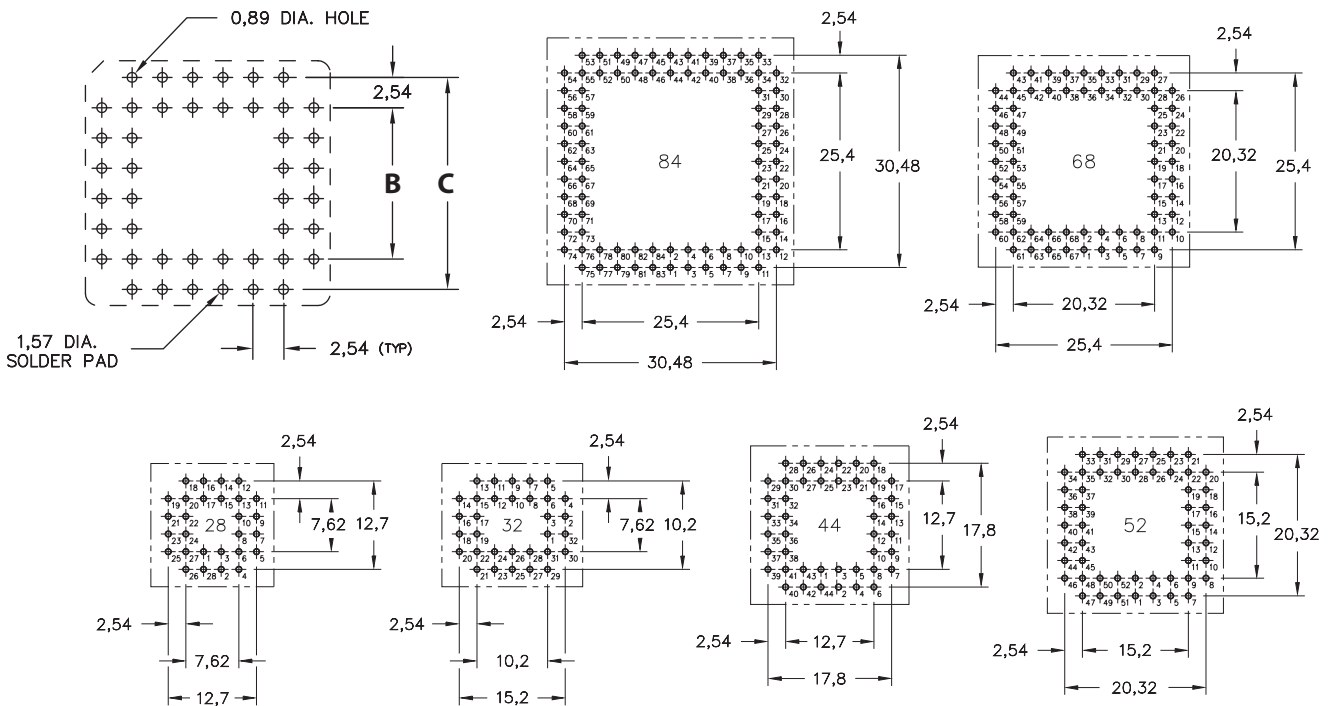

No. of Contacts	Ordering Information	- A -	- B -	- C -	Quantity per Tube
20	940-44-020-24-000000	15,57	5,08	10,16	38
28	940-44-028-24-000000	18,11	7,62	12,7	33
32*	940-44-032-24-000000*	20,7 / 18,1	10,2 / 7,62	15,2 / 12,7	29
44	940-44-044-24-000000	23,19	12,7	17,8	26
52	940-44-052-24-000000	25,73	15,24	20,32	23
68	940-44-068-24-000000	30,81	20,32	25,4	19
84	940-44-084-24-000000	35,89	25,4	30,48	16
100	940-44-100-24-000000	40,72	30,48	35,56	25

Plating Code 44 ◇ = 3,81µm Sn \*RECTANGULAR