



- Designed for solderless press-fit into plated thru-holes.
- Pin lengths are suitable for 1,57 and 2,36 - 3,17 thick panels.
- Required plated thru-hole is 0,91 - 1,04. Use a 1.1mm drill prior to plating.
- Series 104 use MM #0477 or MM #0478 pins with a BeCu #30 contact, rated at 3 amps. See page 133 for details.
- Insulators are high temperature thermoplastic.

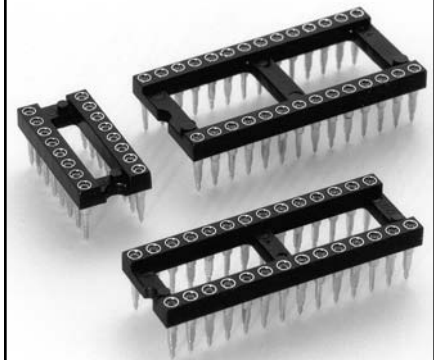

Total number of pins	Pin Spacing			Quantity per tube	Ordering Information	
	A	B	C		L = 4,44 (for 1,57 thick panel)	L = 6,35 (for 3,17 thick panel)

10	12,6	5,08	7,6	40	104-13-210-41-770000	104-13-210-41-780000
4	5,0	7,62	10,1	102	104-13-304-41-770000	104-13-304-41-780000
6	7,6	7,62	10,1	67	104-13-306-41-770000	104-13-306-41-780000
8	10,1	7,62	10,1	50	104-13-308-41-770000	104-13-308-41-780000
10	12,6	7,62	10,1	40	104-13-310-41-770000	104-13-310-41-780000
14	17,7	7,62	10,1	28	104-13-314-41-770000	104-13-314-41-780000
16	20,3	7,62	10,1	25	104-13-316-41-770000	104-13-316-41-780000
18	22,8	7,62	10,1	22	104-13-318-41-770000	104-13-318-41-780000
20	25,3	7,62	10,1	20	104-13-320-41-770000	104-13-320-41-780000
22	27,8	7,62	10,1	18	104-13-322-41-770000	104-13-322-41-780000
24	30,4	7,62	10,1	16	104-13-324-41-770000	104-13-324-41-780000
28	35,5	7,62	10,1	14	104-13-328-41-770000	104-13-328-41-780000
20	25,4	10,16	12,7	20	104-13-420-41-770000	104-13-420-41-780000
22	27,8	10,16	12,7	18	104-13-422-41-770000	104-13-422-41-780000
24	30,4	10,16	12,7	16	104-13-424-41-770000	104-13-424-41-780000
28	35,5	10,16	12,7	14	104-13-428-41-770000	104-13-428-41-780000
32	40,6	10,16	12,7	12	104-13-432-41-770000	104-13-432-41-780000
24	30,4	15,24	17,7	16	104-13-624-41-770000	104-13-624-41-780000
28	35,5	15,24	17,7	14	104-13-628-41-770000	104-13-628-41-780000
32	40,6	15,24	17,7	12	104-13-632-41-770000	104-13-632-41-780000
36	45,7	15,24	17,7	11	104-13-636-41-770000	104-13-636-41-780000
40	50,8	15,24	17,7	10	104-13-640-41-770000	104-13-640-41-780000
42	53,3	15,24	17,7	9	104-13-642-41-770000	104-13-642-41-780000
48	60,9	15,24	17,7	8	104-13-648-41-770000	104-13-648-41-780000
50	63,5	15,24	17,7	8	104-13-650-41-770000	104-13-650-41-780000
52	66,0	15,24	17,7	7	104-13-652-41-770000	104-13-652-41-780000
50	63,5	22,86	25,3	8	104-13-950-41-770000	104-13-950-41-780000
52	66,0	22,86	25,3	7	104-13-952-41-770000	104-13-952-41-780000
64	81,2	22,86	25,3	6	104-13-964-41-770000	104-13-964-41-780000



PLATING CODE XX=	13◇					
Sleeve (Pin)	0,25μm Au					
Contact (Clip)	0,76μm Au					