THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

UOC	DIST
FT	64

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REV PER 0030-0162-99	17NOV00	RB	HW
	G1	REVISED PER ECO-09-021510	05SEP09	KK	AEG

1. RECEPTACLE ACCEPTS A .008–.014 THICK I.C. LEAD.
2. TUBE LOADED.
3. TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN–LEAD (93/7) ON SOLDER LEGS, BALANCE OF CONTACT NICKEL PLATED.
4. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

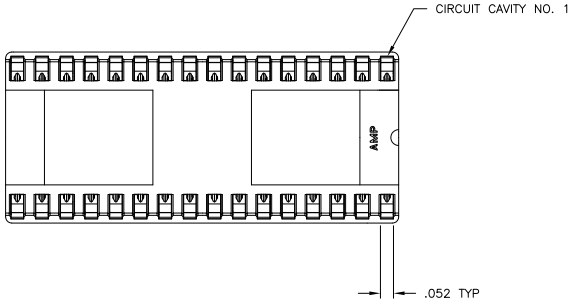

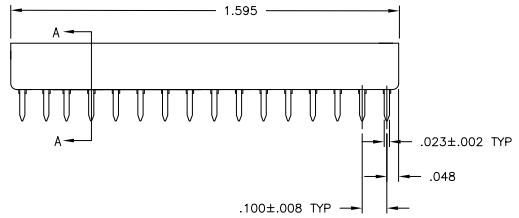

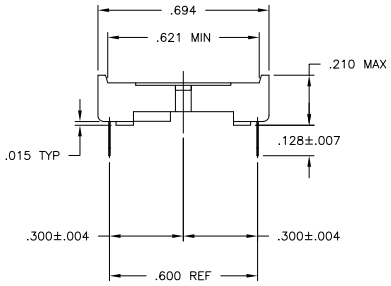

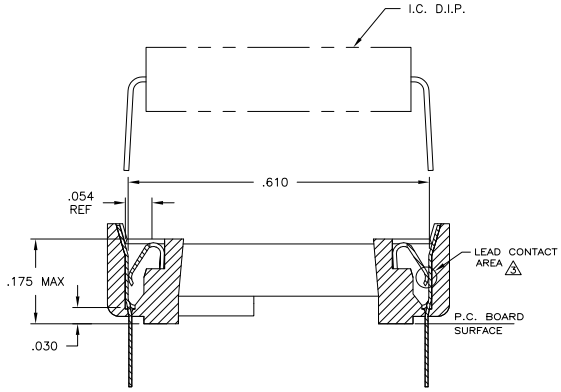

SECTION A–A
SCALE 10:1

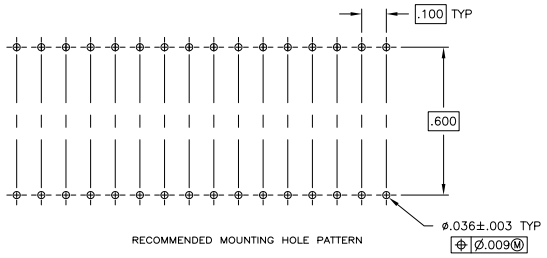

RECOMMENDED MOUNTING HOLE PATTERN

4 OBSOLETE	3	PHOS. BRZ	BROWN GLASS–FILLED PCT	2–382470–4
	TINNED	PHOS. BRZ	BROWN GLASS–FILLED PCT	2–382470–3
OBSOLETE				
OBSOLETE	TINNED	BE.CU.	BROWN GLASS–FILLED PCT	2–382470–1
	CONTACT FINISH	CONTACT MAT'L	HOUSING MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.
DRAWN: R BROWN 17NOV00
CKD: H WYNKOOP 17NOV00
APVD: H WYNKOOP 17NOV00
PRODUCT SPEC: 108–1066
APPLICATION SPEC: 114–1052
WEIGHT: –
CUSTOMER DRAWING
Tyco Electronics Corporation, Harrisburg, PA 17105
NAME: SOCKET ASSY, DIP, HT, 32 POS, DIPLOMATE™ DL
SIZE: A1 | CAGE CODE: 00779 | DRAWING NO: C–382470 | RESTRICTED TO: –
SCALE: 5:1 | SHEET: 1 OF 1 | REV: G1
DIMENSIONS: INCHES | TOLERANCE UNLESS OTHERWISE SPECIFIED: 0 PLC ± –, 1 PLC ± –, 2 PLC ± .005, 3 PLC ± –, 4 PLC ± –, ANGLES ± –
MATERIAL: SEE TABLE
FINISH: SEE TABLE

Downloaded from Elcodis.com electronic components distributor