




**Fig. 1**




**Fig. 2**




**Fig. 3**



**Fig. 4**




**Fig. 5**

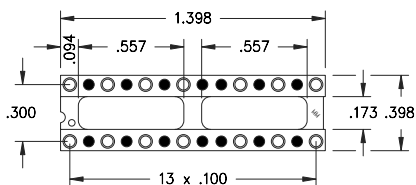

**Fig. 6**

○ = Loaded Position ● = Empty Position

- Relay sockets accept devices with I/O pins on .100" grid.
- Additional Relay DIP socket patterns are available on Page 63.
- Series 110 use MM #1001 receptacles. See page 136 for details.
- Receptacles use Hi-Rel, 4 finger #30 BeCu contact rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

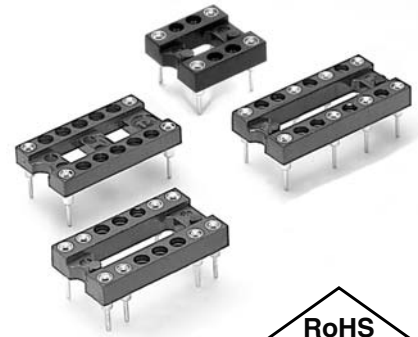

### Ordering Information

<b>Fig. 1</b>	<b>Series 110...002</b> <b>8 Position Relay Socket</b>
	110-XX-210-10-002000
<b>Fig. 2</b>	<b>Series 110...002</b> <b>8 Position Relay Socket</b>
	110-XX-314-10-002000
<b>Fig. 3</b>	<b>Series 110...003</b> <b>8 Position Relay Socket</b>
	110-XX-316-10-003000
<b>Fig. 4</b>	<b>Series 110...004</b> <b>4 Position Relay Socket</b>
	110-XX-316-10-004000
<b>Fig. 5</b>	<b>Series 110...005</b> <b>8 Position Relay Socket</b>
	110-XX-316-10-005000
<b>Fig. 6</b>	<b>Series 110...002</b> <b>14 Position Relay Socket</b>
	110-XX-328-10-002000

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	13◇	93		43◇
Sleeve (Pin)	10μ" Au	200μ" Sn/Pb		200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au		30μ" Au