

Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5


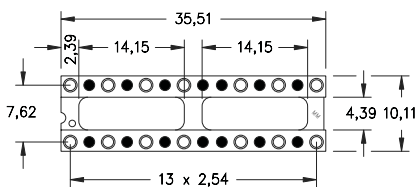


Fig. 6

○ = Loaded Position ● = Empty Position

- Relay sockets accept devices with I/O pins on 2,54 grid.
- Additional Relay DIP socket patterns are available on Page 63.
- Series 110 use MM #1001 receptacles. See page 136 for details.
- Receptacles use Hi-Rel, 4 finger #30 BeCu contact rated at 3 amps. See page 218 for details.
- Insulators are high temp. thermoplastic.

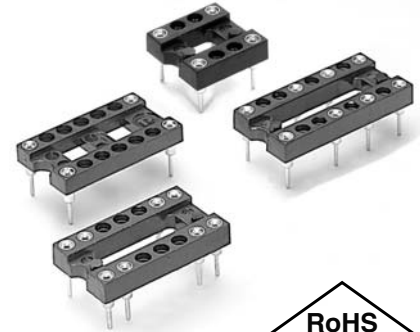

Ordering Information

Fig. 1	Series 110...002	8 Position Relay Socket
	110-XX-210-10-002000	
Fig. 2	Series 110...002	8 Position Relay Socket
	110-XX-314-10-002000	
Fig. 3	Series 110...003	8 Position Relay Socket
	110-XX-316-10-003000	
Fig. 4	Series 110...004	4 Position Relay Socket
	110-XX-316-10-004000	
Fig. 5	Series 110...005	8 Position Relay Socket
	110-XX-316-10-005000	
Fig. 6	Series 110...002	14 Position Relay Socket
	110-XX-328-10-002000	

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	13◇	93	43◇
Sleeve (Pin)	0,25μm Au	5,08μm Sn/Pb	5,08μm Sn
Contact (Clip)	0,76μm Au	0,76μm Au	0,76μm Au