

4


3

2

1


D

D

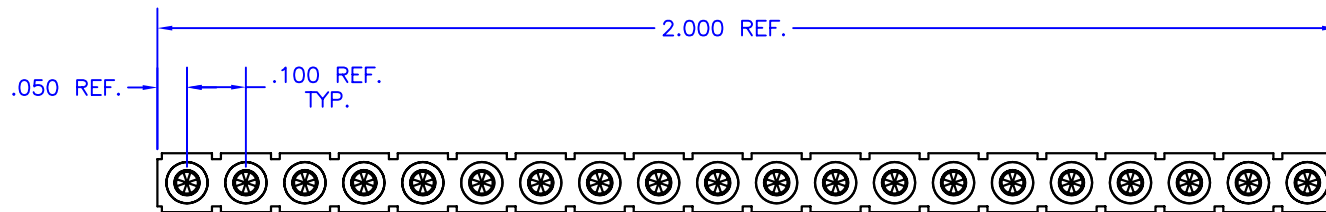


C

C

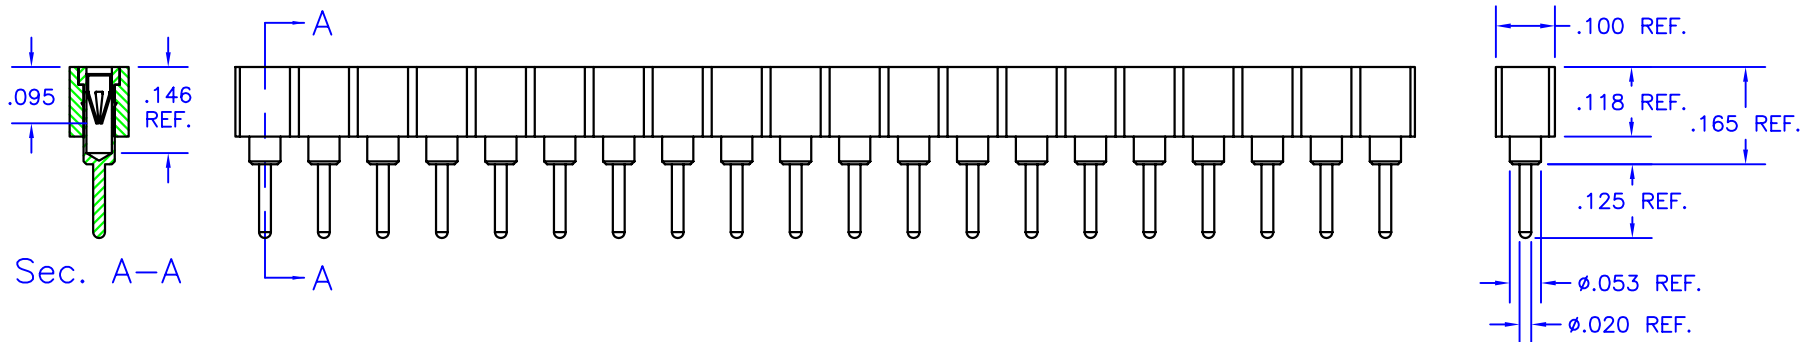

B

B

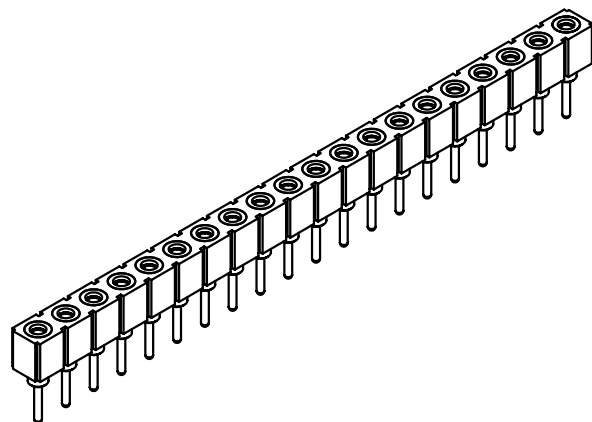

A

A

NOTES:

1. Unless otherwise noted, dimensions are in inches.
2. Shell: 360 brass, half-hard, with 200 μin tin/lead over nickel
3. Contacts: Beryllium copper with 30 μin gold over nickel
4. Body: Glass-filled black polyester, rated UL94V-0
5. Current rating: 3 amps, for 10°C temperature rise.
6. Solder mount in .028-.035 diameter hole.
7. Cut to length to suit application.
8. Mill-Max Part No. 310-93-120-41-001000

| | |
|---|--|
| TOLERANCES - UNLESS OTHERWISE SPECIFIED | |
| DIAMETERS: ±.002 | |
| LENGTHS: ±.005 | |
| ANGLES: ±2° | |



| | | | | | | | |
|-----------------------------|------------|-------|-----|----------|-----------|-----|----------|
| TITLE | | | | PART NO. | | | |
| MATING SOCKET | | | | MS06 | | | |
| FOR .015-.025 DIAMETER PINS | | | | | | | |
| SUBJECT | | | | | | | |
| MECHANICAL DRAWING | | | | | | | |
| ENG: | TECH/DRAW: | DCA | SHL | OF | FILENAME: | REV | DATE |
| D-M | D-M | 46478 | 1 | 1 | MS06-B | B | 10/21/04 |

4

3

2

1