


- For infra-red reflow and vapor phase soldering.
- Gull wing terminals for max. strength and easy in-circuit test.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.
- Insulators are high temperature thermoplastic.

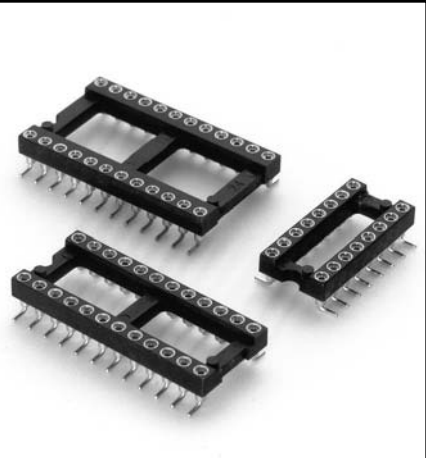

<b>Total number of pins</b>				<b>Quantity per tube</b>	<h2>Ordering Information</h2>
	<b>A</b>	<b>B</b>	<b>C</b>		

	A	B	C	
10	0.5	0.2	0.3	40
4	0.2	0.3	0.4	102
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
10	0.5	0.3	0.4	40
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
22	1.1	0.3	0.4	18
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
20	1.0	0.4	0.5	20
22	1.1	0.4	0.5	18
24	1.2	0.4	0.5	16
28	1.4	0.4	0.5	14
32	1.6	0.4	0.5	12
24	1.2	0.6	0.7	32
28	1.4	0.6	0.7	28
32	1.6	0.6	0.7	24
36	1.8	0.6	0.7	22
40	2.0	0.6	0.7	20
42	2.1	0.6	0.7	18
48	2.4	0.6	0.7	16
50	2.5	0.6	0.7	16
52	2.6	0.6	0.7	14
50	2.5	0.9	1.0	16
52	2.6	0.9	1.0	14
64	3.2	0.9	1.0	12

*For RoHS compliance select ◇ plating code.*

	110-XX-210-41-105000
	110-XX-304-41-105000
	110-XX-306-41-105000
	110-XX-308-41-105000
	110-XX-310-41-105000
	110-XX-314-41-105000
	110-XX-316-41-105000
	110-XX-318-41-105000
	110-XX-320-41-105000
	110-XX-322-41-105000
	110-XX-324-41-105000
	110-XX-328-41-105000
	110-XX-420-41-105000
	110-XX-422-41-105000
	110-XX-424-41-105000
	110-XX-428-41-105000
	110-XX-432-41-105000
	110-XX-624-41-105000
	110-XX-628-41-105000
	110-XX-632-41-105000
	110-XX-636-41-105000
	110-XX-640-41-105000
	110-XX-642-41-105000
	110-XX-648-41-105000
	110-XX-650-41-105000
	110-XX-652-41-105000
	110-XX-950-41-105000
	110-XX-952-41-105000
	110-XX-964-41-105000

*For Electrical,  
Mechanical & Environmental  
Data, See pg. 4*

*XX=Plating Code  
See Below*

SPECIFY PLATING CODE XX=		<b>93</b>			<b>43◇</b>	
Sleeve (Pin)		200μ" Sn/Pb			200μ" Sn	
Contact (Clip)		30μ" Au			30μ" Au	

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor