



- For infra-red reflow and vapor phase soldering.
- Gull wing terminals for max. strength and easy in-circuit test.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.
- Insulators are high temperature thermoplastic.

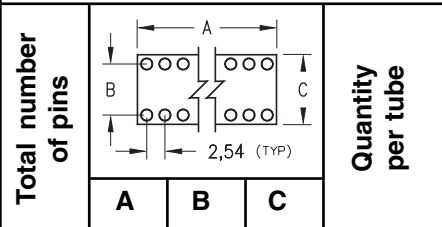

Ordering Information

| Total number of pins | Pin Configuration | | | Quantity per tube |
|----------------------|-------------------|-------|------|-------------------|
| | A | B | C | |
| 10 | 12,6 | 5,08 | 7,6 | 40 |
| 4 | 5,0 | 7,62 | 10,1 | 102 |
| 6 | 7,6 | 7,62 | 10,1 | 67 |
| 8 | 10,1 | 7,62 | 10,1 | 50 |
| 10 | 12,6 | 7,62 | 10,1 | 40 |
| 14 | 17,7 | 7,62 | 10,1 | 28 |
| 16 | 20,3 | 7,62 | 10,1 | 25 |
| 18 | 22,8 | 7,62 | 10,1 | 22 |
| 20 | 25,3 | 7,62 | 10,1 | 20 |
| 22 | 27,8 | 7,62 | 10,1 | 18 |
| 24 | 30,4 | 7,62 | 10,1 | 16 |
| 28 | 35,5 | 7,62 | 10,1 | 14 |
| 20 | 25,4 | 10,16 | 12,7 | 20 |
| 22 | 27,8 | 10,16 | 12,7 | 18 |
| 24 | 30,4 | 10,16 | 12,7 | 16 |
| 28 | 35,5 | 10,16 | 12,7 | 14 |
| 32 | 40,6 | 10,16 | 12,7 | 12 |
| 24 | 30,4 | 15,24 | 17,7 | 32 |
| 28 | 35,5 | 15,24 | 17,7 | 28 |
| 32 | 40,6 | 15,24 | 17,7 | 24 |
| 36 | 45,7 | 15,24 | 17,7 | 22 |
| 40 | 50,8 | 15,24 | 17,7 | 20 |
| 42 | 53,3 | 15,24 | 17,7 | 18 |
| 48 | 60,9 | 15,24 | 17,7 | 16 |
| 50 | 63,5 | 15,24 | 17,7 | 16 |
| 52 | 66,0 | 15,24 | 17,7 | 14 |
| 50 | 63,5 | 22,86 | 25,3 | 16 |
| 52 | 66,0 | 22,86 | 25,3 | 14 |
| 64 | 81,2 | 22,86 | 25,3 | 12 |

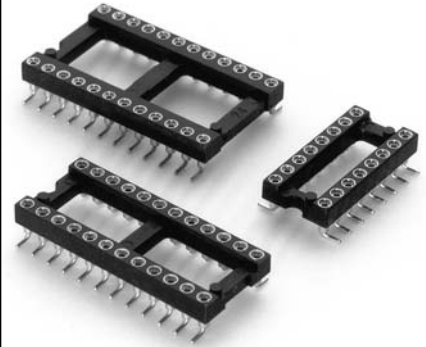

For RoHS compliance select \diamond plating code.

| |
|----------------------|
| 110-XX-210-41-105000 |
| 110-XX-304-41-105000 |
| 110-XX-306-41-105000 |
| 110-XX-308-41-105000 |
| 110-XX-310-41-105000 |
| 110-XX-314-41-105000 |
| 110-XX-316-41-105000 |
| 110-XX-318-41-105000 |
| 110-XX-320-41-105000 |
| 110-XX-322-41-105000 |
| 110-XX-324-41-105000 |
| 110-XX-328-41-105000 |
| 110-XX-420-41-105000 |
| 110-XX-422-41-105000 |
| 110-XX-424-41-105000 |
| 110-XX-428-41-105000 |
| 110-XX-432-41-105000 |
| 110-XX-624-41-105000 |
| 110-XX-628-41-105000 |
| 110-XX-632-41-105000 |
| 110-XX-636-41-105000 |
| 110-XX-640-41-105000 |
| 110-XX-642-41-105000 |
| 110-XX-648-41-105000 |
| 110-XX-650-41-105000 |
| 110-XX-652-41-105000 |
| 110-XX-950-41-105000 |
| 110-XX-952-41-105000 |
| 110-XX-964-41-105000 |

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

| | | | | | | |
|--------------------------|--|--|--------------------|--|--|-----------------|
| SPECIFY PLATING CODE XX= | | | 93 | | | 43 \diamond |
| Sleeve (Pin) | | | 5,08 μ m Sn/Pb | | | 5,08 μ m Sn |
| Contact (Clip) | | | 0,76 μ m Au | | | 0,76 μ m Au |

Downloaded from Elcodis.com electronic components distributor