

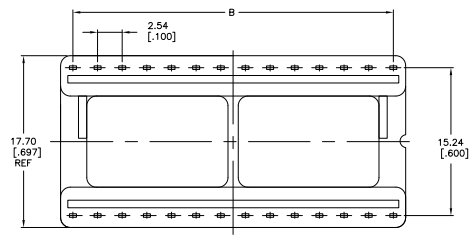

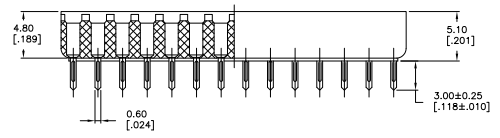



THIS DRAWING IS UNPUBLISHED  
 ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK
AD 00				
M1		REVISED PER EDD-11-004587	11MM11	RK HMR

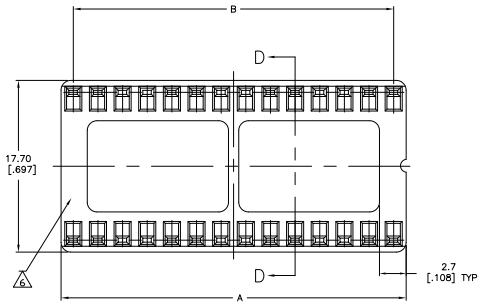

NOTE:

△ MATERIAL:  
 HOUSING: 30% GLASS FILLED PBT, THERMOPLASTIC, BLACK.  
 CONTACT: PHOS BRONZE

△ FINISH: CONTACT PLATING: TIN-LEAD (60μ INCHES MIN.)  
 SOLDERABILITY :95% COVERAGE MIN.;  
 TEST TEMPERATURE=230°C±5°C  
 TEST TIME = 5±5 SECONDS.

3. MECHANICAL SPECS:  
 DURABILITY: 50 CYCLES MIN.  
 INSERTION FORCE:300 GRAMS MAX.  
 WITHDRAWAL FORCE: 20 GRAMS MIN.  
 CONTACT RETENTION: 500 GRAMS MIN.  
 ACCEPTS: 0.20-0.30 [0.008-.012] LEADS

4. ELECTRICAL SPECS:  
 VOLTAGE RATING: 250V AC,DC  
 CONTACT RESISTANCE: 20 MΩ OHMS MAX.  
 CURRENT RATING: 1 AMPERE AC,DC  
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.  
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V MIN.

5. OPERATING TEMPERATURE: -40°C TO +105°C

△ AMP LOGO

△ FINISH: CONTACT PLATING TIN (LEAD FREE); 60 UIN MIN. OVER 30 UIN NI  
 SOLDERABILITY :95% COVERAGE MIN.;  
 TEST TEMPERATURE=260±5°C;  
 TEST TIME = 5±5 SECONDS.

SUPERSEDED BY 1-390262-7  
 SUPERSEDED BY 1-390262-6  
 SUPERSEDED BY 1-390262-5  
 SUPERSEDED BY 1-390262-3  
 SUPERSEDED BY 1-390262-2  
 SUPERSEDED BY 1-390262-1

△	48	60.96 [2.400]	58.42 [2.300]	1-390262-7
△	42	53.34 [2.100]	50.8 [2.000]	1-390262-6
△	40	50.80 [2.000]	48.26 [1.900]	1-390262-5
△	32	40.64 [1.600]	38.10 [1.500]	1-390262-3
△	28	35.56 [1.400]	33.02 [1.300]	1-390262-2
△	24	30.48 [1.200]	27.94 [1.100]	1-390262-1
△	48	60.96 [2.400]	58.42 [2.300]	390262-7
△	42	53.34 [2.100]	50.8 [2.000]	390262-6
△	40	50.80 [2.000]	48.26 [1.900]	390262-5
△	32	40.64 [1.600]	38.10 [1.500]	390262-3
△	28	35.56 [1.400]	33.02 [1.300]	390262-2
△	24	30.48 [1.200]	27.94 [1.100]	390262-1
△	FINISH	POS A±0.20 [0.008]	B±0.15 [0.006]	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT. THE REV. DATE

TE Connectivity

TE CONNECTIVITY  
 DIP SOCKET, .600 CENTER LINE  
 LADDER STYLE

DATE: 11/11/11  
 DRAWING NO: 390262  
 REVISED BY: M1