

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 24FEB.2008.
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	F	LNK	DESCRIPTION	DATE	BY	APPD
		B		ECR-06-014950	21/06/06	AM	FWK
		B1		ECR-10-022205	02FEB11	KK	HMR

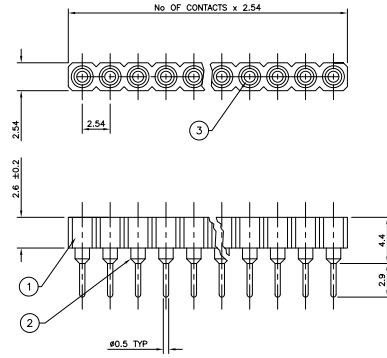

- NOTES:**
- MATERIAL:**
 - 1. INSULATOR - THERMOPLASTIC POLYESTER UL-94-V-0.
 - 2. SLEEVE - BRASS.
 - 3. CONTACT - STAMPED BERYLLIUM COPPER.
 - PIN SPECIFICATION:**
 - CONTACT ACCEPTS: ROUND PIN #0.40 TO 0.56, RECTANGULAR PIN 0.25 x 0.45 (NOMINAL).
 - MECHANICAL DATA:**
 - INSERTION FORCE-- 3.2N MAX/CONTACT.
 - EXTRACTION FORCE-- 0.5N MIN/CONTACT.
 - MECHANICAL LIFE-- 100 CYCLES MIN (0.75µm Au)
 - 50 CYCLES MAX (FLASH Au)
 - 25 CYCLES MAX (5µm Sn)
 - 3.5N MIN.
 - CONTACT RETENTION--
 - SOLDER PROCESS CAPABILITY-- 260°C
 - ELECTRICAL:**
 - CONTACT RESISTANCE-- 10m Ohm MAX.
 - CONTACT RATING-- 1Amp
 - INSULATION RESISTANCE-- AT 500V AC BETWEEN ANY 2 ADJACENT CONTACTS MIN 10000m Ohm.
 - DIELECTRIC VOLTAGE-- MIN 1000V RMS.
 - ENVIRONMENTAL:**
 - OPERATION TEMPERATURE-- -55 +125°C
 - BOX PACKAGED WITH NUMBER OF PARTS PER BOX AS INDICATED IN TABLE. THE LABEL WILL HAVE TYCO PART NUMBER, XX QTY PER BOX, DATE CODE AND RoHS DIRECTIVE DETAILS (RoHS 2002/95/EC). OUTER BOX / SHIPPER CARTON TO BE LABELLED WITH TYCO PART NUMBER, TOTAL XXX QTY PER OUTER BOX / SHIPPER CARTON, DATE CODE AND RoHS DIRECTIVE DETAILS (RoHS 2002/95/EC).**
 - FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE.**

OBSELETE

2000	0.75µm Au	0.25µm Au OVER 2-3µm Ni	5	△4-1814655-8
2000	FLASH Au	5µm Sn OVER 2-3µm Ni	5	4-1814655-7
2000	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	5	△4-1814655-6
2000	0.75µm Au	5µm Sn OVER 2-3µm Ni	5	△4-1814655-5
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	64	△4-1814655-4
500	FLASH Au	5µm Sn OVER 2-3µm Ni	64	△4-1814655-3
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	64	△4-1814655-2
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	64	△4-1814655-1
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	60	△4-1814655-0
500	FLASH Au	5µm Sn OVER 2-3µm Ni	60	△3-1814655-9
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	60	△3-1814655-8
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	60	△3-1814655-7
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	50	△3-1814655-6
500	FLASH Au	5µm Sn OVER 2-3µm Ni	50	△3-1814655-5
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	50	△3-1814655-4
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	50	△3-1814655-3
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	40	△3-1814655-2
500	FLASH Au	5µm Sn OVER 2-3µm Ni	40	△3-1814655-1
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	40	△3-1814655-0
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	40	△3-1814655-0
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	32	△2-1814655-8
500	FLASH Au	5µm Sn OVER 2-3µm Ni	32	△2-1814655-7
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	32	△2-1814655-6
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	32	△2-1814655-5
500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	30	△2-1814655-4
500	FLASH Au	5µm Sn OVER 2-3µm Ni	30	△2-1814655-3
500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	30	△2-1814655-2
500	0.75µm Au	5µm Sn OVER 2-3µm Ni	30	△2-1814655-1
700	0.75µm Au	0.25µm Au OVER 2-3µm Ni	26	△2-1814655-0
700	FLASH Au	5µm Sn OVER 2-3µm Ni	26	△1-1814655-9
700	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	26	△1-1814655-8
700	0.75µm Au	5µm Sn OVER 2-3µm Ni	26	△1-1814655-7
1000	0.75µm Au	0.25µm Au OVER 2-3µm Ni	20	△1-1814655-6
1000	FLASH Au	5µm Sn OVER 2-3µm Ni	20	1-1814655-5
1000	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	20	1814655-4
1000	0.75µm Au	5µm Sn OVER 2-3µm Ni	20	1-1814655-3
1000	0.75µm Au	0.25µm Au OVER 2-3µm Ni	16	△1-1814655-2
1000	FLASH Au	5µm Sn OVER 2-3µm Ni	16	1-1814655-1
1000	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	16	△1-1814655-0
1000	0.75µm Au	5µm Sn OVER 2-3µm Ni	16	△1-1814655-0
1000	0.75µm Au	0.25µm Au OVER 2-3µm Ni	10	△1-1814655-9
1000	FLASH Au	5µm Sn OVER 2-3µm Ni	10	1814655-7
1000	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	10	△1-1814655-6
1000	0.75µm Au	5µm Sn OVER 2-3µm Ni	10	1814655-5
2500	0.75µm Au	0.25µm Au OVER 2-3µm Ni	4	△1-1814655-4
2500	FLASH Au	5µm Sn OVER 2-3µm Ni	4	△1-1814655-3
2500	5µm MIN Sn	5µm Sn OVER 2-3µm Ni	4	△1-1814655-2
2500	0.75µm Au	5µm Sn OVER 2-3µm Ni	4	△1-1814655-1
No. Of Parts Per Box	Contact Plating	Sleeve Plating	Number Of Positions	Part No

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ±0.1, 1 PLG ±0.1, 2 PLG ±0.1, 3 PLG ±0.1, 4 PLG ±0.1, ANGLES ±0.5. FINISH: -.

00AUG05
A. Morley
S. Parlow
F. Wheeler-King
24FEB06
24FEB06
NAME: Whistler-King

Tyco Electronics
Tyco Electronics Corporation
Bideford, UK, EX39 4HE

SIP SOCKET STRAIGHT1
SINGLE ROW

SIZE: A2
CASE CODE: 00779
DRAWING NO: 1814655
RESTRICTED TO: -

CUSTOMER DRAWING
SCALE: 4:1
SHEET: 1 OF 1
REV: B1

AMP 1471-9 REV 31MM2000