


- Unique floating contacts compensate for the effects of unevenly dispensed solder paste.
- High temperature insulator can withstand infra-red reflow and vapor phase soldering.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 114 use MM #1434 pins. See page 133 for details.

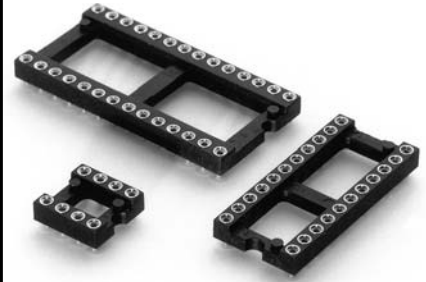

Total number of pins				Quantity per tube	Ordering Information	
	A	B	C			

	A	B	C			
10	12,6	5,08	7,6	41	114-XX-210-41-117000	 <div style="border: 1px solid green; padding: 5px; display: inline-block; color: blue; font-size: small;">For RoHS compliance select <span style="color: blue;">◇</span> plating code.</div>
4	5,0	7,62	10,1	100	114-XX-304-41-117000	
6	7,6	7,62	10,1	67	114-XX-306-41-117000	
8	10,1	7,62	10,1	50	114-XX-308-41-117000	
10	12,6	7,62	10,1	40	114-XX-310-41-117000	
14	17,7	7,62	10,1	28	114-XX-314-41-117000	
16	20,3	7,62	10,1	25	114-XX-316-41-117000	
18	22,8	7,62	10,1	22	114-XX-318-41-117000	
20	25,3	7,62	10,1	20	114-XX-320-41-117000	
22	27,8	7,62	10,1	18	114-XX-322-41-117000	
24	30,4	7,62	10,1	16	114-XX-324-41-117000	
28	35,5	7,62	10,1	14	114-XX-328-41-117000	
20	25,4	10,16	12,7	20	114-XX-420-41-117000	
22	27,8	10,16	12,7	18	114-XX-422-41-117000	
24	30,4	10,16	12,7	16	114-XX-424-41-117000	
28	35,5	10,16	12,7	14	114-XX-428-41-117000	
32	40,6	10,16	12,7	12	114-XX-432-41-117000	
24	30,4	15,24	17,7	16	114-XX-624-41-117000	
28	35,5	15,24	17,7	14	114-XX-628-41-117000	
32	40,6	15,24	17,7	12	114-XX-632-41-117000	
36	45,7	15,24	17,7	11	114-XX-636-41-117000	
40	50,8	15,24	17,7	10	114-XX-640-41-117000	
42	53,3	15,24	17,7	9	114-XX-642-41-117000	
48	60,9	15,24	17,7	8	114-XX-648-41-117000	
50	63,5	15,24	17,7	8	114-XX-650-41-117000	
52	66,0	15,24	17,7	7	114-XX-652-41-117000	
50	63,5	22,86	25,3	8	114-XX-950-41-117000	<div style="border: 1px solid blue; border-radius: 50%; padding: 10px; display: inline-block; color: blue; font-size: small;">XX=Plating Code See Below</div>
52	66,0	22,86	25,3	7	114-XX-952-41-117000	
64	81,2	22,86	25,3	6	114-XX-964-41-117000	

For Electrical, Mechanical & Environmental Data, See pg. 4

SPECIFY PLATING CODE XX=		<b>93</b>		<b>43◇</b>
Sleeve (Pin)		5,08µm Sn/Pb		5,08µm Sn
Contact (Clip)		0,76µm Au		0,76µm Au

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor