
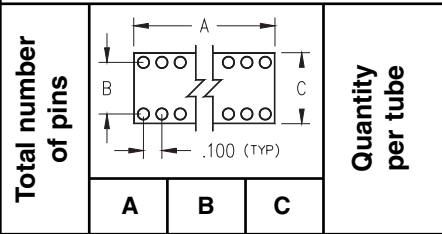


- High temperature thermo-plastic insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching. Chamfered contact entry allows for ease of IC insertion without bent leads.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.

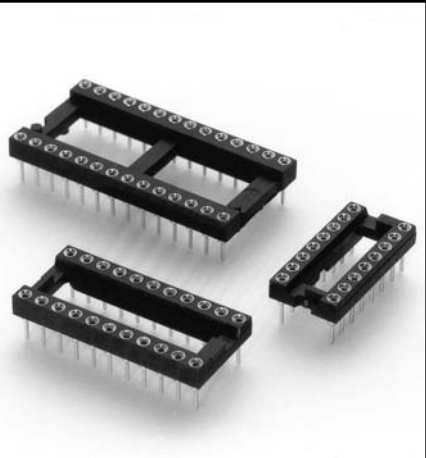

Ordering Information

| Total number of pins | Pin Spacing | | | Quantity per tube |
|----------------------|-------------|-----|-----|-------------------|
| | A | B | C | |
| 6 | 0.3 | 0.3 | 0.4 | 67 |
| 8 | 0.4 | 0.3 | 0.4 | 50 |
| 14 | 0.7 | 0.3 | 0.4 | 28 |
| 16 | 0.8 | 0.3 | 0.4 | 25 |
| 18 | 0.9 | 0.3 | 0.4 | 22 |
| 20 | 1.0 | 0.3 | 0.4 | 20 |
| 24 | 1.2 | 0.3 | 0.4 | 16 |
| 22 | 1.1 | 0.4 | 0.5 | 18 |
| 24 | 1.2 | 0.6 | 0.7 | 16 |
| 28 | 1.4 | 0.6 | 0.7 | 14 |
| 32 | 1.6 | 0.6 | 0.7 | 12 |
| 40 | 2.0 | 0.6 | 0.7 | 10 |

| |
|----------------------|
| 110-XX-306-41-605000 |
| 110-XX-308-41-605000 |
| 110-XX-314-41-605000 |
| 110-XX-316-41-605000 |
| 110-XX-318-41-605000 |
| 110-XX-320-41-605000 |
| 110-XX-324-41-605000 |
| 110-XX-422-41-605000 |
| 110-XX-624-41-605000 |
| 110-XX-628-41-605000 |
| 110-XX-632-41-605000 |
| 110-XX-640-41-605000 |

RoHS
2002/95/EC

For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

| SPECIFY PLATING CODE XX= | 93 | 43 ◇ |
|--------------------------|-------------|----------|
| Sleeve (Pin) | 200μ" Sn/Pb | 200μ" Sn |
| Contact (Clip) | 30μ" Au | 30μ" Au |

Downloaded from Elcodis.com electronic components distributor