
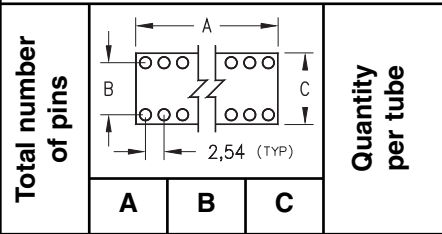


- High temperature thermo-plastic insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching. Chamfered contact entry allows for ease of IC insertion without bent leads.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.

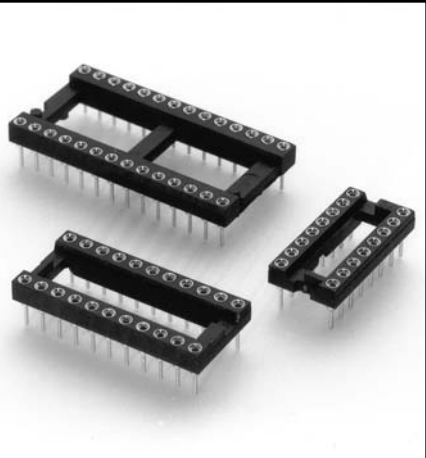

Ordering Information

Total number of pins	Pin Layout Dimensions			Quantity per tube
	A	B	C	
6	7,6	7,62	10,1	67
8	10,1	7,62	10,1	50
14	17,7	7,62	10,1	28
16	20,3	7,62	10,1	25
18	22,8	7,62	10,1	22
20	25,3	7,62	10,1	20
24	30,4	7,62	10,1	16
22	27,8	10,16	12,7	18
24	30,4	15,24	17,7	16
28	35,5	15,24	17,7	14
32	40,6	15,24	17,7	12
40	50,8	15,24	17,7	10

110-XX-306-41-605000
110-XX-308-41-605000
110-XX-314-41-605000
110-XX-316-41-605000
110-XX-318-41-605000
110-XX-320-41-605000
110-XX-324-41-605000
110-XX-422-41-605000
110-XX-624-41-605000
110-XX-628-41-605000
110-XX-632-41-605000
110-XX-640-41-605000

RoHS
2002/95/EC

For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

SPECIFY PLATING CODE XX=	93	43 ◇
Sleeve (Pin)	5,08µm Sn/Pb	5,08µm Sn
Contact (Clip)	0,76µm Au	0,76µm Au

Downloaded from Elcodis.com electronic components distributor