


- Convenient way to load loose receptacles on a PC board.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 614 use MM #1401 pins. See page 141 for details.
- Insulators are high temperature thermoplastic.



Total number of pins				Quantity per tube	Ordering Information
	A	B	C		

	A	B	C		
10	0.5	0.2	0.3	40	614-XX-210-41-001000
4	0.2	0.3	0.4	102	614-XX-304-41-001000
6	0.3	0.3	0.4	67	614-XX-306-41-001000
8	0.4	0.3	0.4	50	614-XX-308-41-001000
10	0.5	0.3	0.4	40	614-XX-310-41-001000
14	0.7	0.3	0.4	28	614-XX-314-41-001000
16	0.8	0.3	0.4	25	614-XX-316-41-001000
18	0.9	0.3	0.4	22	614-XX-318-41-001000
20	1.0	0.3	0.4	20	614-XX-320-41-001000
22	1.1	0.3	0.4	18	614-XX-322-41-001000
24	1.2	0.3	0.4	16	614-XX-324-41-001000
28	1.4	0.3	0.4	14	614-XX-328-41-001000
20	1.0	0.4	0.5	20	614-XX-420-41-001000
22	1.1	0.4	0.5	18	614-XX-422-41-001000
24	1.2	0.4	0.5	16	614-XX-424-41-001000
28	1.4	0.4	0.5	14	614-XX-428-41-001000
32	1.6	0.4	0.5	12	614-XX-432-41-001000
24	1.2	0.6	0.7	16	614-XX-624-41-001000
28	1.4	0.6	0.7	14	614-XX-628-41-001000
32	1.6	0.6	0.7	12	614-XX-632-41-001000
36	1.8	0.6	0.7	11	614-XX-636-41-001000
40	2.0	0.6	0.7	10	614-XX-640-41-001000
42	2.1	0.6	0.7	9	614-XX-642-41-001000
48	2.4	0.6	0.7	8	614-XX-648-41-001000
50	2.5	0.6	0.7	8	614-XX-650-41-001000
52	2.6	0.6	0.7	7	614-XX-652-41-001000
50	2.5	0.9	1.0	8	614-XX-950-41-001000
52	2.6	0.9	1.0	7	614-XX-952-41-001000
64	3.2	0.9	1.0	6	614-XX-964-41-001000

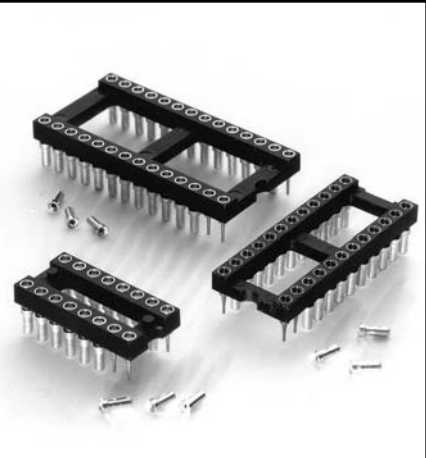

For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

SPECIFY PLATING CODE XX=		93		43 ◇	
Sleeve (Pin)		200μ" Sn/Pb		200μ" Sn	
Contact (Clip)		30μ" Au		30μ" Au	

Downloaded from Elcodis.com electronic components distributor