



P/Ns 1106396 and 1107254 Row-to-Row DIP Adapter Socket

FEATURES


- Adapter Socket allows the use of 0.300 [7.62] center devices when the PCB is drilled on 0.600 [15.24] centers and vice versa, giving the flexibility of using 0.600 [15.24] or 0.300 [7.62] center devices in the same application.

GENERAL SPECIFICATIONS

- SOCKET BODY: black UL 94V-0 glass-filled 4/6 Nylon
- PIN BODY: Brass 360 1/2-hard per UNS C36000, ASTM B16/B16M
- PIN BODY PLATING: 200 μ [5.08 μ] min. 93/7 Sn/Pb per ASTM B579-73 over 100 μ [2.54 μ] Ni per SAE AMS-QQ-N-290
- 4-FINGERED COLLET CONTACT: BeCu per UNS C17200, ASTM B194-08
- CONTACT PLATING: 30 μ [0.762 μ] min. Au per MIL-G-45204 over 50 μ [1.27 μ] min. Ni per SAE AMS-QQ-N-290
- CONTACT CURRENT RATING: 3 amps
- OPERATING TEMPERATURE: 221°F [105°C]
- INSERTION FORCE: 180g/pin; based on 0.018 [0.46] dia. test lead
- WITHDRAWAL FORCE: 90g/pin; based on 0.018 [0.46] dia. test lead
- NORMAL FORCE: 140g/pin; based on 0.018 [0.46] dia. test lead
- ACCEPTS LEADS: 0.015-0.025 [0.38-0.64] dia., 0.110-0.150 [2.79-3.81] long

MOUNTING CONSIDERATIONS

- SUGGESTED PCB HOLE SIZE: 0.035 \pm 0.002 [0.89 \pm 0.05] dia.

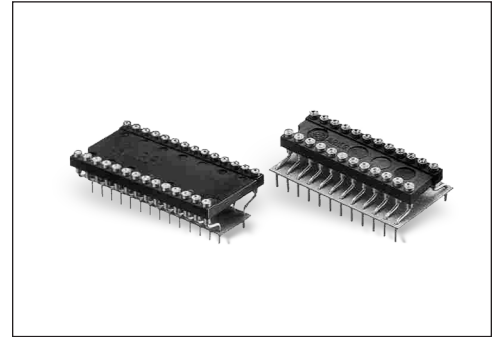

CUSTOMIZATION: In addition to the standard products shown on this page, Aries specializes in custom design and production. Special materials, platings, sizes, and configurations can be furnished, depending on the quantity. **NOTE:** Aries reserves the right to change product general specifications without notice.

ORDERING INFORMATION


P/N 1106396-XXTL for 0.300 DIP-to-0.600 PCB [7.62 to 15.24] Adapter, where XX = number of pins (6 thru 40)

P/N 1107254-XXTL for 0.600 DIP-to-0.300 PCB [15.24 to 7.62] Adapter, where XX = number of pins (6 thru 40)

ALL DIMENSIONS: INCHES [MILLIMETERS]

ALL TOLERANCES: \pm 0.005 [0.13] UNLESS OTHERWISE SPECIFIED

CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

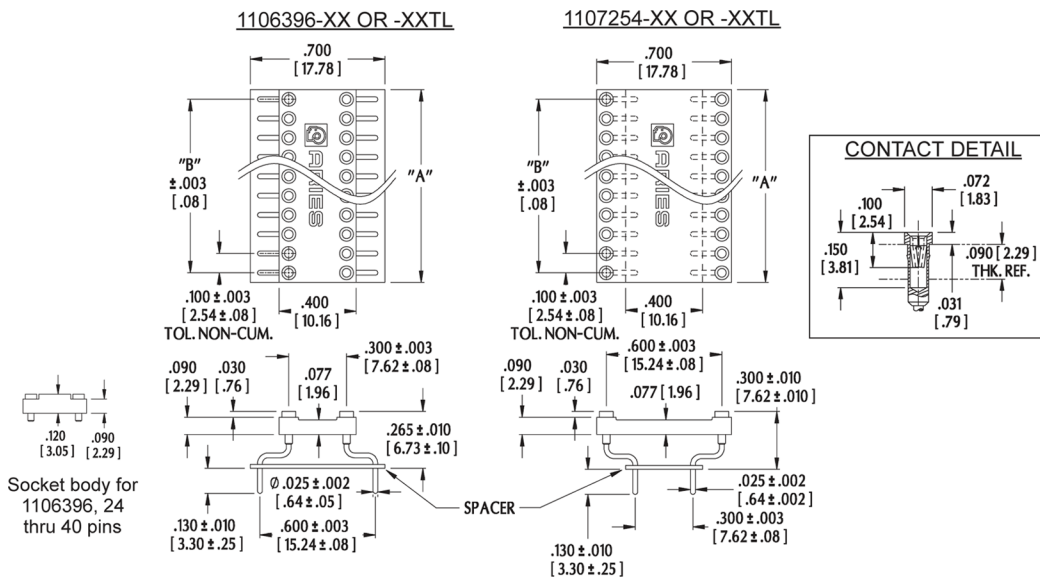

Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM



PRINTOUTS OF THIS DOCUMENT MAY BE OUT OF DATE AND SHOULD BE CONSIDERED UNCONTROLLED

12030
Rev. AA