


Direct Mount Terminals

Feed Through

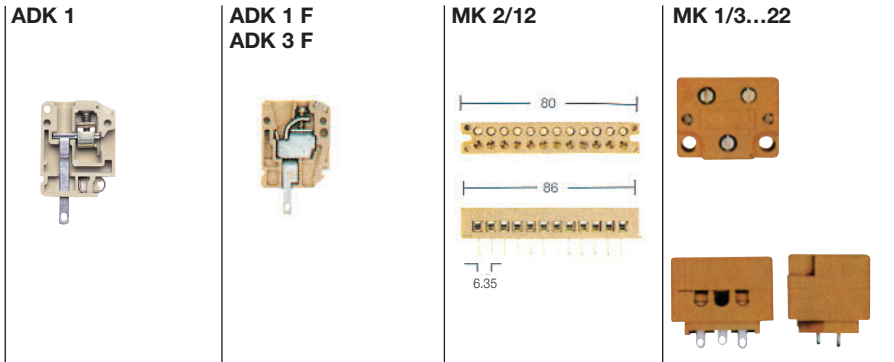


Available Options (thickness mm) For Sheet Metal Version	ADK 1		ADK 1 F ADK 3 F		MK 2/12	MK 1/3...22
	1.5	2.5	1.5	2.5		
PA	0303860000	0301060000	0476060000	0478660000		
3 pole KrG						0261620000
12 pole KrG						0261820000
12 pole PA					0241460000	
22 pole KrG						0301920000

All types except ADK 1 FT and MK 1/3... internal pin 0.8 x 2.8

Dimensions						
Width / Length / Height with pins	mm (in.)	6/22/36.5 (.236/.87/1.44)		6/22/36.5 (.236/.87/1.44)		86/15/23 (2.68/.59/.91)
Length of solder lug/pin	mm (in.)	8.4 (.33)		8.5/7.5 (.33/.30)		8 (.32)
Insulation stripping length	mm (in.)	9 (.35)		11 (.43)		5 (.20)
Technical Data						
Rated voltage / rated current / wire size	UL	300 V / 16 A / #22...12 AWG		300 V / 15 A / #26...14 AWG		300 V / 10 A / #24...12 AWG
	CSA	300 V / 10 A / #26...12 AWG		300 V / 10 A / #22...14 AWG		300 V / 10 A / #24...12 AWG
	VDE	380 VAC / 16 A / 4/1.5 mm ²		380 VAC / 20 A / 2.5/1.5 mm ²		380 VAC / 20 A / 2.5/1.5 mm ²
Torque	Nm (lb. in.)	0.5 (5.0)		0.9 (8.0)		0.4 (4.0)
Clamping screw	M	3		2.5		2.5

End Plate (thickness mm)	Type	Part No.	Type	Part No.	Dimensions
	PA	AP (3) 0476260000	AP (3)	0476260000	MK 1/3
	EP		AP (3)	0360000000	

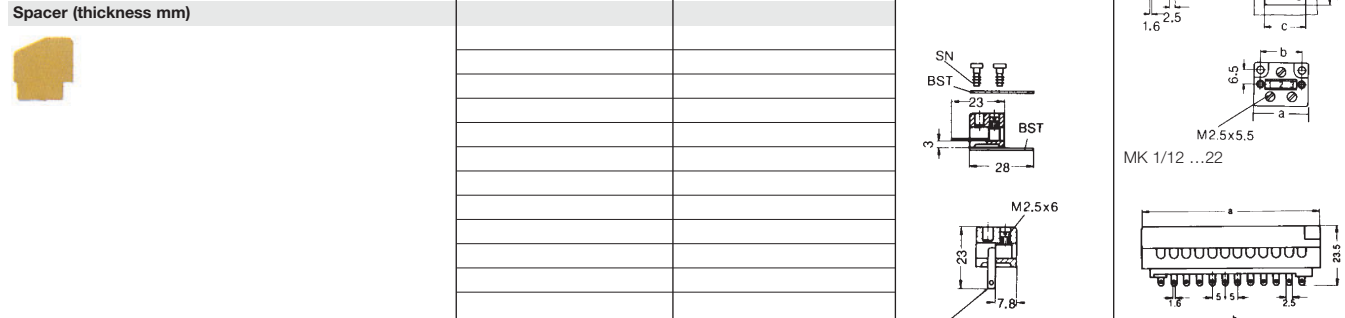

Test Plugs / Sockets	Type	Part No.
	PS 2,3	0180400000

Fuse Pin / Insulating Sleeves / Expansion Rivet	Type	Part No.
	SST 1.3	0306600000
	IH 2.8	0386060000

Marking Tags	Print	Consecutive horizontal		Consecutive vertical		Type	Part No.	Type	Dim.	a	b	b ₁	c
		DEK 5/6	0468660001	DEK 5/6	0468660001								
		DEK 5/6	0468760001	DEK 5/6	0468760001	BSTo 10/12	0245600000	MK 1/12	70	64	64	64.5	
								MK 1/22	120	114	114	114.5	

See Accessories section for end brackets, test plugs, additional marking material and accessories.