
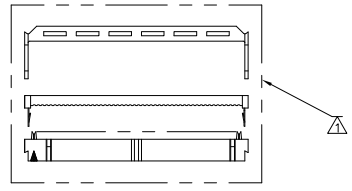
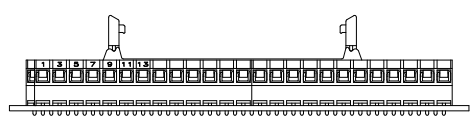
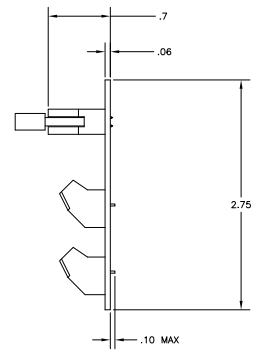


REV	DATE	DESCRIPTION	BY	CHK	APP
0					
A		REVISED PER ECO-05-10413			SS/SRY

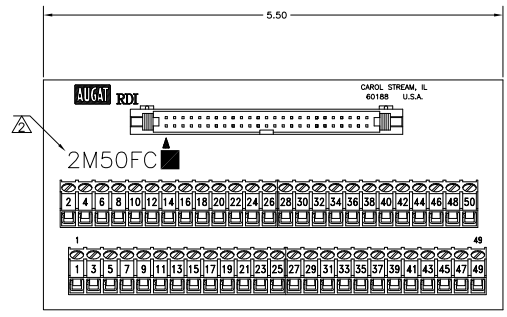

**HEADER:**  
**MATERIALS:**  
 HEADER: COPPER ALLOY, GOLD OVER NICKEL,  
 94V-0 THERMOPLASTIC.  
 CONNECTOR: COPPER ALLOY, GOLD OVER NICKEL,  
 94V-0 THERMOPLASTIC.

**ELECTRICAL:**  
 RATING: 1 AMPERE MAX. (CONNECTOR).

**MECHANICAL:**  
 WIRE RANGE: 26-30 AWG SOLID, 28 AWG STRANDED.

**TERMINAL BLOCK:**  
**MATERIALS:**  
 HOUSING: THERMOPLASTIC NYLON, BLACK, 94V-0  
 TERMINALS: COPPER ALLOY, BRIGHT ACID-TIN OVER  
 COPPER PLATED.  
 SCREWS: 3M, BRASS, NICKEL PLATED

**ELECTRICAL:**  
 RATING: 10A, 300V(U.L.).

**MECHANICAL:**  
 WIRE RANGE: 14-22 AWG.

**MOUNTING:**  
**MATERIALS:**  
 MOUNTING: 2TK2 AND 2TK2D SERIES SNAPTRACK  
 (SOLD SEPARATELY).

⚠ ALL CONNECTOR/STRAIN RELIEF COMPONENTS TO BE  
 SHIPPER LOOSE AND UNASSEMBLED.  
 ⚠ CATALOG NUMBER MARKED HERE.  
 ⚠ CONTAINS NO TIN-LEAD PLATING.

2M50FCL	1776642-1
2M50FC	3-1437684-0
CATALOG NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE	BY	APP	REVISIONS
DESIGNED	BY	DATE	BY	APP	REVISIONS
CHECKED	BY	DATE	BY	APP	REVISIONS
APPROVED	BY	DATE	BY	APP	REVISIONS
CUSTOMER DRAWING		DATE	BY	APP	REVISIONS