

DFLK-D 9 SUB/B

Order No.: 2287135

The illustration shows version DFLK-D37 SUB/B



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2287135>

VARIOFACE panel feed-through module, for direct coupling of single signal lines of up to 2.5 mm², with D-Subminiature socket strip, 9 pos.

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4017918056032 |
| Pack | 5 pcs. |
| Customs tariff | 85369010 |
| Weight/Piece | 0.04545 KG |
| Catalog page information | Page 288 (IF-2009) |

Product notes

WEEE/RoHS-compliant since:
12/21/2007



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|-------------------------------------------|-------------|
| Nominal voltage U _N | 125 V AC/DC |
| Max. current carrying capacity per branch | 2.5 A |
| Max. total current of all branches | 22.5 A |
| Number of positions | 9 |
| Width | 39 mm |

| | |
|-----------------------------------------|-----------------------------------------|
| Height | 33 mm |
| Depth | 58.4 mm |
| Status display | No |
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Mounting position | Any |
| Assembly instructions | In rows with zero spacing |
| Standard - Electrical safety | Air and creepage distances DIN EN 50178 |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|----------------------------------------|---------------------|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | D-SUB connection |
| Type of connection | D-SUB socket |
| Number of positions | 9 |

Certificates / Approvals



Certification CUL, GOST, UL

CUL

| | |
|--------------------------------|-------|
| Nominal voltage U _N | 125 V |
| Nominal current I _N | 2.5 A |


| | |
|-----------------------|-------|
| AWG/kcmil | 30-12 |
| UL | |
| Nominal voltage U_N | 125 V |
| Nominal current I_N | 2.5 A |
| AWG/kcmil | 30-12 |

Accessories

| Item | Designation | Description |
|------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------|
| Cable/conductor | | |
| 2302434 | CABLE D-SUB-S-S-S/.../.../... | Shielded round cable, assembled with two D-SUB male connectors, variable cable length |
| 2302340 | CABLE D-SUB-S/.../.../... | Shielded round cable, assembled with one D-SUB male and one female connector, variable cable length |
| 2299987 | CABLE-D 9SUB/B/S/ 50/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 0.5 m |
| 2299990 | CABLE-D 9SUB/B/S/100/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1 m |
| 2300009 | CABLE-D 9SUB/B/S/150/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 1.5 m |
| 2302010 | CABLE-D 9SUB/B/S/200/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 2 m |
| 2302023 | CABLE-D 9SUB/B/S/300/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 3 m |
| 2302036 | CABLE-D 9SUB/B/S/400/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 4 m |
| 2302049 | CABLE-D 9SUB/B/S/600/ KONFEK/S | Round shielded cable set, with 9-pos. D-SUB female and male connectors, cable length: 6 m |

Diagrams/Drawings

Dimensioned drawing

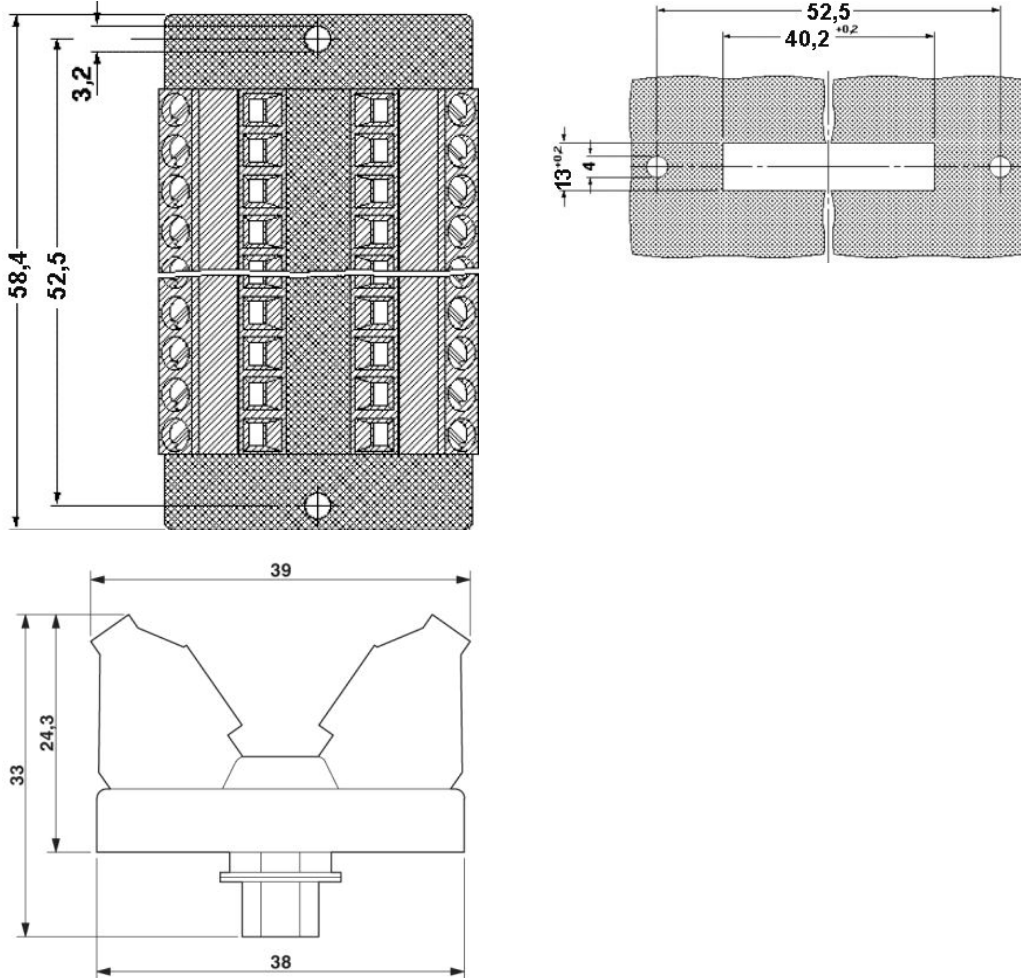

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;