


- NOTES:
1. MATERIAL: SEE TABLE
  2. FINISHES: SEE TABLE
  3. MATES WITH: 50 POSITION MALE D-SUB
  4. END CAP MOUNT SCREW TORQUE: 0.5 N-m (4.4 lbf-in) MINIMUM  
0.6 N-m (5.3 lbf-in) MAXIMUM
  5. TERMINAL BLOCK SCREW TORQUE: 0.8 N-m (7.1 lbf-in)
  6. ASSEMBLY ROHS COMPLIANCE NOT REQUIRED.

TYPICAL SCHEMATIC

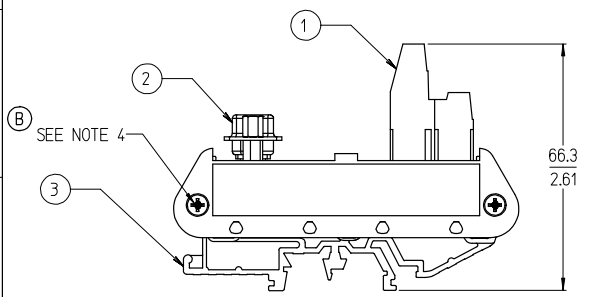

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
3	2	DIN RAIL ADAPTOR UNIT	THERMOPLASTIC	BLACK
2	1	FEMALE D-SUB TO 5.08 FIXED, PC BOARD ASSY.	-	-
1	1	5.08 FIXED, DUAL LEVEL BTS	SEE SD-39880-006	BLACK

ADD SCREW TORQUE EC NO: ETC2007-0331 DRAWN BY: C. YORK 2007/03/17 CHKD: J.MACNEIL 2007/03/14 APPR: J.MACNEIL 2007/03/15	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				MM/IN	1:1	INCH	
				mm			
				INCH			
		4 PLACES ± --- ± ---		DRAWN BY	DATE	TITLE	
		3 PLACES ± --- ± .005		C. YORK	2004/11/15	DIN RAIL INTERFACE MOD, 50 POSITION FEMALE D-SUB TO 5.08MM 2 LEV. FIXED	
		2 PLACES ± 0.13 ± .01		CHECKED BY	DATE	moLEX MOLEX INCORPORATED	
		1 PLACE ± 0.3 ± ---		R. STONE	2004/11/16		
		ANGULAR ± 2 °		APPROVED BY	DATE		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		G. ROBERTSON	2004/11/16		
				MATERIAL NO.	DOCUMENT NO.	SHEET NO.	
				39170-3050	SD-39170-008	1 OF 1	
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			